

- II、Note:
- ① put out the battery from the microphone and draw out the jack of the receiver from power if they will not have been used for a period of time.If the using distance gets short,please replace another new battery;
 - ② Don't put a CD system or laser system together with the main unit to avoid them disturbing each other.
 - ③ If you want the radio sender in a good position,don't tuch the net head of the microphone when you are singing.

III、Accessories:

- ① One double-way jack cord
- ② One operating instructions

IV、Technique Instructions:

Frequency Range: BLE 2402-2480MHz
 Channel number: 79
 S/N Ratio: >58dB
 T.H.D.: <0.05%
 Working Temperature: 0℃-45℃
 Working Range: 30M in good position

Sender、Sending type: GFSK, π/4DQPSK
 Transmit power: 6dB
 Battery: One 9V (4 layers style)
 Battery Time: 10-30 hours
 Length: 190mm
 Weight:
 Receiver、Receiving Type: GFSK, π/4DQPSK
 Antenna type: PCB antenna
 Output resistance: 600Ω (unbalance)
 Receiving Sensitivity: -92dBm
 Size: 300 x 42x110mm
 Working Voltage: AC 110V 60Hz

WARRANTY:
 Supersonic Inc. ("Supersonic") warrants this product to the original purchaser ONLY, to be free from defects in materials and workmanship under normal use, for many 90) DAYS from the date of original purchase. Proof of purchase (receipt) <https://www.supersonic.com/pages/warranty> for additional information.



SC-900 OWNER'S MANUAL Dual Wireless Microphone Receiver System




CAUTION
 Must confirm power voltage and correct terminals used before installing and using. Avoid using in a dirty and dusty surrounding. Avoid using in a over humid surrounding.

Thanks for purchasing this DUAL MIC receiver system. This system is operated by a Receiver and a handle microphone. In order to understand the operating specification, please read the operating method carefully before use.


I、Operating Method

Adjust the amplifier or Karaoke system volume control to the Minimum. Connect the receiver unit to the amplifier or Karaoke system MIC input. Plug the unit in to any 110V AC Jack. Turn the ON/OFF switch to ON. The Red POWER LED goes on.

Front



Back

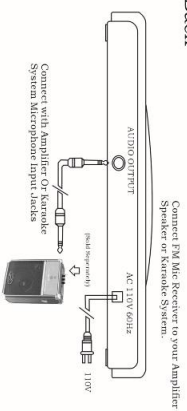

SET UP MICROPHONE

Hold the microphone tightly with your left hand and unscrew the Battery compartment. Then, Turn it counterclock wise according to the following chart shown. Install a 9V battery in to fit the right terminals(+ and-); then close it firmly. Set the MIC switch to the ON position. The Light indicator will not go "on". If the battery is low voltage, it dose, but the indicator or light on the receiver should light up. It shows that the system has been adjusted, and ready to used. Adjust volume control with your amplified speaker or Karaoke machine.

