

QUICK SETUP GUIDE

6-Outlet Wall Tap Surge Protector

NS-WTSP26


PACKAGE CONTENTS

- 6-outlet wall tap surge protector
- *Quick Setup Guide*

FEATURES


- Six AC outlets power multiple electronics at the same time
- Two USB-C ports and one USB-A port (18W total) charge your smartphones, tablets, and more
- 1,800 joules of protection safeguard your connected devices against power surges and spikes
- LED indicator lets you know when your devices are protected

OVERVIEW

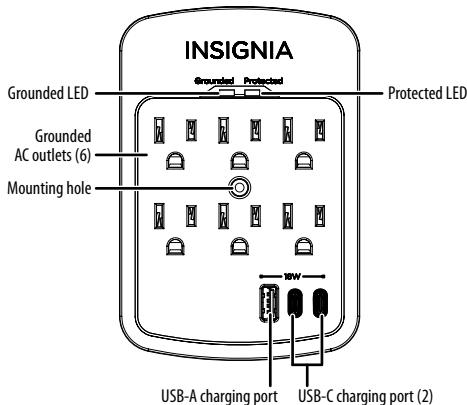


Using one USB-C port

Ideal for tablets and smartphones, a USB-C charging port provides up to 15W of power when used alone.

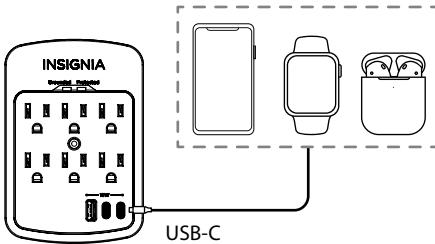


Using the USB-A port

Ideal for smartphones, smartwatches, and earbuds, the USB-A charging port provides up to 12W of power when used alone.

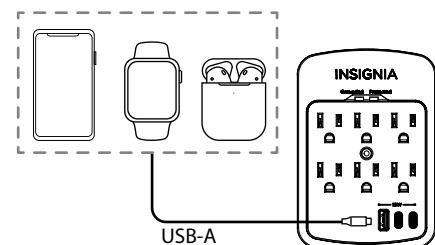

Using multiple USB-A/USB-C ports

When used together, two USB-C charging ports provide up to 18W of power. A USB-C charging port and a USB-A charging port provide up to 18W of power when used together. All three charging ports provide up to 18W of power when used together.

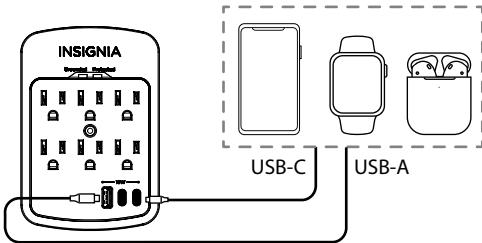

MOUNTING YOUR SURGE PROTECTOR (OPTIONAL)

- 1 Turn off the power to the outlet at your home's circuit breaker.
- 2 Remove the wall plate, then plug in your surge protector.
- 3 Insert the provided mounting screw through the mounting hole and into the wall outlet.
- 4 Turn on the power to the outlet at your home's circuit breaker.

SPECIFICATIONS

- **Dimensions (HxWxL) (not including plug):** 1.39 x 3.74 x 5.51 in. (3.55 x 9.5 x 14 cm)
- **Outlets:** Standard Grounded Outlets (6)
- **Surge Protection:** 1800 Joules
- **USB-A Charging Port (1):** 5V/2.4A
- **USB-C Charging Port (2):** 5V/3A
- **USB Total Output:** 18W

- **Electrical Rating:** 125V/15A/1875W
- **UL Clamping Voltage:** UL1449 4th/800V (L-N, L-G, N-G) **Maximum Peak Current:** 45,000 A
- **3 AC Lines Protected:**
L-N: 15,000A; L-G: 15,000A; N-G: 15,000A
- **Response Time:** Less than one nanosecond
- **Use One Port:** USB-C1/C2: 5V/3A
USB-A: 5V/2.4A
- **Use Multi Ports:** Total 5V/3.6A (shared)
3A Max for USB-C1/C2 and 2.4A Max for USB-A

component at the end of its useful life but will maintain unprotected power to the load.

LEGAL NOTICES

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- It is recommended that a dealer or experienced radio/tv technician is consulted for help.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

ONE-YEAR LIMITED WARRANTY

Visit www.insigniaproducts.com for details.

CONTACT INSIGNIA:

For customer service, call
1-877-467-4289 (U.S. and Canada)
www.insigniaproducts.com

INSIGNIA is a trademark of Best Buy and its affiliated companies
Distributed by Best Buy Purchasing, LLC
7601 Penn Ave South, Richfield, MN 55423 U.S.A.
©2025 Best Buy. All rights reserved.