

KIN36XV

36 INSERT HOOD, 1 MOTOR 560 CFM



- Complete liner solution with variable-speed blower, mesh filtration and bright worktop lighting
- Aluminum mesh filter
- 560 CFM with 3 speed setting and booster
- Digital CFM reducer to 395/295 CFM
- Energy-saving LED lights
- Electronic push buttons controls
- Can be installed in recirculation mode with optional charcoal filter accessories
- Designed and manufactured in Italy
- 2 years parts & labor warranty

PRODUCT FEATURES

Size	36"
Hood type	Built-In
Hood finish	Stainless steel
Motor	1
Speed	3 + Booster
Hood control	Electronic with buttons
Lights	2 LED
Filters type	Aluminum mesh
Extraction power	560 CFM
Sound Level (min)	1.5 Sones
Recirculation	Yes
Duct cover	Not applicable
Duct size	6" diameter

TECHNICAL SPECIFICATIONS

Electrical supply	110 V 60 HZ - 410 W 3.3 Amp
Power connection	NEMA 5-15P with 59" power cord
Certification	CEC,UL
Warranty	2 years parts & labor
Packaging dimensions and weight	W 38 9/16" H 14 3/8" D 16 6/8" 31.53 lbs

OPTIONAL ACCESSORIES


901531	Charcoal filters
901532	Durable charcoal filters
901575	Remote Control

KIN36XV

36 INSERT HOOD, 1 MOTOR 560 CFM




DIMENSIONS

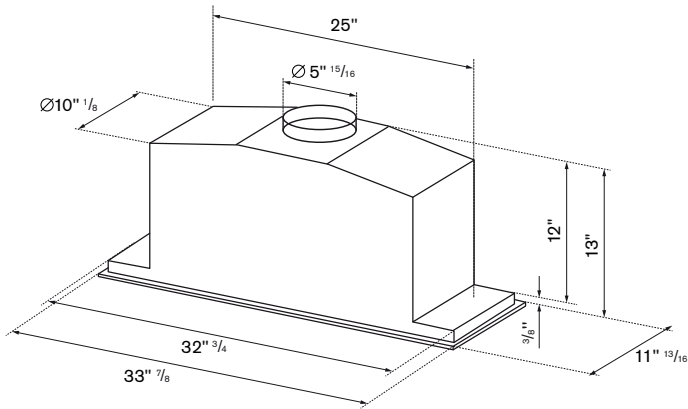


HOOD CLEARANCE

Recommended height above cooking surface
Min 24" for induction/electric worktop
Min 30" for gas worktop

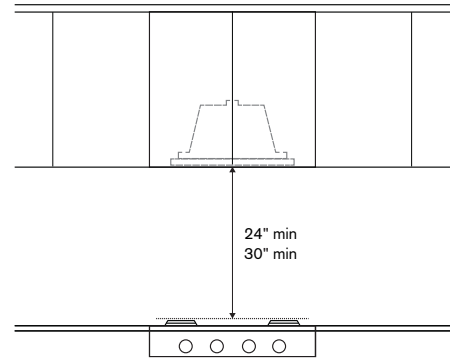

CABINET CUT-OUT

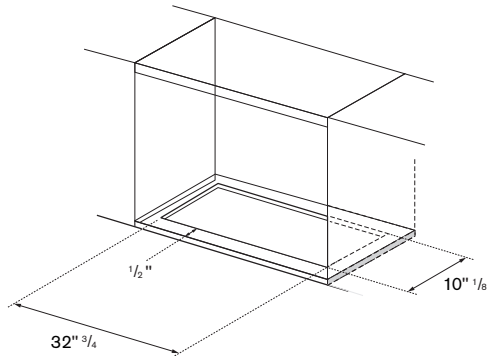

ELECTRICAL CONNECTION

The Power Supply Cord and plug must be connected to a separate 120 Volt AC 60 Hz, 15 Amp or more branch circuit, single grounded receptacle. The cord has a 3-pronged plug and must be installed into an outlet that is properly grounded. The electrical receptacle must be within the minimum cord length of 59".

WHEN USING 3-PRONGED PLUG

