

1215BEV • 15" Beverage Center • 1000 Series

FEATURES & BENEFITS



PERFORMANCE	<ul style="list-style-type: none">• Volume of 3.0 cu ft holds up to 48 bottles (12 oz) or 60 cans (12 oz) and 8 wine bottles (750 ml)• Digital Touch Pad Control is conveniently located on upper face of unit• Temperature range: 34°F - 45°F• Passive cooling system• Wi-Fi ready - Compatible with U-Line U-Connect iOS and Android app
INTERIOR/EXTERIOR	<ul style="list-style-type: none">• Black interior is illuminated with LED lighting that automatically turns off when the door is closed, or can be set to stay on for 3 hours• Three-quarter extension black coated wine racks with natural beech wood fronts allow for easy access• Wine racks accommodate a variety of bottle shapes and sizes• Two adjustable tempered glass shelves• LowE coated, argon gas filled, dual thermopane glass door provides protection from harmful UV Light• Standard commercial stainless steel handle is interchangeable with professional handle accessory• Door swing is field reversible, and is shipped right-hand hinged
INTEGRATION	<ul style="list-style-type: none">• Unit is designed to be built-in or can be freestanding• Solid natural beech wood fronts on wine racks can easily be stained to match surrounding cabinetry• Integrated model requires 3/4" custom door panel (panels not supplied by U-Line)• Four independently adjustable leveling legs provide a precise undercounter fit• Available in the following finishes: Stainless or Integrated

MODEL DETAILS

Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
U-1215BEVS-00A	115 / 60	Field Reversible	Stainless Frame	96 lbs
U-1215BEVINT-00A	115 / 60	Field Reversible	Integrated Frame	93 lbs
U-1215BEVINT-60A	115 / 60	Field Reversible	Integrated Solid	89 lbs


ACCESSORIES

Model	Description	Finish	Shipping Weight
80-54247-00	Professional Door Handle, 1 1/4" Diameter	Stainless	2 lb


1000 Series • 15" Beverage Center • **1215BEV**

DIMENSIONS

Dimensions shown apply to all finishes, including Integrated (INT) models with 3/4" integrated panel/frame installed.

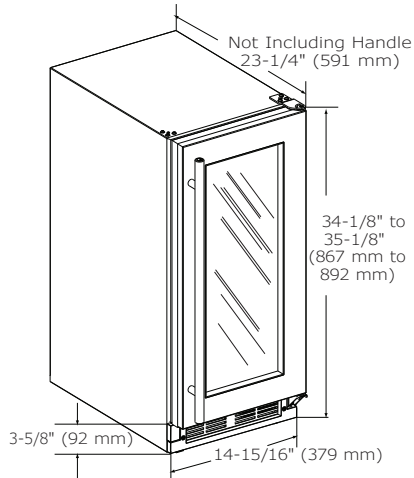

CABINET CUT-OUT

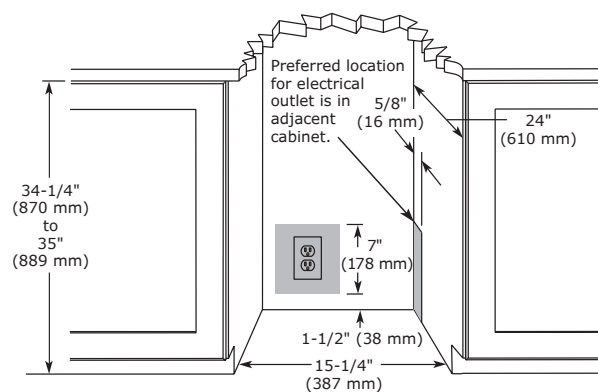

INSTALLATION NOTES

When installing adjacent to wall, ensure 2 1/2" clearance on hinged side for 90° door opening

Cutout includes the additional 1/4" width overall to ensure proper installation.

No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille air flow.

SPECIFICATIONS

Model	1215BEV
Amps: Running	1.2
Capacity: Bottle (12 oz)	48
Capacity: Can (12 oz)	60
Capacity: Volume (cu ft)	3.0
Capacity: Wine Bottle (750 ml)	8
Control Type	Digital Touch Pad
Dimensions: Product Depth	23 1/4" / 591 mm
Dimensions: Product Height	34 1/8" / 867 mm
Dimensions: Product Width	14 15/16" / 379 mm
Energy Consumption: Avg. Per Year	285
ENERGY STAR	No
Panel Height	30 1/4" / 768 mm
Panel Thickness	3/4" / 20 mm
Panel Type	2 3/4" / 70 mm Frame Panel or Solid Panel (-60 suffix)
Panel Width	14 3/4" / 375 mm
Product Weight: Max	89 lbs
Refrigerant Type	R600a
Sabbath (Star K Certified)	Yes
Temperature Range	34°F - 45°F
Wi-Fi Capable	Yes (Production Beginning January 2017)

COOLING SYSTEM



ELECTRICAL REQUIREMENTS

This unit requires a grounded, polarized 115 VAC, 60 Hz, 15 A power supply (normal household current).

Please visit u-line.com to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.



Residential & Commercial



U-Connect
iOS & Android



Warranty