

INSIGNIA™


QUICK SETUP GUIDE

10-Outlet Surge Protector

NS-TOSP26

PACKAGE CONTENTS

- 10-outlet surge protector
- *Quick Setup Guide*

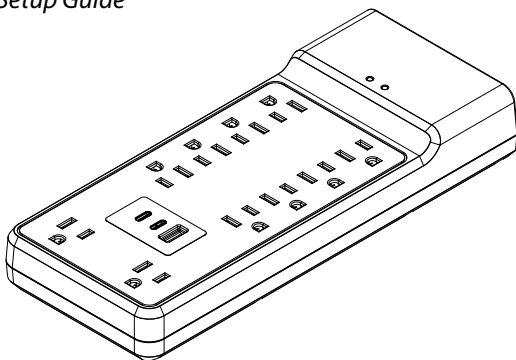


Before using your new product, please read these instructions to prevent any damage.

FEATURES

- Eight standard AC outlets and two wide-spaced AC outlets power multiple electronics at the same time
- Two USB-C ports and one USB port (20W total) charge your smartphones, tablets, and more
- 2,400 joules of protection safeguard your connected devices against power surges and spikes
- 6 ft. (1.83 m) cord length offers flexible placement options
- Low-profile 45° offset plug won't block your other power outlets
- LED indicator lets you know when your devices are protected

OVERVIEW

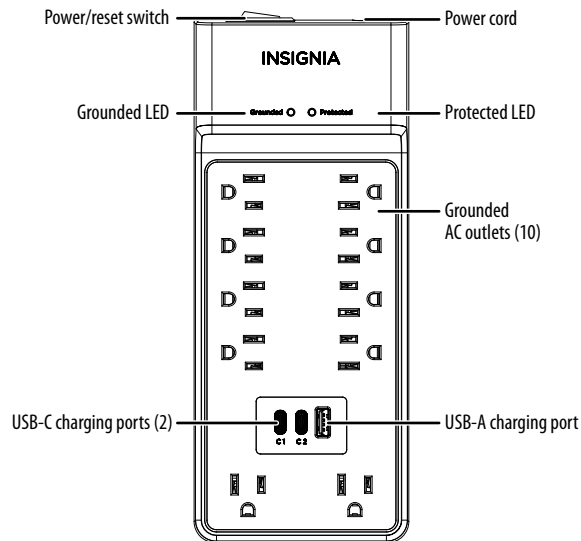


USING YOUR SURGE PROTECTOR

- 1 If needed, mount your surge protector to the wall using two anchored screws that are spaced 3.78 in. (9.6 cm) apart.
- 2 Plug your surge protector in a wall outlet.
- 3 Connect your devices to the surge protector.
- 4 Push the power/reset switch to the **RESET** position. The Grounded and Protected LEDs light to show that your devices are grounded and protected from power surges.
Note: If the protected LED is off, your devices were protected from a power surge. Replace your surge protector.


Using the USB-C1 port

Ideal for tablets and smartphones, a USB-C charging port provides up to 20W of power when used alone.




Using the USB-A or USB-C2 port

- Ideal for smartphones, smartwatches, and earbuds, the USB-A or USB-C2 charging port provides up to 12W of power when used alone.

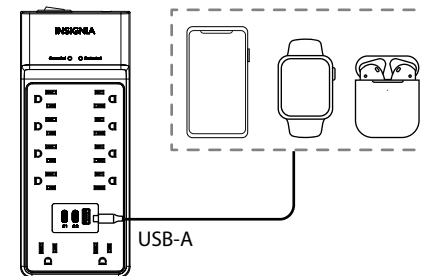

Using multiple USB-A/USB-C ports

When all three ports are used together, USB-C1 provides 15W of power or 20W with PD, and USB-C2 and USB-A provide 5W, for a total of 20W max.

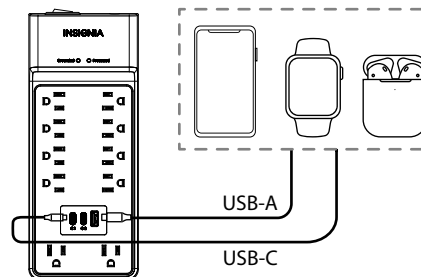

TROUBLESHOOTING

The power/reset switch is OFF.

- The 15A circuit breaker may have tripped. Check your connected equipment and unplug the device that is overloading the circuit, then flip the power/reset switch to **RESET**.

The grounded LED does not light when I plug in my surge protector.

- Move your surge protector to a different grounded three-prong AC outlet. If it still does not light, return the product to the retailer for assistance.
- If your surge protector appears to be working properly, but the grounded LED indicator does not light, your building’s outlets may not be properly grounded and may need to be repaired by a professional electrician.

The protected LED does not light.

- Your surge protector’s AC lines are no longer protected. It may have received a power surge or spike beyond its specified limits, which overloaded the protection circuitry and rendered it inactive. Your surge protector has protected the connected equipment as designed, but it will not protect against future surges or spikes. Replace your surge protector.

SAFETY INFORMATION



CAUTION

READ ALL INSTRUCTIONS BEFORE USING.

- TO REDUCE THE RISK OF ELECTRIC SHOCK - Use only in dry indoor locations.
- DO NOT plug into another relocatable power tap or extension cord.
- DO NOT “daisy chain” surge protectors.
- DO NOT use with any aquarium equipment.
- DO NOT use if correctly grounded outlets are not available.
- DO NOT install this device if there is less than 30 ft. (10 m) of wire between the electrical outlet and electrical service panel.
- Your surge protector features internal protection that, when activated, will disconnect the surge protective component and automatically shut down. When this happens, no power will be provided to the AC outlets or DC ports. Replace your surge protector.

SPECIFICATIONS

- **Dimensions (HxWxL) (not including plug):** 9.76 × 4.01 × 1.61 in. (24.8 × 10.2 × 4.1 cm)
- **Outlets:** Standard grounded AC outlets (10)
- **Power Cord Length:** 6 ft. (1.83 m)
- **Surge Protection:** 2,400 Joules
- **USB-A Charging Port (1):** 5V/2.4A Max
- **USB-C1 Charging Port (1):** 5V/3A, 9V/2.22A Max
- **USB-C2 Charging Port (1):** 5V/2.4A Max
- **USB Total Output:** 20W Max
- **Electrical Rating:** 125V/15A/1,875W
- **UL Clamping Voltage:** UL1449 4th/800V (L-N, L-G, N-G)
Maximum Peak Current: 60,000A
- **3 AC Lines Protected:** L-N: 30,000A; L-G: 15,000A; N-G: 15,000A
- **Response Time:** Less than one nanosecond
- **Circuit Breaker:** Resettable 15A

LEGAL NOTICES

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by

turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- It is recommended to consult the dealer or an experienced radio/TV technician for help.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment.

ONE-YEAR LIMITED WARRANTY

Visit www.insigniaproducts.com for details.

CONTACT INSIGNIA:

For customer service, call
1-877-467-4289 (U.S. and Canada)
www.insigniaproducts.com

INSIGNIA is a trademark of Best Buy and its affiliated companies
Distributed by Best Buy Purchasing, LLC
7601 Penn Ave South, Richfield, MN 55423 U.S.A.
©2025 Best Buy. All rights reserved.