


Package contents

- 7-outlet surge protector
- Quick Setup Guide

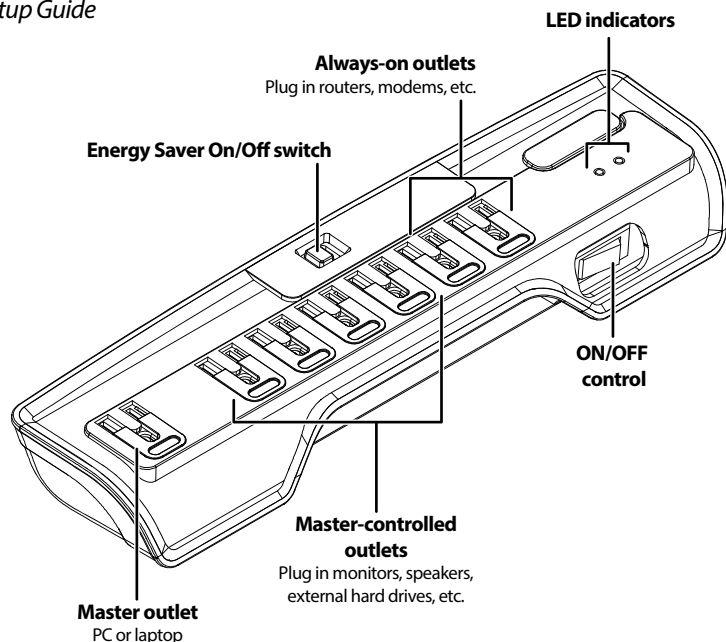

Features

ON/OFF Control—Controls power to all outlets. The switch is also a 15A breaker. When a power surge occurs, this control instantly turns off the Power Manager, protecting devices that are connected to it. When the surge is no longer present, press **ON** to resume normal operations.

LED indicators—When both LEDs are lit, your Power Manager is operating normally, with full surge protection.

- If the Protected LED is NOT lit, it may mean that the surge protector function has reached full capacity, and the unit can no longer provide surge protection. Your Power Manager may need to be replaced.
- If the Grounded LED is NOT lit, it means that your Power Manager is plugged into a non-grounded outlet and that you should use another outlet for full surge protection.

Master outlet—This AC Adapter-spaced outlet controls the four Master-controlled outlets. When a device plugged into this outlet shuts down or enters sleep mode, power to the master-controlled outlets is automatically shut off.

Master-controlled outlets—Devices (monitor, speakers, etc.) plugged into these outlets automatically shut down when the device plugged into the Master outlet shuts down.

Always-on outlets—These outlets stay on as long as the entire Power Manager is switched on. They are not controlled by the Master outlet.

Energy Saver On/Off Switch—When switched to “off”, the energy-saving feature will be disabled, and all outlets will be enabled regardless of the state of the master device.

Using your Master and Master controlled outlets

- (Computers only) Enable the standby mode in your computer’s power management settings.
 - For Windows, open the *Control Panel*, select **Power Options** (may be located under “Systems and Security” within the *Control Panel*) then select a system standby time under **Settings for Power Schemes**.
 - For Macs, open *System Preferences* and select **Energy Saver**.
- Power down your primary device safely, then plug your primary device (such as your computer or your TV) into the Master outlet.
- Plug your secondary devices into the Master-controlled outlets.
 - For computers, this may include your monitor, speakers, external hard drives, etc.
 - For TVs, this may include your DVD player, amplifier, powered sub-woofer, etc.
- Test your configuration by turning on all your primary and secondary devices, then shut down the primary device properly. If the secondary devices all turn off (1-2 seconds) when you turn off the primary device, your Power Manager is working as it should.
- Whenever your primary device goes into standby mode, power is shut off to peripherals plugged into the Master-controlled outlets. When the computer “awakens”, the surge protector immediately supplies power to these peripherals.

Note: Only connect devices to the Master-controlled outlets that are only used when the master device (e.g. computer) is operating.

Note: Some computers continue to consume more than 10W of power in standby mode. The Master outlet may not recognize the standby mode, and the Master-controlled outlets will not shut off. If this occurs, make sure Hibernates/Sleep mode is also enabled on your computer under power management settings, or check with your computer’s manufacturer.

Note: Many laptops consume more than 10W of power while the battery is charging. In this case, the master-controlled outlets will not turn off until the laptop battery is fully charged and power consumption is reduced.

Troubleshooting

Problem:	Solution:
Equipment connected to your Power Manager does not turn on.	<ol style="list-style-type: none"> 1 Make sure that your Power Manager is plugged into a working, grounded AC outlet. 2 Check all power connections and make sure that the power outlet is not switched (and turned off). NOTE: Test the outlet with a working lamp. Try both top and bottom outlets. 3 Make sure that the Power Manager switch and connected devices are turned on.
Components have AC power but still don't work.	<ol style="list-style-type: none"> 1 Make sure that all power cords are connected correctly. 2 Make sure that all devices are turned on and working properly. NOTE: Try plugging the devices in question directly to the wall. 3 Make sure that the primary device (computer or TV) is turned on and is not in standby or sleep mode.

Safety information

- To ensure the safety of children and to avoid electric shock and damage from a high-dust environment, slide the plastic outlet cover over outlets that are not in use.
- To protect your phone, fax, or modem from surges, plug the phone line from the wall outlet into the IN port and phone/fax/modem line(s) into the OUT port(s).
- To protect your cable modem or TV/TV tuner from surges, connect your coax cable from the wall outlet into the IN coax port, then connect a coax cable from the OUT coax port to the device.
- DO NOT install this device if there is not at least 30 feet (10 meters) or more of wire between the electrical outlet and electrical service panel.

Specifications	
Outlets:	7
Power cord:	6 ft. (1.8 m) Soft-Flex™ right-angle plug
Joules rating:	2100
Connected equipment warranty:	\$200,000
Continuous Duty Electrical Rating:	15A / 125V / 1875W
Maximum Energy Dissipation and H-N / H-G / N-G values:	2100J/105,000A
Maximum Spike Current and H-N / H-G value / N-G values:	6,000V/105,000A (H-N 45,000A) (H-G 30,000A) (N-G 30,000A)
UL Clamping Voltage:	UL 1449/ 330V(L-N)400V(L-G,N-G)
Response Time:	Less than 1 nanosecond
EMI/RFI Noise Filtration:	150K Hz - 100M Hz, Up to 43dB

One-year limited warranty

Visit www.rocketfishproducts.com for details.

We’re here for you:

For customer service, call 1-800-620-2790 (U.S. and Canada) or 01-800-926-3010 (Mexico) www.rocketfishproducts.com

ROCKETFISH is a registered trademark of BBY Solutions, Inc. Registered in some countries. Distributed by Best Buy Purchasing, LLC, 7601 Penn Ave South, Richfield, MN 55423 U.S.A.

BEST BUY IMPORTS S. DE R.L. DE C.V.
AVENIDA SANTA FE NO. 440 PISO 2 OFNA 202 Y 203 P3 Y P4
COLONIA SANTA FE CUAJIMALPA, C.P. 05348, DELEGACIÓN
CUAJIMALPA DE MORELOS, MEXICO, DISTRITO FEDERAL

©2013 BBY Solutions, Inc. All Rights Reserved.