

Installation Guide

PCAM-CHMSL2-GM14



Third Brake Light Camera with Cargo and Side Blind Spot Views

Silverado AND Sierra Light Duty (2014-2018)
Silverado AND Sierra Heavy Duty (2015-2019)



ECHOMASTER
PRO



Introduction

Thank you for purchasing your EchoMaster Pro automotive camera.

EchoMaster cameras are designed to improve safety while driving by providing high quality images of surrounding areas and obstacles in the vicinity of the vehicle. They will also improve vehicle maneuvering capability by displaying blind spots not normally visible to the driver.

Please ensure you read and understand all aspects of this manual before installing or using your EchoMaster camera.

Key Features

- ▶ 1/3" CMOS Sensor
- ▶ Operates at 0.3 LUX
- ▶ Water/debris proof rating: IP67
- ▶ 3 Viewing Angles
 - Right 95°
 - Left 95°
 - Rear 90 °

PCAM-CHMSL2-GM14

Third Brake Light Camera



Box Contents

- ▶ Third Brake Light Camera and Bracket
- ▶ 17.5' Extension Cable
- ▶ Camera Adjustment Tool
- ▶ Installation Guide
- ▶ Warranty Card



Illustrations are typical and may not match exact vehicle details.



Installing the CHMSL Camera


Step 1

Remove the 2 screws that secure the third brake light.



Step 2


a. Remove the third brake light from the vehicle and disconnect connector.

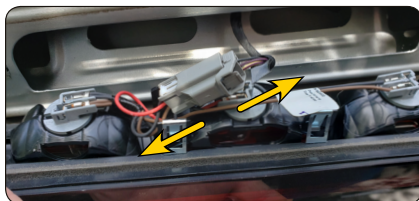

b. Place the third brake light onto the third brake light camera bracket and line up the screw holes.




c. Reconnect the third brake light to the factory connector.

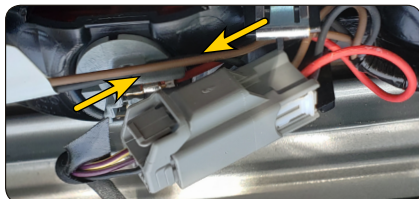

Step 3

Using a long zip tie or fish tape with the camera cable attached to it, feed the camera cable from the third brake light opening into the vehicle and towards the b / c pillar to the right or the left. (The weather seal may need to be removed to gain access to the fish tool used to run the cable.)

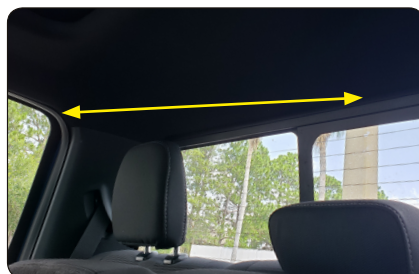


PCAM-CHMSL2-GM14

Third Brake Light Camera




Step 4

Connect the extension cable to the camera.

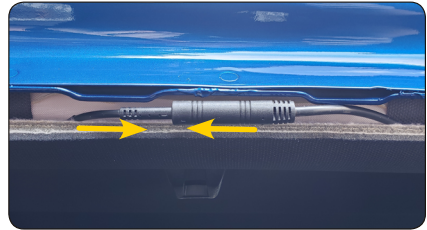


Step 5

Route the cable to the front of the vehicle and behind the radio, monitor, or mirror monitor.

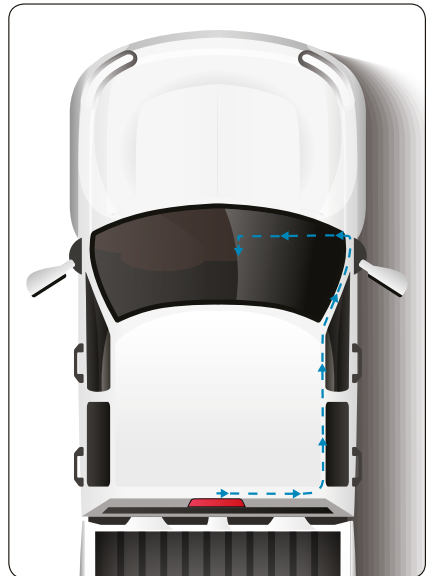

Step 6

Remount third brake light and camera assembly using the original screws.

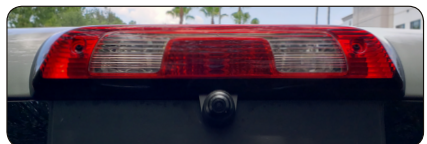



Step 7

Route the reverse and turn signal wires to their respective locations according to the table below

2014 - 2018 (1500) / 2015 - 2019 (2500/3500)			
Turn Signal (Left)	Blue/White	+	BCM under driver dash, Brown 26 pin plug, pins 2
Turn Signal (Right)	Green/Violet	+	BCM under driver dash, Black 26 pin plug, pins 3
Reverse Light	Blue/Brown	+	BCM under driver dash, Brown 26 pin plug, pin 26



Brown
26 pin plug Black
26 pin plug


PCAM-CHMSL2-GM14

Third Brake Light Camera




Step 8

Connect the yellow video RCA to the rear camera input on the radio, monitor, or mirror monitor.

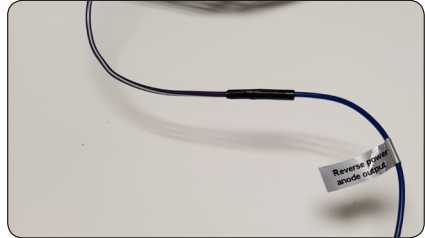

Step 9

Connect the Blue "Reverse power anode output" wire to the reverse trigger input on the radio, monitor, or mirror monitor.

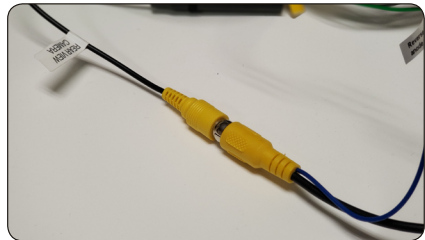

Step 10

With the ignition in the on position, shift the vehicle into reverse.

Step 11

Using the supplied tool, adjust the cameras view to desired position. (Keep in mind that this adjustment will effect the blind spot view. It may be necessary to trigger the blind spot view to confirm desired position.)





Using the CHMSL Camera

Rear Cargo View Camera

With the ignition in the on position, shift the vehicle into reverse. The image should appear on the screen.



Left Blind Spot Camera

With the ignition in the on position, apply the left turn signal. The image should appear on the screen.



Right Blind Spot Camera


With the ignition in the on position, apply the right turn signal. The image should appear on the screen.



PCAM-CHMSL2-GM14 Third Brake Light Camera



Views


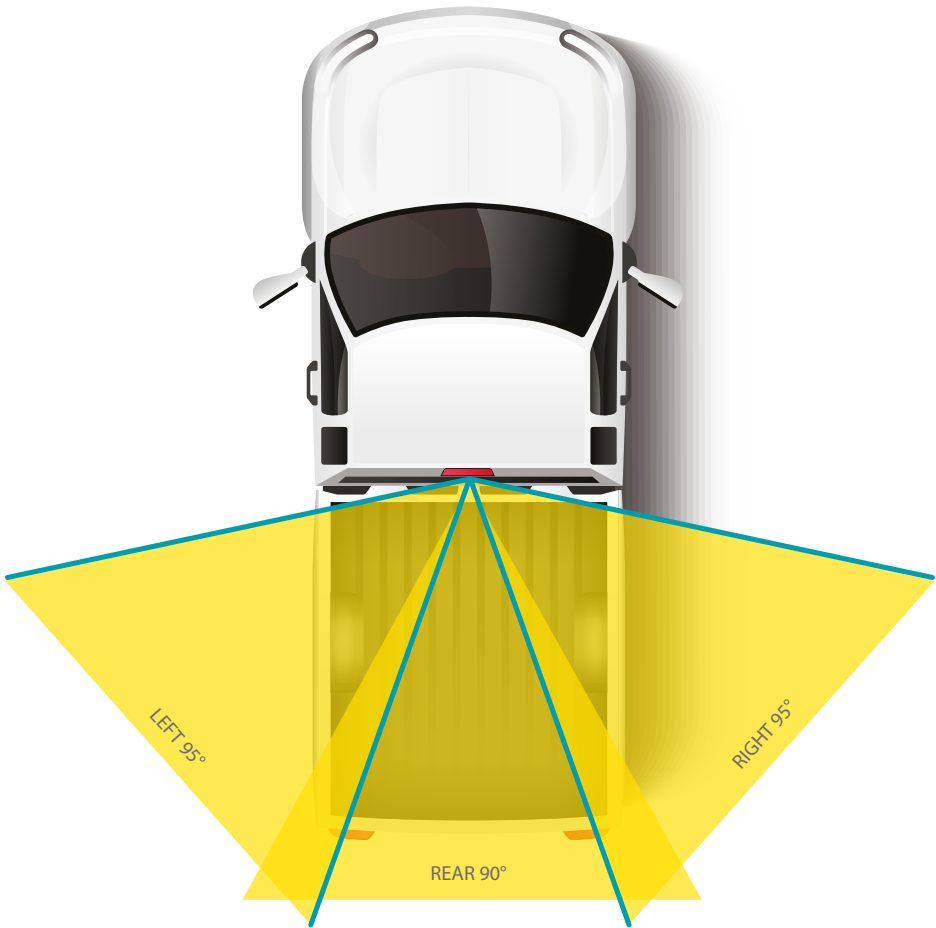




PCAM-CHMSL2-GM14

Third Brake Light Camera

Wiring Diagram

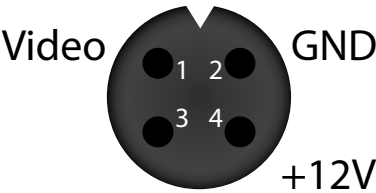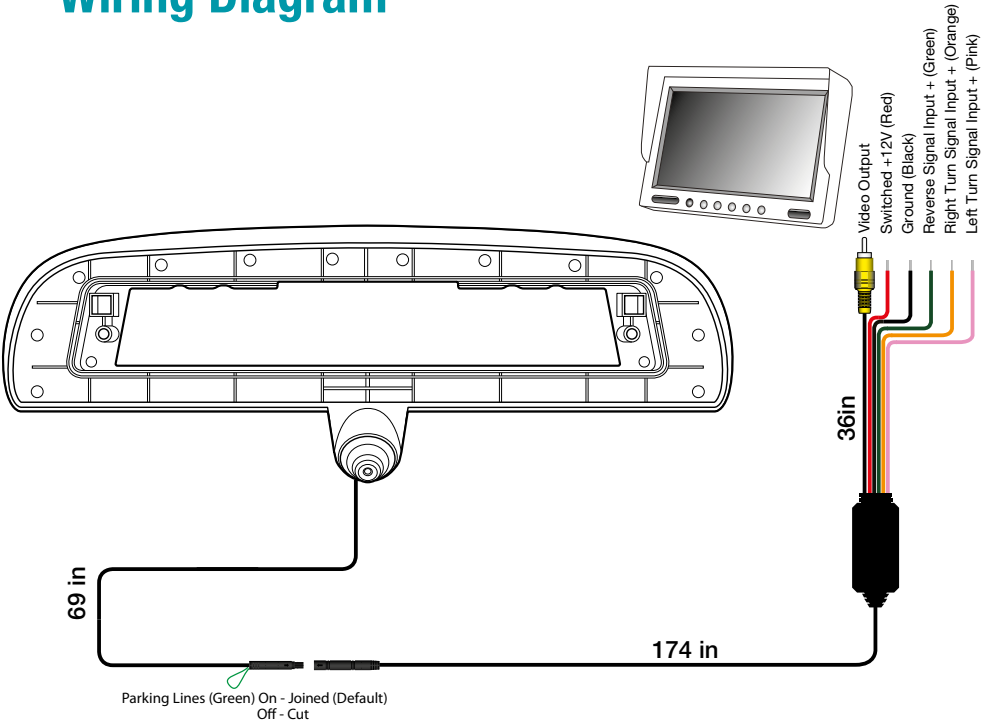

PCAM-CHMSL2-GM14

Third Brake Light Camera



Notes:

AGREEMENT: End user agrees to use this product in compliance with the instructions and terms of use above and with all State and Federal laws. ECHOMASTER provides instructions and safety warnings with respect to this product and disclaims all liability for any use not in conformity with those instructions or other misuse of its product. If you do not agree, please discontinue use immediately and contact EchoMaster. This product is intended for off-road use and passenger use only.



email - support@aampglobal.com
tel- 866-766-2267



Clearwater Florida 33760
EchoMaster is a Power Brand of AAMP Global
www.EchoMaster.com

PCAM-CHMSL-FD99
REV. 060619