


DURACELL®

DL123A

Size: $\frac{2}{3}$ A

Lithium/Manganese Dioxide Battery



Li/MnO₂

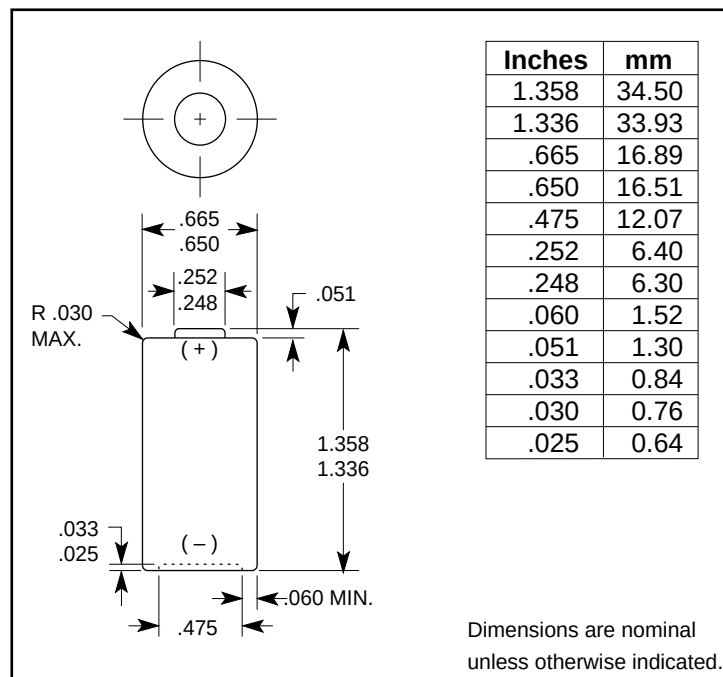

SPECIFICATIONS

Nominal Voltage:	3.0 V
Typical Voltage:	3.2 – 3.3 V
Rated Capacity:	1,400 mAh at 100 Ω to 2.0 V at 20°C (68°F)
Average Weight:	0.60 oz. (17.0 g)
Volume:	0.438 in. ³ (7.18 cm ³)
Terminals:	Flat, Recessed Negative Terminal
Operating Temp. Range:	-40°C to 60°C (-40°F to 140°F)
NEDA/ANSI:	5018 LC
IEC:	CR17345

Note: Designed for 3-volt user-replaceable application.

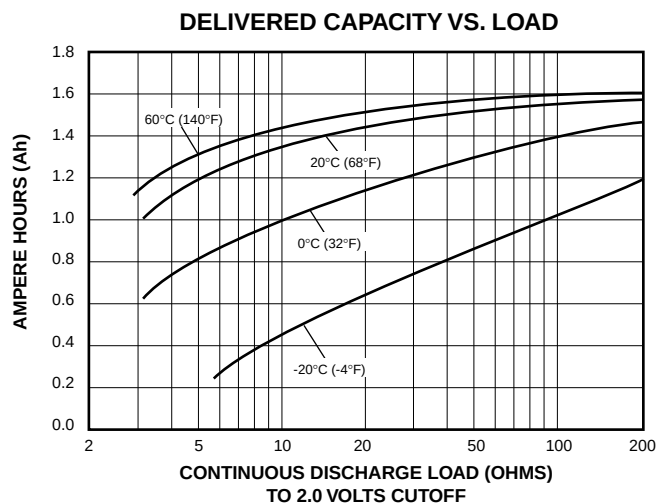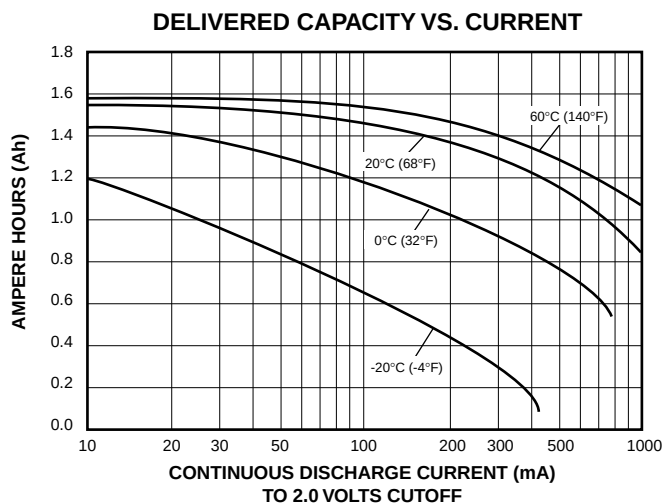

DURACELL INC.


New Products and Technology Division
Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-431-2656
Outside North America: 203-791-3274
Facsimile: 203-791-3273
Internet: www.duracellnpt.com




Printed in U.S.A. on recycled paper, please recycle after use.

DL123A-2/93


CONTINUOUS DISCHARGE AT 60°C (140°F)

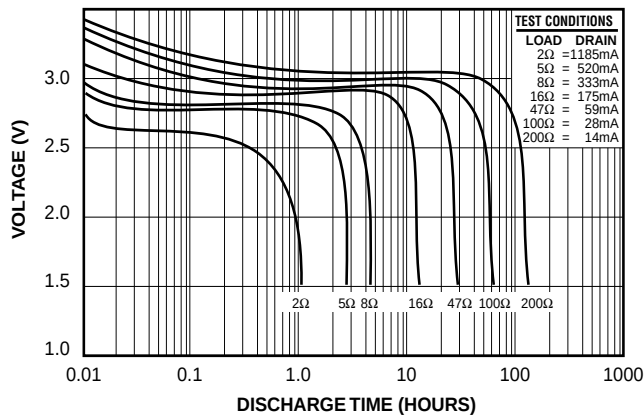


CONTINUOUS DISCHARGE AT 20°C (68°F)

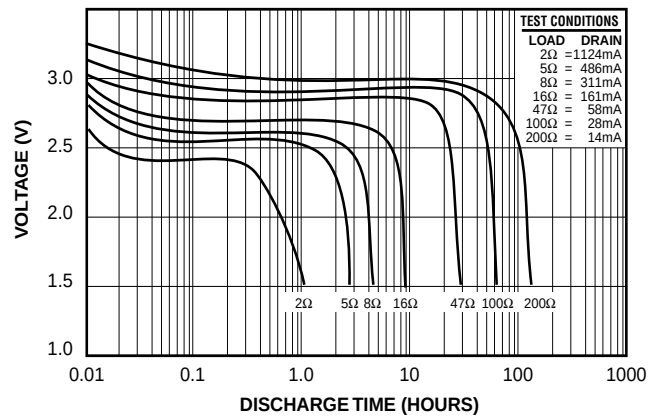


CONTINUOUS DISCHARGE AT 0°C (32°F)

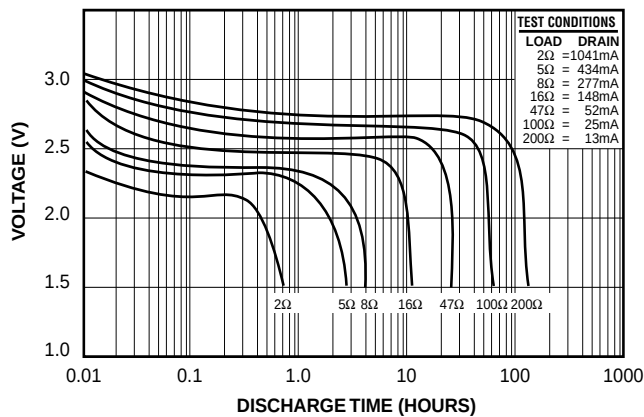

CONTINUOUS DISCHARGE AT -20°C (-4°F)

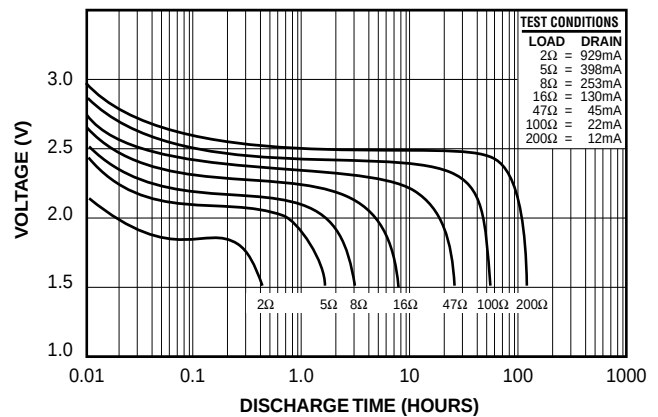

PULSE DISCHARGE AT DIFFERENT DUTY CYCLES
1.2A, AT 20°C (68°F)

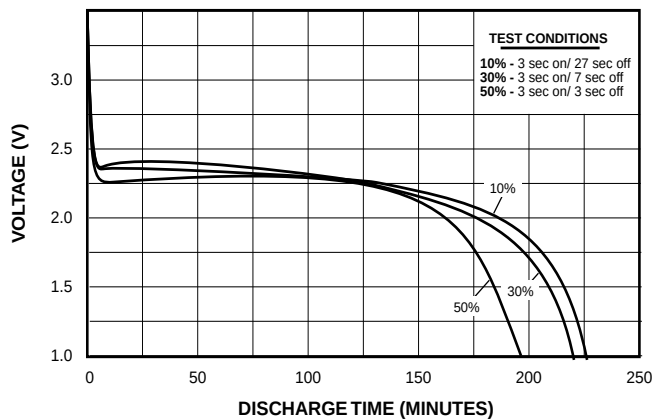

PULSE DISCHARGE AT DIFFERENT TEMPERATURES
1.2A, 3 SECONDS ON/7 SECONDS OFF

