

EN

With your inspiring rating, COSTWAY will be more consistent to offer you EASY SHOPPING EXPERIENCE, GOOD PRODUCTS and EFFICIENT SERVICE!

DE

Mit Ihrer inspirierenden Bewertung wird COSTWAY konsistenter sein, um Ihnen EIN SCHÖNES EINKAUFSERLEBNIS, GUTE PRODUKTE und EFFIZIENTEN SERVICE zu bieten!

FR

Avec votre évaluation inspirante, COSTWAY continuera à fournir une EXPÉRIENCE D'ACHAT PRATIQUE, des PRODUITS DE QUALITÉ et un SERVICE EFFICACE !

ES

Con su calificación inspiradora, COSTWAY será más consistente para ofrecerle EXPERIENCIA DE COMPRA FÁCIL, BUENOS PRODUCTOS y SERVICIO EFICIENTE.

IT

Con la tua valutazione incoraggiante, COSTWAY sarà più coerente per offrirti ESPERIENZA DI ACQUISTO FACILE, BUONI PRODOTTI e SERVIZIO EFFICIENTE!

PL

Dzięki twojej opinii COSTWAY będzie mógł oferować jeszcze WYGODNIEJSZE ZAKUPY, LEPSZE PRODUKTY i SPRAWNIEJSZĄ OBSŁUGĘ KLIENTA.

US office: Fontana


UK office: Ipswich

AU office: Truganina

DE office: Hamburg


FR office: Saint Vigor d'Ymonville

PL office: Gdańsk

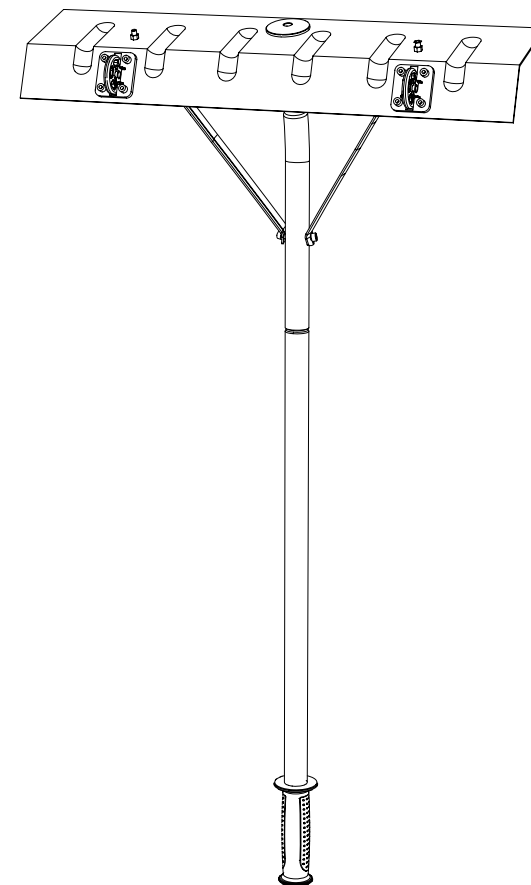

USER'S MANUAL

Snow Roof Rake NP10216

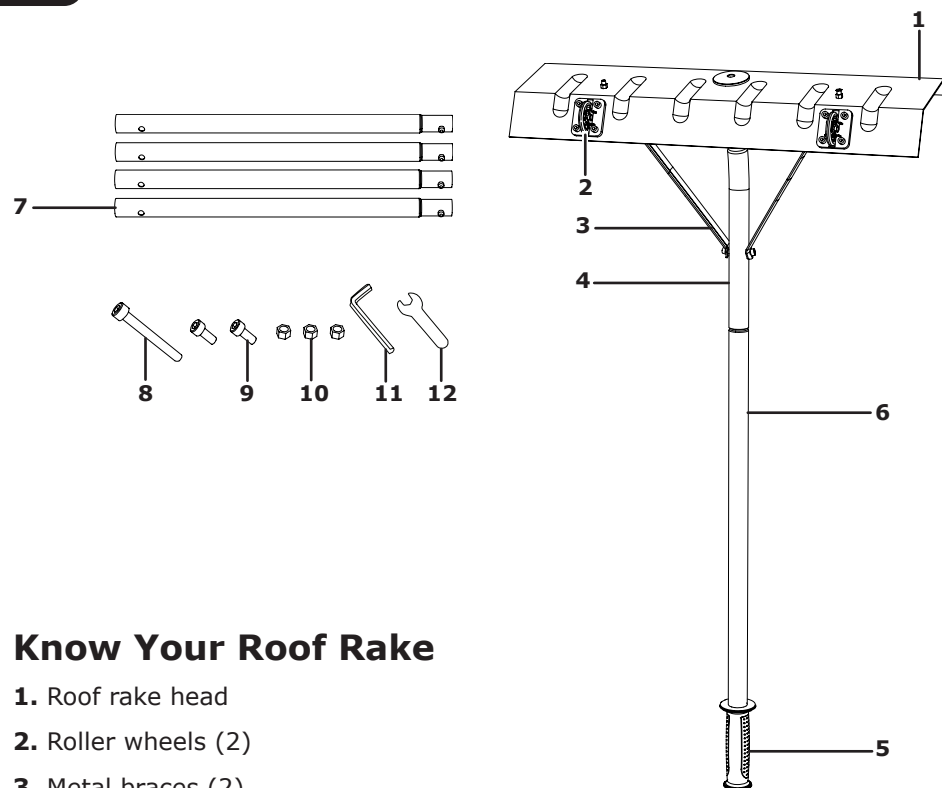


Know Your Roof Rake

1. Roof rake head
2. Roller wheels (2)
3. Metal braces (2)
4. Pole adapter
5. Handle grip
6. Pole handle
7. Pole extensions (4)
8. Long bolt
9. Short bolts (2)
10. Nuts (3)
11. Hex wrench
12. Open wrench


Roof Rake Head Assembly

The assembly of the roof rake head requires hardware (nuts and bolts) included in the pack. Use the equipped open wrench for nuts and the hex wrench for bolts. Make sure to tighten the hardware connections for a secure assembly.

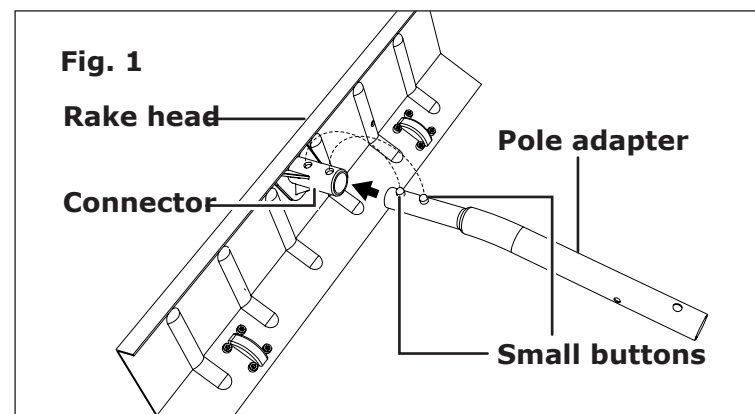


1. Depress the small buttons on the pole adapter and insert the pole adapter into the connector on the back of the roof rake head. Push firmly until the two small buttons pop up in the holes on the connector (Fig. 1).

- Align the holes of the metal braces with the hole on the end of the pole adapter. Secure with the long bolt and one nut (Fig. 2).

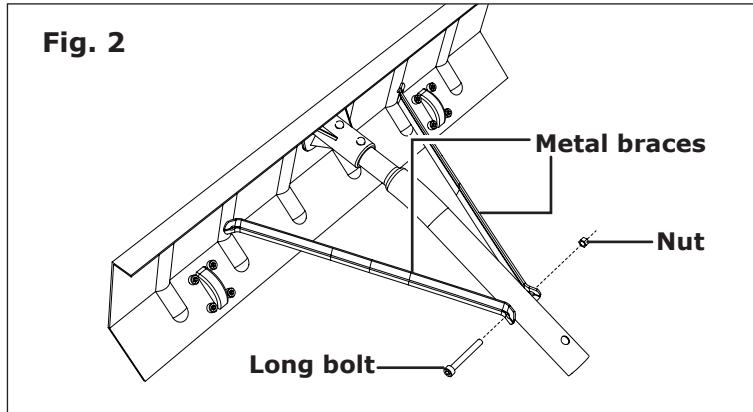


- Connect the metal braces to the rake head with 2 small bolts and the remaining nuts, as shown (Fig. 3).

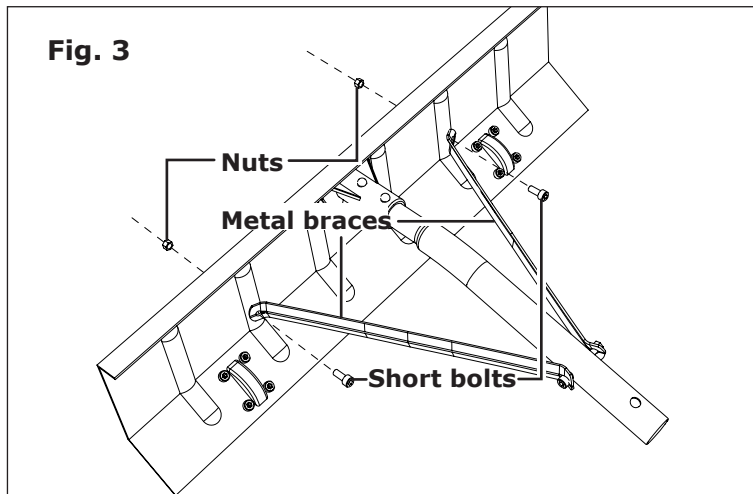


Connecting the Poles

- To connect the roof rake head assembly with the pole handle, depress the small button at the end of the pole handle and insert it into the end of the pole adapter. Make sure the small button pops up in the hole on the pole adapter so the assembly is secured (Fig. 4).

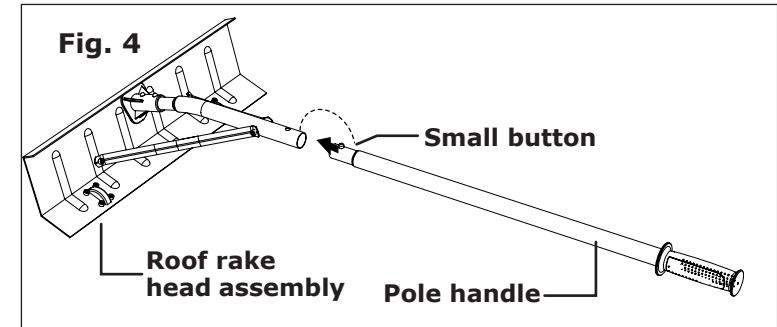

- If additional reach is needed, connect the provided pole extensions between the pole handle and the rake head assembly. Make sure the small buttons pop up in the hole on the pole so the assembly is secured (Fig. 5).

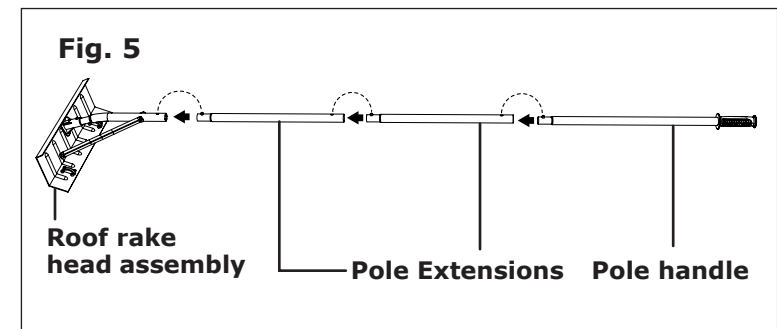

NOTE: Make sure the pole handle is the last piece of the assembly.

NOTE: Only connect the minimum number of pole extensions needed to reach the roof. This will minimize the weight of the roof rake and reduce the effort required.