



Website: [www.jtechdigital.com](http://www.jtechdigital.com)  
TollFree: 1-888-610-2818  
Email: [support@jtechdigital.com](mailto:support@jtechdigital.com)

---

## USER MANUAL

---

J-Tech Digital® 4K 60HZ HDMI Audio Extractor  
Converter SPDIF + 3.5MM Output Supports HDMI  
Model: JTD18G-H5CH



## Thank you for purchasing this product

For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

## Surge protection device recommended

This product contains sensitive electrical components that may be damaged by electrical spikes, surges, electric shock, lightning strikes, etc. Use of surge protection systems is highly recommended in order to protect and extend the life of your equipment.

## Table of Contents

<b>1. Introduction</b>	<b>2</b>
<b>2. Features</b>	<b>2</b>
<b>3. Package Contents</b>	<b>3</b>
<b>4. Specifications</b>	<b>3</b>
<b>5. Operation Controls and Functions</b>	<b>5</b>
<b>6. Connection Diagram</b>	<b>7</b>

## 1. Introduction

The HDMI 18Gbps Audio Extractor could extract audio signals from any HDMI compliant source to digital optical or analog stereo L/R audio outputs. Further, both input and output HDMI support video resolution up to 4K2K@50/60Hz (YUV444). It supports 10bits HDR (High Dynamic Range) pass through and HDMI high resolution digital audio formats bypass, LPCM 2CH, Dolby TrueHD, Dolby Digital Plus, Dolby Atmos and DTS-HD Master Audio, audio sampling rate up to 192 kHz. HDCP 2.2 and CEC bypass are supported.

## 2. Features

- ✧ HDMI 2.0b (18Gbps), HDCP 2.2 and DVI compliant
- ✧ Video resolutions up to 4K2K@50/60Hz (YUV444)
- ✧ Extracts HDMI audio to multi-channel optical (SPDIF) or L/R analog audio
- ✧ Optical audio supports LPCM 2CH, Dobby Digital 2/5.1CH, DTS 2/5.1CH
- ✧ Supports HDMI High Bit Rate(HBR) audio pass through
- ✧ Audio sample rates up to 192kHz
- ✧ 10bits HDR (High Dynamic Range) pass through
- ✧ Supports CEC bypass

### 3. Package Contents

- ✦ 1 x HDMI 18Gbps Audio Extractor
- ✦ 1 x 5V/1A Power Adaptor
- ✦ 1 x User Manual


### 4. Specifications

Technical	
<b>HDMI Compliance</b>	HDMI 2.0b
<b>HDCP Compliance</b>	HDCP 2.2 and HDCP 1.4
<b>Video Bandwidth</b>	18Gbps
<b>Video Resolutions</b>	up to 4K2K@50/60Hz(YUV4:4:4), 4K2K@30Hz, 1080P@120Hz, and 1080P 3D@60Hz
<b>Color Space</b>	RGB, YCbCr 4:4:4, YCbCr 4:2:2
<b>Color Depth</b>	10-bit, 12-bit
<b>HDMI Audio Formats (Pass-through)</b>	LPCM 2/5.1/7.1CH, Dolby Digital, DTS 5.1, Dolby Digital+, Dolby TrueHD, DTS-HD Master Audio, Dolby Atmos, DTS:X
<b>Optical Audio Formats</b>	LPCM 2CH, Dolby Digital 2/5.1CH, DTS 2/5.1CH
<b>L/R Audio Formats</b>	Analog Stereo 2CH
<b>ESD Protection</b>	Human body model — ±8kV (air-gap discharge) & ±4kV (contact discharge)

<b>Connections</b>	
<b>Inputs</b>	1x HDMI Type A [19-pin female]
<b>Outputs</b>	1x HDMI Type A [19-pin female] 1x L/R Audio Out [3.5mm Stereo Mini-jack] 1x Optical Out [S/PDIF]
<b>Mechanical</b>	
<b>Housing</b>	Metal Enclosure
<b>Color</b>	Black
<b>Dimensions</b>	73.5mm [W] x 60.7mm [D] x 17mm [H]
<b>Weight</b>	130g
<b>Power Supply</b>	Input: AC100 - 240V 50/60Hz Output: DC 5V/1A (US/EU standards, CE/FCC/UL certified)
<b>Power Consumption</b>	1W(Max)
<b>Operation Temperature</b>	32 - 104°F / 0 - 40°C
<b>Storage temperature</b>	-4 - 140°F / -20 - 60°C
<b>Relative Humidity</b>	20 - 90% RH (no condensation)


## 5. Operation Controls and Functions

### 5.1 Front Panel

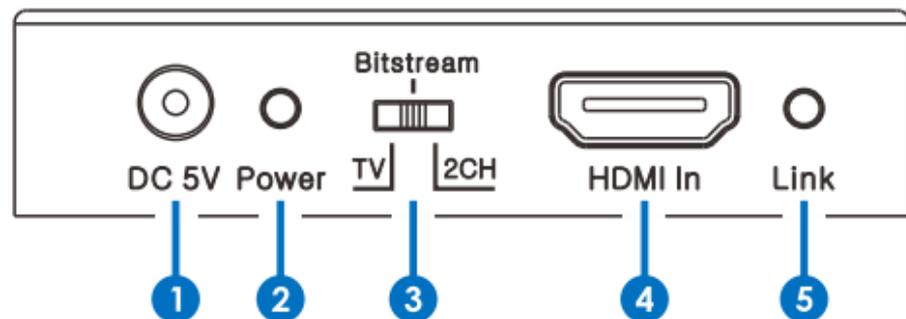


- 1 DC 5V:** Connect 5V/1A adaptor to AC wall outlet for power supply.
- 2 Power LED:** System power indicator.
- 3 TV / Bit Stream / 2CH:** This allows users to select audio format according to TV, Bit Stream or LPCM 2CH.
- 4 HDMI In:** Connect this to HDMI source devices such as Blu-ray or PS4 player
- 5 Link LED:** The LED will illuminate when detected HDMI input signal

## 5.2 Rear Panel

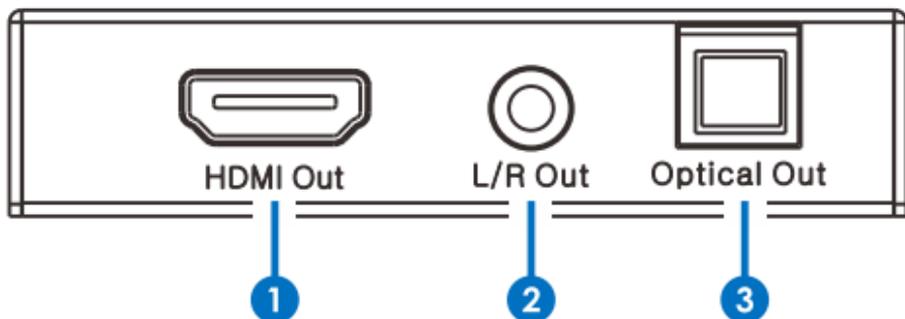

- ❶ **HDMI Out:** Connect to HDMI display devices such as TV/ Projector.
- ❷ **L/R Out:** Connect to audio amplifier or TV L/R audio input port.
- ❸ **Optical Out:** Connect to audio amplifier optical audio input port.

## 6.Connection Diagram

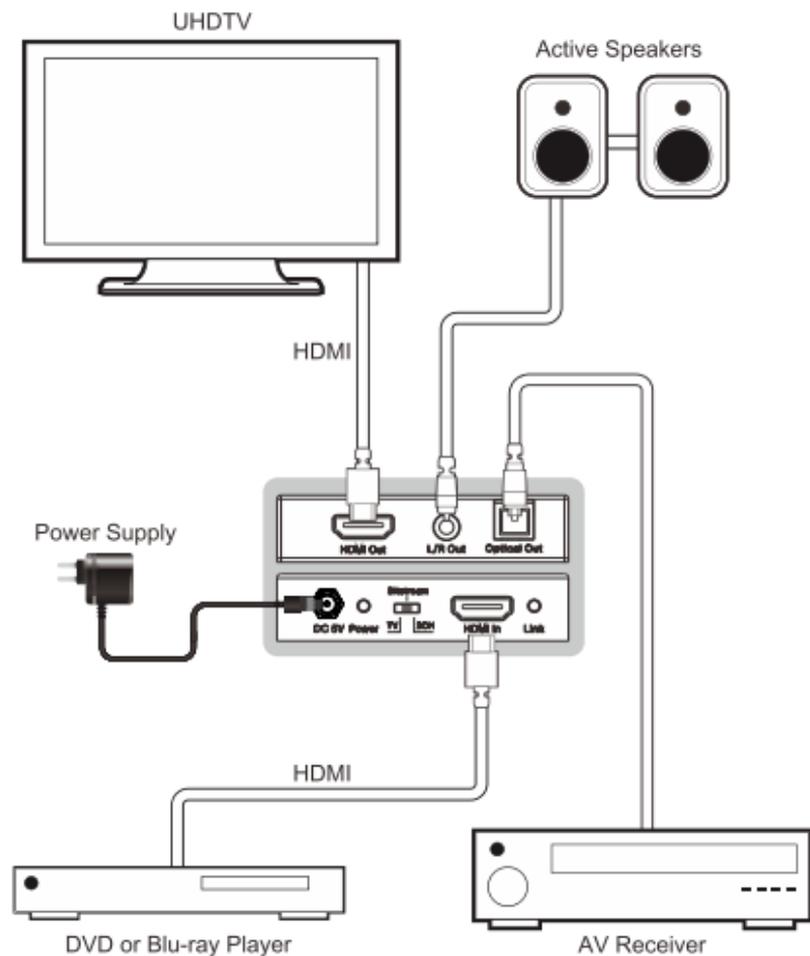



Scan this QR code using your smartphone to view the full J-Tech Digital Product Lineup!



Have more questions? Scan this QR code using your smartphone to contact us!



[www.jtechdigital.com](http://www.jtechdigital.com)

J-Tech Digital®  
12803 Park One Drive  
Sugar Land, TX 77478

- Product pictures are for reference only.
- Specifications, pictures & software described herein are subject to change without prior notification.
- Only use the provided power supply when operating this unit. J-Tech Digital® is not responsible for any damage due to customer neglect.
- All trademarks are the sole property of their respective companies.
- Copyright © J-Tech Digital, Inc. All rights reserved.