

V1
FINAL
FOR PRINT



NS-HW503_18-0579_QSG_V1_en.ai 1 7/6/2018 4:45:25 PM

Final flat size: 11.54 x 9.88 in. (293 x 251 mm)
Final fold size: 5.77 x 9.88 in. (146.6 x 251 mm)



QUICK SETUP GUIDE

8-Outlet Surge Protector

NS-HW503

FEATURES

- Eight outlets to easily connect your TV and AV components
- 600 joules of surge protection keep your system safe
- 4 ft. (1.2 m) power cord for flexible placement
- Sleek black housing matches most modern home theater electronics
- 32 dB EMI/RFI noise filtering prevents interference


Before using your new product, please read these instructions to prevent any damage.



PACKAGE CONTENTS

- Surge protector
- Quick Setup Guide

OVERVIEW

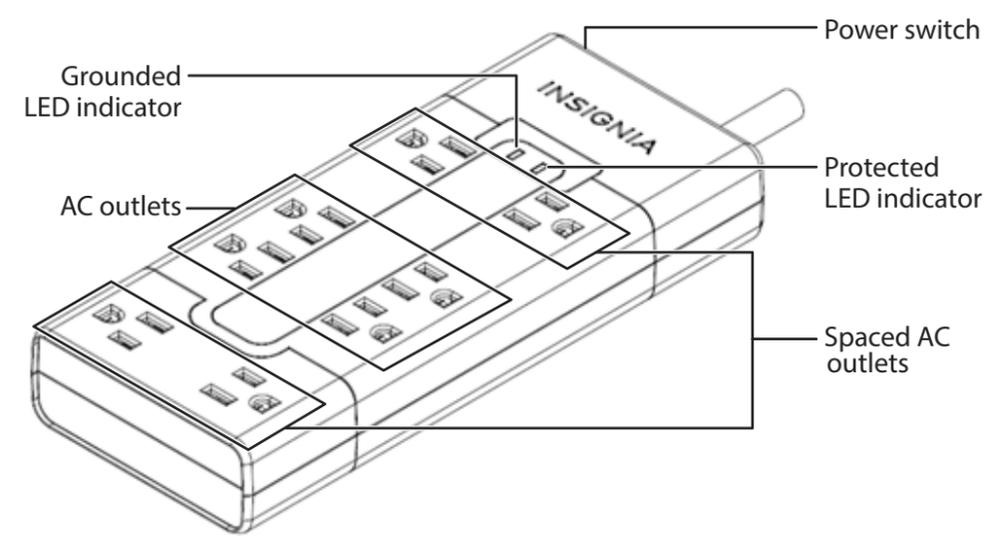

USING YOUR SURGE PROTECTOR

- 1 Plug your surge protector into a standard (125V) wall outlet. If the LEDs don't light up, make sure that the power switch is in the ON position.
Note: If the protection LED does not turn on, your surge protector cannot absorb additional power surges or spikes. Replace your surge protector.
- 2 Plug up to eight devices into the surge protector's outlets, using the spaced outlets for bulkier adapters. You may need to push firmly to insert the plug.

UNDERSTANDING LED INDICATORS

- **Grounded LED indicator:** Lights when connected to a properly grounded outlet. If this LED doesn't light, connect to a different outlet or contact an electrician to inspect your outlet's wiring.
- **Protected LED indicator:** Lights to show that your devices are protected from power surges. If this LED doesn't light, your surge protector cannot absorb additional power surges and you must replace your surge protector.





SPECIFICATIONS

- **Dimensions without power cord (L×W×H):**
8.7 × 3.6 × 1.4 in. (22.0 × 9.1 × 3.5 cm)
- **Weight:** 16.6 oz (472 g)
- **Plug style:** straight plug
- **Cord length:** 4 ft. (1.2 m)
- **Total outlets:** 8 (4 spaced)
- **Surge suppression:**
 - **Max. energy dissipation:** 600 joules
 - **Max. surge current:** 30,000 amps
- **EMI/RFI noise filtering:** Up to 32 dB
- **Load rating:** 15 amps
- **Line voltage:** 125V AC @ 60 Hz
- **Surge protection:** 3 lines (L-N / L-G / N-G)
- **Clamping voltage:** L-N = 400 volts, L-G / N-G = 500 volts
- UL-1449 certified

SAFETY INFORMATION

- RISK OF ELECTRIC SHOCK - Use only in dry locations and only indoors.
- DO NOT plug into another relocatable power tap.
- DO NOT “daisy chain” surge protectors.
- DO NOT use with any aquarium equipment.
- DO NOT use if correctly grounded outlets are not available.
- DO NOT install this device if there is not at least 30 feet (10 meters) or more of wire between the electrical outlet and electrical service panel.
- This device features internal protection that will disconnect the surge protective component at the end of its useful life, but will maintain power to the load – WHICH WILL BE UNPROTECTED. If you don't want your equipment at risk, follow the manufacturer's instructions for replacing the device.
- DO NOT use in any circumstance that would affect the operation or reliability of life support equipment, any medical applications, or patient care.

LEGAL NOTICES

FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

ONE-YEAR LIMITED WARRANTY

Visit www.insigniaproducts.com for details.

CONTACT INSIGNIA

For customer support, call 1-877-467-4289 (U.S. and Canada) or 01-800-926-3000 (Mexico)
www.insigniaproducts.com

INSIGNIA is a trademark of Best Buy and its affiliated companies
Distributed by Best Buy Purchasing, LLC
7601 Penn Ave South, Richfield, MN 55423 U.S.A.
©2018 Best Buy. All rights reserved.
Made in China

