


### Package Contents:




### Connecting Your System

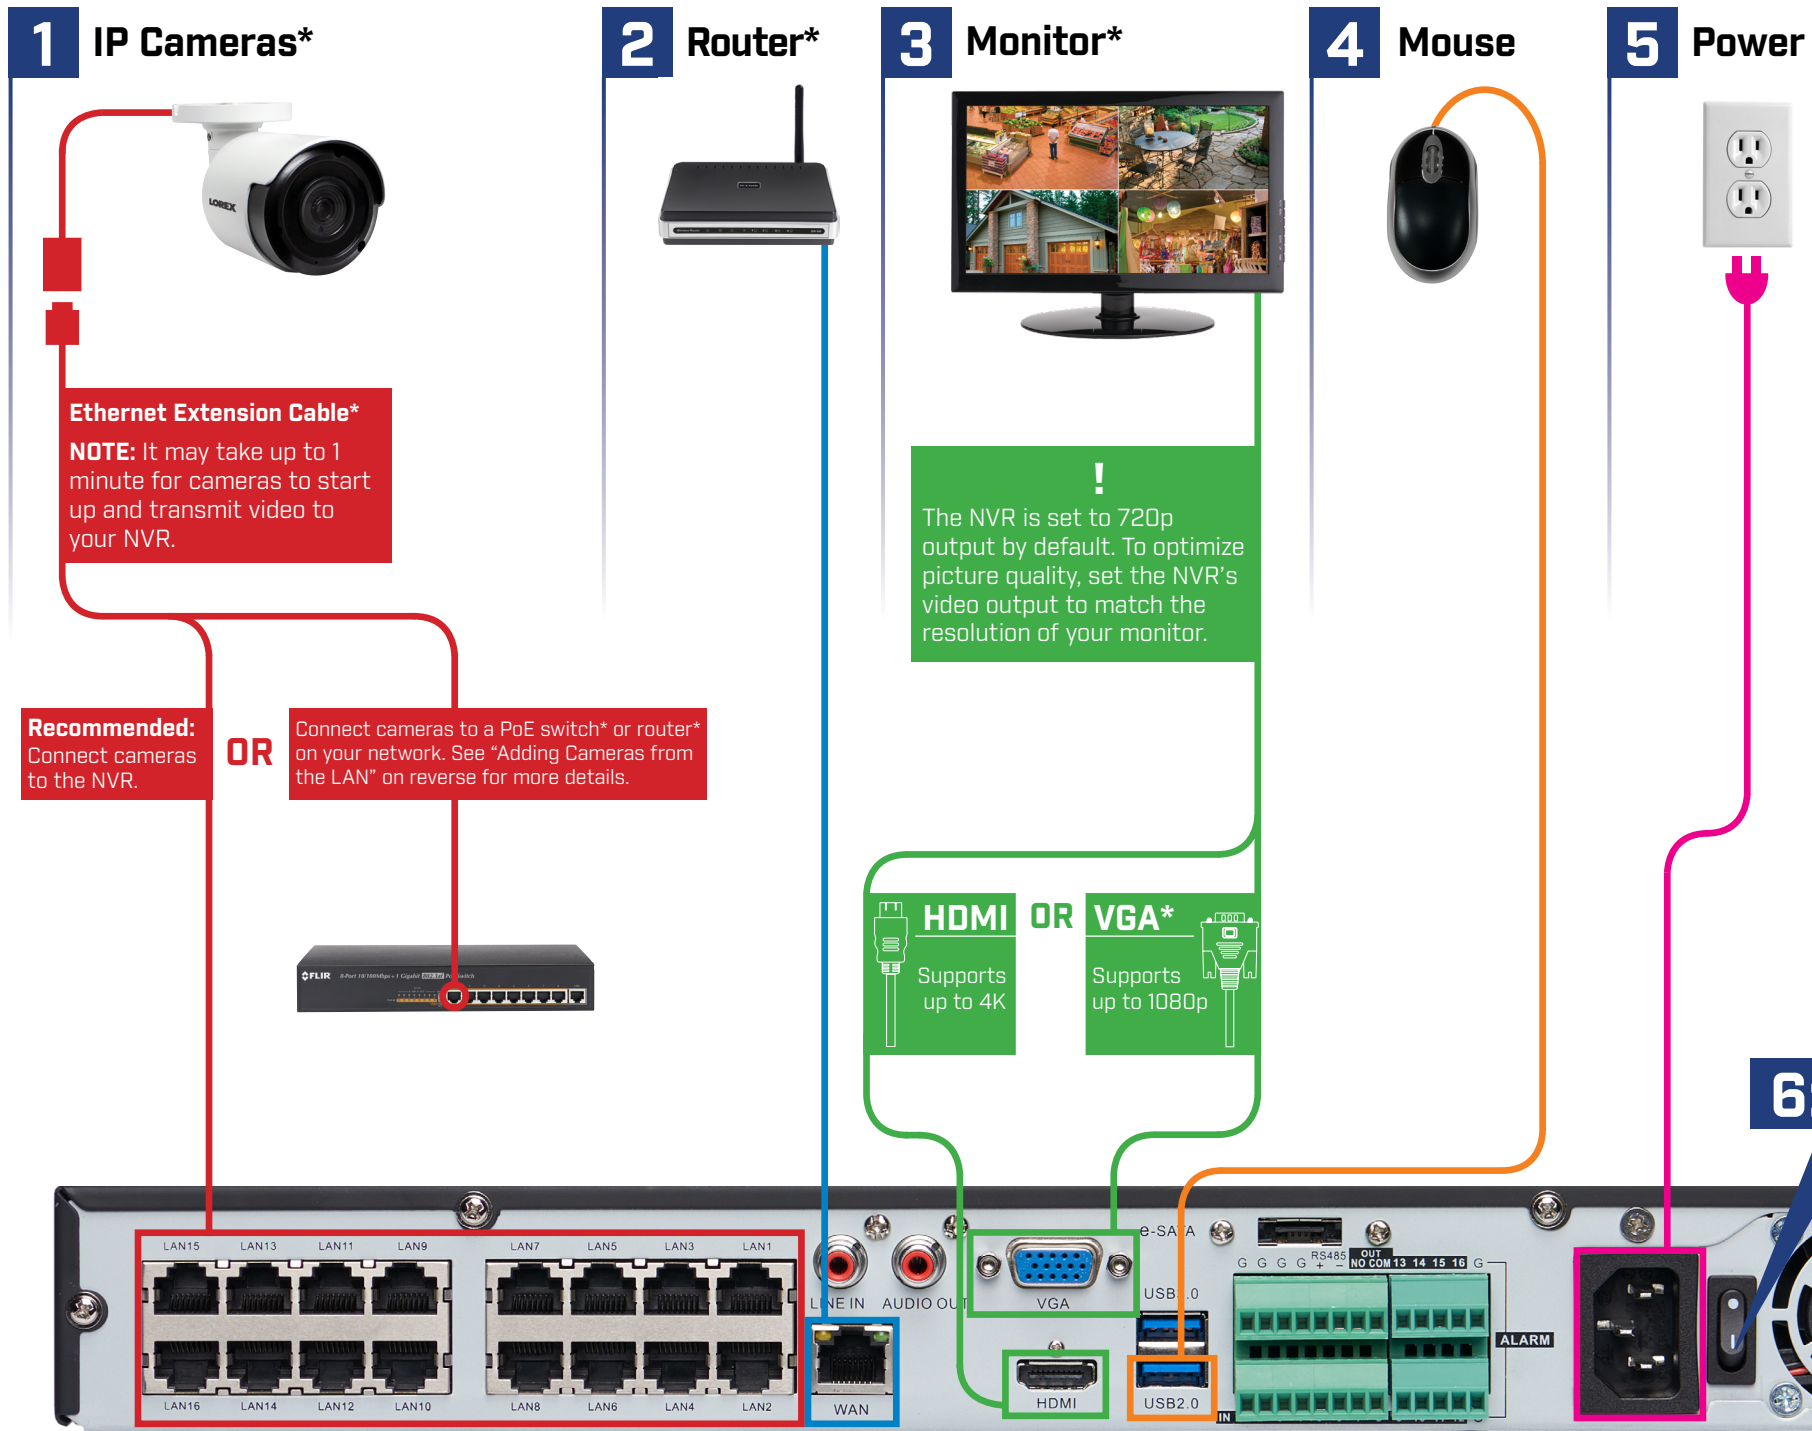

### Need Help?

Visit us online for up-to-date software and complete instruction manuals



- 1 Visit [lorextechnology.com](http://lorextechnology.com)
- 2 Search for the model number of your product
- 3 Click on your product in the search results
- 4 Click on the **Downloads** tab

16/32 channel configuration shown. 8 channel units will have the respective number of video inputs. For camera compatibility information, visit [lorextechnology.com/compatibility](http://lorextechnology.com/compatibility)

\* Not included / sold separately.

## Using the Mouse



### 1. LEFT-CLICK:

- **During split-screen display mode:** Double-click an individual channel to view it in full-screen. Double-click again to return to the split-screen display mode.
- **While navigating menus:** Click to open a menu option.

### 2. RIGHT-CLICK:

- **During live view:** Right-click anywhere on the screen to open the Quick Menu.
- **While navigating menus:** Right-click to exit menus.

### 3. SCROLL WHEEL:

- **While navigating menus:** Scroll to move up / down through the menu content.
- **During live view:** Hover over the volume control wheel and scroll to turn system volume up / down.

**NOTE:** In live view, hover the mouse cursor over the top of the screen to open the Navigation Bar. Move the mouse cursor away from the top of the screen to close the Navigation Bar.

## Using the Quick Menu

Right-click to open the Quick Menu.

- |                |                                    |
|----------------|------------------------------------|
| Main Menu      | Open Main Menu                     |
| Multi View     | Select camera / live display view  |
| Last Screen    | View the previous camera or page   |
| Next Screen    | View the next camera or page       |
| Stream Switch  | Set video stream                   |
| Preview Policy | Set video quality                  |
| Start SEQ      | Start/stop sequence mode           |
| Playback       | Search and play back recordings    |
| PTZ            | Control PTZ cameras (not included) |




## NVR Setup Wizard

When you power up the NVR for the first time, you will be asked to create a new, secure password for the system before using the Setup Wizard:


1. Log in using the system user name (default: **admin**) and password (default: **00000000**).
2. Enter a new, secure 8-15 character password, which will be used to access the system from now on.

**PASSWORD:**

3. Log in using your new, secure password to launch the Setup Wizard. Click **Next** to begin.
4. Click the arrow keys to select a language for the on-screen display. Click **Next** to confirm.
5. Click the arrow keys to select your region. Click **Next** to confirm.



6. Enter the date and time:

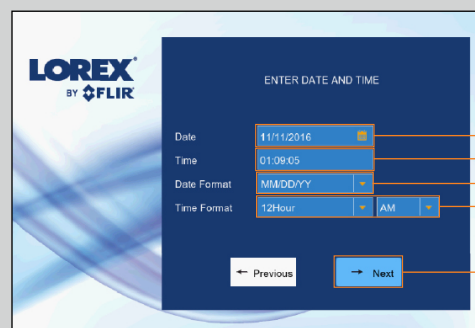

- Click to select the correct date from the calendar.
- Click to enter time using the on-screen keyboard.
- Select a date format from the dropdown.
- Select a time format from the dropdown. For **12Hour** format, select either **AM** or **PM** from the second dropdown.
- Click **Next** to confirm.

7. Review the information you have set for the NVR. To confirm, click **Accept**.

## System Information

To quickly open a window that displays vital system information such as device ID, firmware version, and IP address:


- From live view, click at the bottom of the screen.

OR

- Press on the included remote control.

## Playback and Search

1. From live view, right-click and then click **Playback**.
2. Log in using the system user name (default: **admin**) and your new, secure password you recorded in the section 'NVR Setup Wizard'.
3. Use the calendar on the left-side of the screen to select the date to playback.
4. Check off the channels you would like to search for recordings from on the left-side of the screen.
5. Click inside the video bar to select the playback time and press to begin playback.

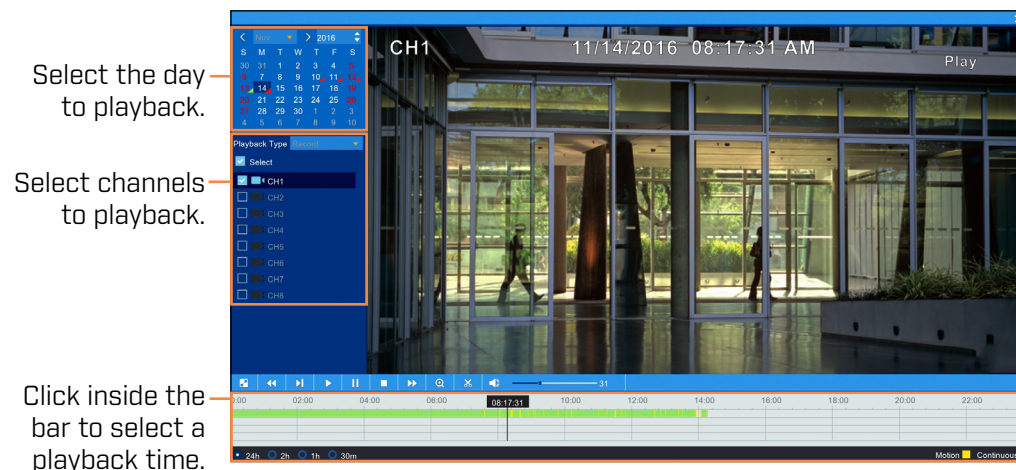


## Adding Cameras from the LAN

Follow the steps below to add cameras that are not directly connected to the Power over Ethernet (PoE) ports on the back of the NVR.

**NOTE:** Please visit [lorextechnology.com/compatibility](http://lorextechnology.com/compatibility) for a list of compatible Lorex IP cameras.

1. Connect the camera to a router or switch on the same network as the NVR.
2. From live view, hover over a blank channel. Click in the center of the channel to add an IP camera from the LAN.



**NOTE:** If prompted, enter the system user name (default: **admin**) and your new, secure password recorded in the section 'NVR Setup Wizard'.

3. The Quick Add menu opens and scans the network for compatible cameras.
4. Click the camera you would like to add, then click **Add**.

