


Ultimate 2.4G wireless Controller


English

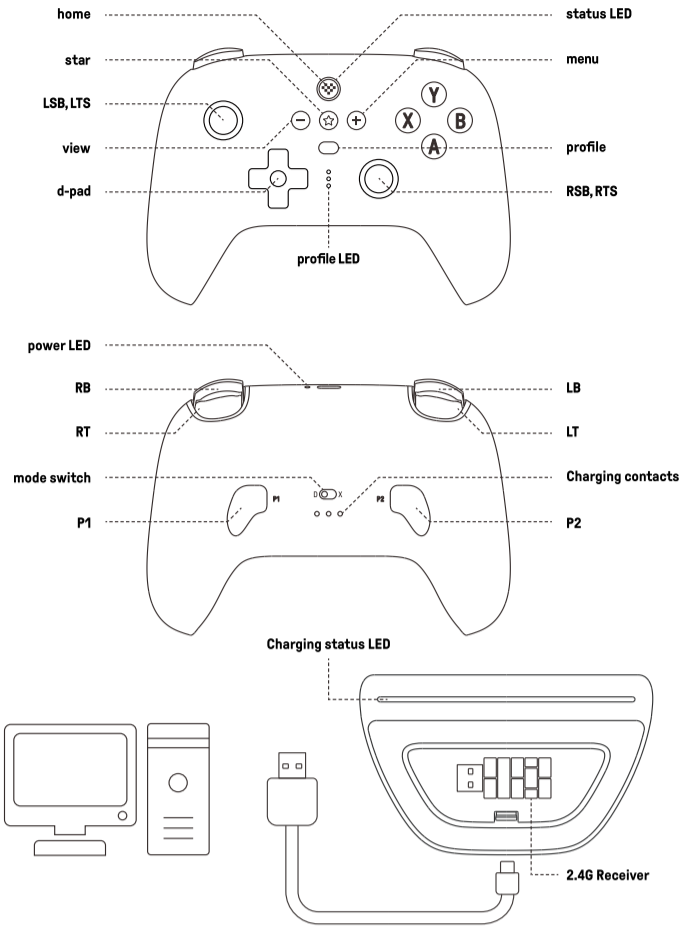

- * press **home button** to turn on the controller.
- * hold **home button** for 3 seconds to turn off the controller.
- * hold **home button** for 8 seconds to force the controller off.

猎户座 2.4G 无线手柄

中文

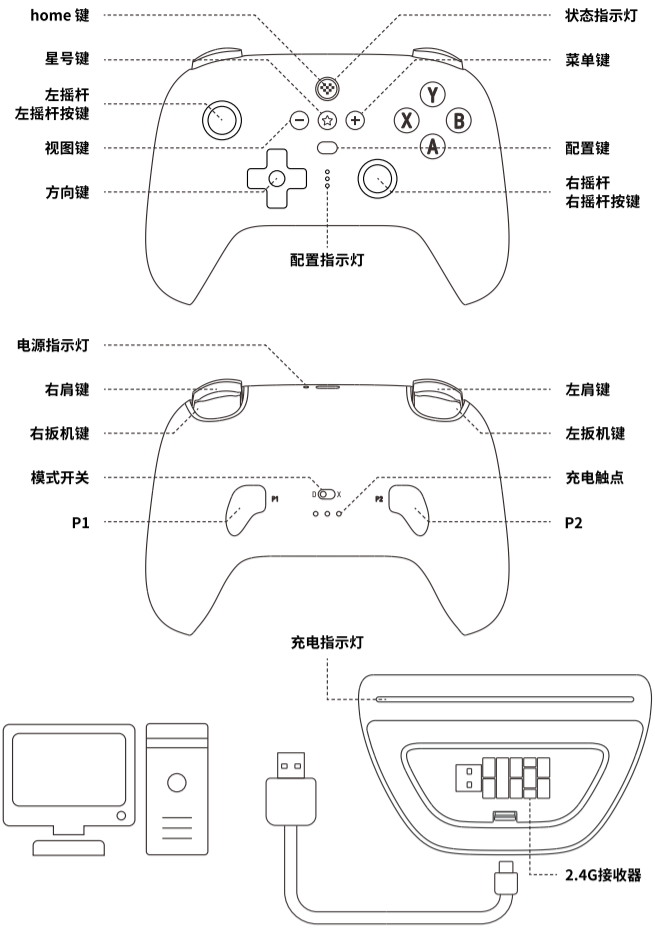

- * 开机:按下 **home 键**。
- * 关机:按住 **home 键** 3 秒。
- * 强制关机:按住 **home 键** 8 秒。

Windows



- * required system: Windows 10 (1903) or above.

wireless connection

1. connect the 2.4g receiver to the USB port of your Windows device.
2. turn the **mode switch** to **X**.
3. press **home button** to turn on the controller, wait till the controller is successfully recognized by your Windows device to play.

wired connection

1. turn the **mode switch** to **X**.
2. connect the controller to your Windows device via USB cable, wait till the controller is successfully recognized by your Windows device to play.

Android



- * required system: Android 9.00 or above.
- * OTG support is required on your Android device, please contact your manufacturer for more information.
- * hold the **profile button** for 5 seconds to switch to 2.4g/Bluetooth mode after turn on the controller, the mode will be saved after the mode change.(The controller vibrates once when change to BT mode, twice when change to 2.4g mode)

wireless connection

1. connect the 2.4g receiver to the USB port of your Android device.
2. turn the **mode switch** to **D**.
3. press **home button** to turn on the controller, wait till the controller is successfully recognized by your Android device to play.

Bluetooth connection

1. turn the **mode switch** to **D**.
2. press the **home button** to turn on the controller.
3. hold **star button** for 3 seconds to enter its pairing mode, LED starts to blink rapidly. (This is required for the very first time only)
4. go to your **Android device's Bluetooth setting** and turn it on, pair with [8BitDo Ultimate wireless], LED becomes solid when connection is successful.

wired connection

1. turn the **mode switch** to **D**.
2. connect the controller to the USB port of your Android device, wait till the controller is successfully recognized by your Android device to play.

Apple®

- * required system: iOS 16.3, iPadOS® 16.3, tvOS® 16.3, macOS® 13.2 or above.
- * hold the **profile button** for 5 seconds to switch to the Bluetooth mode, the mode will be saved after the mode change.(The controller vibrates once when change to Bluetooth mode)

Apple®, iPadOS®, macOS®, and tvOS® are trademarks of Apple Inc., registered in the U.S. and other countries.

Bluetooth connection

1. turn the **mode switch** to **D**.
2. press **home button** to turn on the controller.
3. hold **star button** for 3 seconds to enter its pairing mode, LED starts to blink rapidly. (this is required for the very first time only)
4. go to your **Apple device's Bluetooth setting** and turn it on, pair with [8BitDo Ultimate wireless], LED becomes solid when connection is successful.

Wired Connection

- * USB wired connection is only available for macOS or iPadOS devices with USB-C ports.
- 1. turn the **mode switch** to **D**.
- 2. connect the controller to the USB port of your Apple device, wait till the controller is successfully recognized by your Apple device to play.

Turbo function



- * The supported buttons for turbo: **A, B, X, Y, LB, RB, L3, R3**.
- * The turbo settings will not be saved permanently and will revert to default settings after the controller is powered off or disconnected.
- * The turbo function is not available when connected to Switch.

Turbo Mode

1. Turn on: Hold the button you would like to assign the turbo functionality, then press the **Star Button** to enable the Turbo Mode; **status indicator** will blink rapidly.
2. Turn off: Hold the button you would like to deactivate the turbo functionality, then press the **Star Button** to disable the Turbo Mode; **status indicator** will turn off.

Auto Turbo Mode

1. Turn on: Hold the button you would like to assign the turbo functionality, then press the **Star Button** twice to enable the Auto Turbo Mode; **status indicator** will blink rapidly.
2. Turn off: Hold the button you would like to deactivate the turbo functionality, then press the **Star Button** to disable the Auto Turbo Mode; **status indicator** will turn off.

Windows



- * 要求 Windows 设备系统版本为 Windows 10 (1903) 或更高版本。

无线连接

1. 将配备的 2.4G 接收器连接到 Windows 设备的 USB 端口。
2. 将手柄背后的 **模式开关** 移动到 **X** 位置。
3. 按下 **home 键** 开启手柄，等待系统识别完成后即可使用

有线连接

1. 将手柄背后的 **模式开关** 移动到 **X** 位置。
2. 使用 USB 线将手柄连接到 Windows 设备的 USB 端口，等待系统识别完成后即可使用。

Android



- * 要求 Android 设备系统版本为 9.0 或更高版本。
- * 需要设备支持 OTG 功能，请咨询设备制造商。
- * 开机后按住 **配置键** 5 秒可切换为无线 / 蓝牙连接，切换后会保存。(切换为蓝牙时振动 1 下，无线时振动 2 下)

无线连接

1. 将配备的 2.4G 接收器连接到 Android 设备的 USB 端口。
2. 将手柄背后的 **模式开关** 移动到 **D** 位置。
3. 按下 **home 键** 开启手柄，等待系统识别完成后即可使用。

蓝牙连接

1. 将手柄背后的 **模式开关** 移动到 **D** 位置。
2. 按下 **home 键** 开启手柄。
3. 按住 **星号键** 3 秒至 **状态指示灯** 快速闪烁，进入配对状态。(仅首次连接时需要配对)
4. 打开 Android 设备蓝牙，搜索 8BitDo Ultimate wireless 手柄连接，连接完成后 **状态指示灯** 常亮。

有线连接

1. 将手柄背后的 **模式开关** 移动到 **D** 位置。
2. 使用 USB 线将手柄连接到 Android 设备的 USB 端口，等待系统识别完成后即可使用。

Apple

- * 要求 iOS 16.3, iPadOS 16.3, tvOS 16.3, macOS 13.2 或更高版本。
- * 开机后按住 **配置键** 5 秒可切换为蓝牙连接，切换后会保存。(切换为蓝牙时振动 1 下)

蓝牙连接

1. 将手柄背后的 模式开关 移动到 **D** 位置。
2. 按下 **home 键** 开启手柄。
3. 按住 **星号键** 3 秒至 **状态指示灯** 快速闪烁，进入配对状态。(仅首次连接时需要配对)
4. 打开 Apple 设备蓝牙，搜索 8BitDo Ultimate wireless 手柄连接，连接完成后 **状态指示灯** 常亮。

有线连接

- * 仅 macOS 和配备 USB-C 端口的 iPadOS 设备支持有线连接。
- 1. 将手柄背后的 **模式开关** 移动到 **D** 位置。
- 2. 使用 USB 线将手柄连接到 Apple 设备的 USB 端口，等待系统识别完成后即可使用。

连发功能



- * 支持连发的功能键: **A, B, X, Y, LB, RB, L3, R3**。
- * 连发功能不会保存，关机或断开连接后恢复默认。
- * 连接 Switch 时不可用。

连发

1. 按住功能键，再按下 **星号键** 可开启连发，**状态指示灯** 快速闪烁。
2. 按住功能键，再按下 **星号键** 可关闭连发，**状态指示灯** 熄灭。

自动连发

1. 按住功能键，再按 2 下 **星号键** 可开启自动连发，**状态指示灯** 快速闪烁。
2. 按住功能键，再按下 **星号键** 可关闭自动连发，**状态指示灯** 熄灭。

Battery



13 hours of play time with a 480mAh built-in battery pack, rechargeable with 2 hours charging time.

controller status –		LED indicator –
low battery	→	red LED blinks
battery charging	→	red LED stays solid
battery fully charged	→	red LED turns off
charging dock status –		LED indicator –
battery charging	→	white LED stays solid
battery fully charged	→	white LED turns off

- * charging time with the controller on dock is the same as charging via USB cable.

Safety Warnings



- Please always use batteries, chargers, and accessories provided by the manufacturer.
- The manufacturer is not liable for any safety issues arising from the use of non-manufacturer-approved accessories.
- Do not attempt to disassemble, modify, or repair the device yourself. Unauthorized actions may result in serious injury.
- Avoid crushing, disassembling, puncturing, or attempting to modify the device or its battery, as these actions can be dangerous.
- Any unauthorized changes or modifications to the device will void the manufacturer's warranty.

电源



- * 配备 480mAh 可充电式锂电池，可持续使用约 13 小时，充电时间约 2 小时。

手柄电源状态 –		电源指示灯状态 –
电量不足	→	红灯闪烁
正在充电	→	红灯常亮
充电完成	→	红灯熄灭
底座电源状态 –		充电指示灯状态 –
正在充电	→	白灯常亮
充电完成	→	白灯熄灭

- * 手柄置于底座的充电时长与 USB 充电一致。

安全警示



- * 请使用制造商的电池、充电器、配件。
- * 在用户使用第三方的配件时，制造商不能对用户的安全负责。
- * 请勿自行拆卸、改装或修理设备。
- * 请勿挤压、拆解、刺穿或尝试改装设备及电池。
- * 对设备的任意变动或改装，将导致制造商对设备不予保修。

Ultimate Software

- * press **profile button** to switch between 3 custom profiles. The profile indicator will not light up when using the default setting.
- * it gives you elite control over every piece of your controller: customize button mapping, adjust stick & trigger sensitivity, vibration control and create macros with any button combination. Please visit support.8bitdo.com for the application.

自定义配置

- * 配置后可按下 **配置键** 切换不同的配置，默认无配置。
- * 请访问 app.8bitdo.cn 获取精英软件，可对手柄按键映射、摇杆灵敏度、扳机键灵敏度、振动强度以及宏等功能进行自定义配置。

Support



- * please visit support.8bitdo.com for further information & additional support.



技术支持



- * 请访问 support.8bitdo.cn 了解详细信息。

