

## KS 7793 D

PerfectCool refrigerator

with PerfectFresh Active, FlexiLight 2.0, and FlexiTray for maximum convenience.



- Fresh 5x longer with active humidification – PerfectFresh Active
- Individually adjustable glass shelf lighting with FlexiLight 2.0
- Uniform temperature distribution inside the appliance – DynaCool
- Door shelf heights can be adjusted individually

EAN: 4002516424697 / Material number: 11749850 /  
Old Material Number: 3677930USA

Appliance category	
Fridge	•
<b>Design</b>	
Built-in	•
Built-in integrated	•
Door hinge side	right
Convertible hinging	•
Can be installed side-by-side	•
<b>Design</b>	
Fan lighting	•
Freshness system lighting	•
<b>User convenience</b>	
Fridge zone lighting	FlexiLight 2.0
Networking with Miele@home	•
Freshness system	PerfectFresh Active
Active humidification in top drawer	•
Fine adjustment inner door	•
ComfortClean	•
DynaCool	•
Party mode	•
Holiday mode	•
ComfortSize	•
SoftClose door closing damper	•
SelfClose	•
<b>Control</b>	
Electronic temperature display and control	FreshTouch
Fridge compartment can be switched off	No
Independent temperature control of fridge and freezer compartments	No
SuperCool	•
No. of temperature zones	2
Sabbath mode	•
<b>Fridge/fridge zone</b>	
No. of shelves	4
of which illuminated	3
Chrome-plated metal bottle rack	•
No. of PerfectFresh drawers	3
Dry back wall	Clean Touch Steel
CompactCase	•
FlexiTray	•
Number of door racks for cans	3
Door rack for bottles	2
Door shelves	5
<b>Safety</b>	
Lock function	•
Acoustic door alarm	•
Optical door alarm	•

## KS 7793 D

PerfectCool refrigerator

with PerfectFresh Active, FlexiLight 2.0, and FlexiTray for maximum convenience.



EAN: 4002516424697 / Material number: 11749850 /  
Old Material Number: 36779301USA


### Technical data

Niche width in inches (mm), min.	22 1/8 (560)
Niche width in inches (mm), max.	22 1/2 (570)
Niche height in inches (mm), min.	69 7/8 (1772)
Niche height in inches (mm), max.	70 1/2 (1788)
Niche depth in in.(mm)	21 3/4 (550)
Appliance width in in.(mm)	22 1/8 (559)
Appliance height in in.(mm)	69 3/4 (1770)
Appliance depth in in.(mm)	21 1/2 (546)
Weight in lbs.(kg)	159 (72.0)
Type of mounting	Fixed door
Maximum fridge compartment door front weight in lbs. (kg)	58 (26)
Climate range	SN-T
including PerfectFresh zone in l	3.46 (98)
Total usable capacity in cu. ft. (l)	10.45 (296)
Current consumption in milliampere (mA)	2300
Voltage in V	115
Fuse rating in A	10
Number of phases	1
Frequency in Hz	60
Wire length in ft (m)	7 (2.2)
Replacing bulbs	Customer Service
<b>Standard accessories</b>	
Egg rack	•
PerfectFresh organization box	•

## KS 7793 D


PerfectCool refrigerator

with PerfectFresh Active, FlexiLight 2.0, and FlexiTray for maximum convenience.

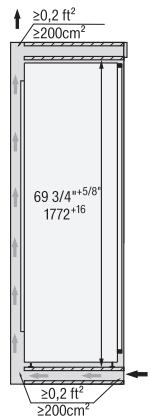

KS7793D, FNS7794E, side view (US)

[mm]

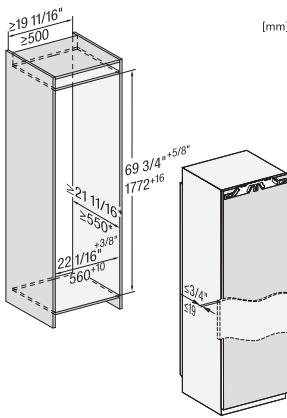

KS7793D, FNS7794E, built-in (installation (US))

\*The declared energy consumption was calculated in a 560 mm deep niche. The appliance is fully functional in a 550 mm niche but the energy consumption will be slightly higher.