

## QUICK SETUP GUIDE

5-Outlet Surge  
Protector Wall Tap

NS-HXWT26

## PACKAGE CONTENTS


- 5-outlet surge protector wall tap
- Quick Setup Guide

Before using your new product, please read these instructions to prevent any damage.

## FEATURES

- Five wide-spaced AC outlets power multiple devices at the same time
- One USB-C PD port (30W) and one USB-A port (12W), or 20W (5V, 4A when you use two ports) total when used together to charge your smartphones, tablets, and more
- Surge protection guards your device against unexpected power surges
- LED indicator lets you know when your devices are protected

## OVERVIEW

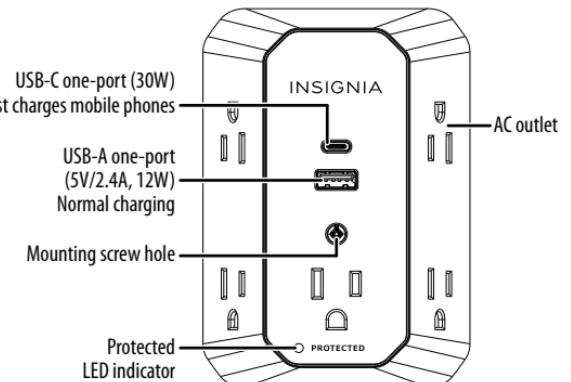


## USING YOUR SURGE PROTECTOR

- Plug your wall tap into a wall outlet. You can also mount your wall tap onto a wall outlet using the screw hole.
- The Protected LED lights when surge protection is working. If the indicator no longer lights, the surge protector has protected your device from a power surge. Replace your wall tap.


## USB-C one-port charging

The USB-C port is more suitable for tablets and smartphones. It provides up to 30W of power when used alone.

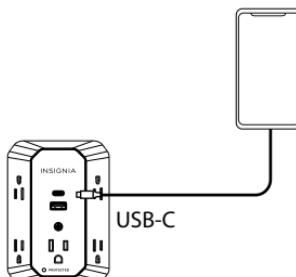


## USB-A one-port charging

The USB-A port is suitable for smartphones, smartwatches, and earbuds. It provides up to 12W of power when used alone.

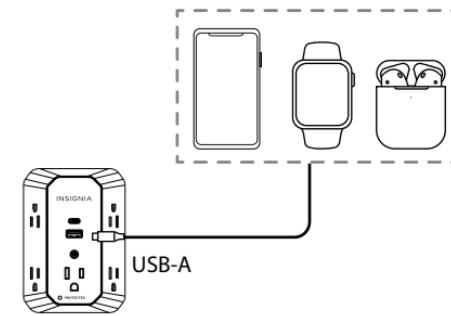

## Two-ports charging

When both ports are used together, they share 20W max (5V, 4A).

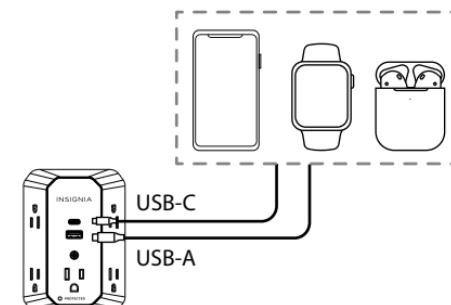

## SPECIFICATIONS

- **Dimensions (HxWxL) (not including plug):** 5 x 3.5 x 1.6 in. (12.6 x 8.9 x 4.1 cm)
- **Load rating:** 15 amps
- **Line voltage:** 120V AC ~ 60Hz
- **Surge protection:** 3 lines (L-N / L-G / N-G)
- **Maximum surge current:** 72,000 amps
- **Maximum energy dissipation:** 1,080 joules
- **EMI/RFI noise filtering:** Up to 40 dB
- **Surge protector certification:** UL-1449 certified
- **USB output:** Use One Port:

### USB-C: PD 30W

DC 5V/3A, 9V/3A, 15V/2A, 20V/1.5A  
(PPS) 5-11V/3A, 5-16V/2A, 30W MAX

### USB-A: 5V/2.4A, 12W Max

### Use Multi Ports:

Total 5V/4A (shared)

3A Max for USB-C and 2.4A Max for USB-A

## TROUBLESHOOTING

- If your surge protector turns off and the LED indicator is off, it means the surge protection circuitry has reached the end of its service life and the wall tap needs to be replaced.
- If the wall outlet which your surge protector plugs into is loose, or does not hold the product weight well, use the screw-mount option.

## SAFETY INFORMATION/CAUTION

### READ ALL INSTRUCTIONS BEFORE USING.

- **RISK OF ELECTRIC SHOCK** – Use only in dry locations and only indoors.
- **DO NOT** plug into another relocatable power tap or extension cord.
- **DO NOT** “daisy chain” surge protectors.
- **DO NOT** use with any aquarium equipment.
- **DO NOT** use if correctly grounded outlets are not available.
- This device features internal protection that will disconnect the surge protective component at the end of its useful life and Auto Shutdown this device. At this time, no output power will be provided to AC outlets and DC ports and device needs to be replaced.

## LEGAL NOTICES

### FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**Warning:** Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## ONE-YEAR LIMITED WARRANTY

Visit [www.insigniaproducts.com](http://www.insigniaproducts.com) for details.

## CONTACT INSIGNIA:

For customer service, call  
1-877-467-4289 (U.S. and Canada)  
[www.insigniaproducts.com](http://www.insigniaproducts.com)

INSIGNIA is a trademark of Best Buy and its affiliated companies  
Distributed by Best Buy Purchasing, LLC  
7601 Penn Ave South, Richfield, MN 55423 U.S.A.  
©2025 Best Buy. All rights reserved.