


INSTALLATION

Accessory #	Description
ULASHP15SOLID	15" (38cm) Solid Door
ULASHP15FRAME	15" (38cm) Frame Door
ULASHP18SOLID	18" (45cm) Solid Door
ULASHP18FRAME	18" (45cm) Frame Door
ULASHP24SOLID	24" (60cm) Solid Door
ULASHP24FRAME	24" (60cm) Frame Door
ULASHP24DWR	24" (60cm) Drawer
VDPUI15DSS	15" (38cm) Solid Door
VDPUI15GSS	15" (38cm) Frame Door
VDPUI24DSS	24" (60cm) Solid Door
VDPUI24GSS	24" (60cm) Frame Door
VDPUDR124SS	24" (60cm) Drawer
VDPUI318DSS	18" (45cm) Solid Door
VDPUI318GSS	18" (45cm) Frame Door
VDPUI324DSS	24" (60cm) Solid Door
VDPUI324GSS	24" (60cm) Frame Door
VDPUDR324SS	24" (60cm) Drawer

1. Open door/drawer completely.


2. Starting at corner, pull gasket away from door/drawer and remove.



3. Upon removal, lay gasket down on a flat surface.

Certain frame panels include a pre-installed black insert. Remove the protective foil on the top and bottom sides if applicable.

4. Align the pilot holes by placing the panel on the top corner edge of the door/drawer.

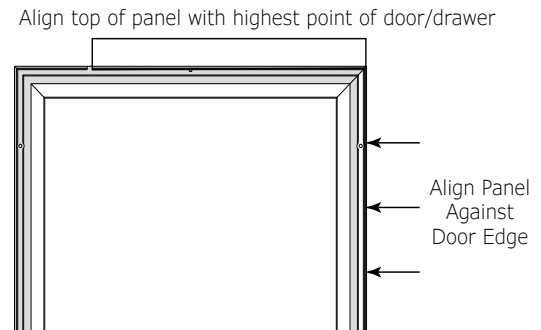

5. Have a second person hold the panel in place or secure with a clamp.

6. Locate the 6 #8-321-1/4 (32 mm) screws provided with your panel. (Drawer panels use only 4 screws per panel)

7. Using a #2 Phillips screwdriver, place 1 screw in each of the 6 pilot holes and secure. Do not over-tighten.

8. Reinstall gasket beginning at the corners.

