




EXPLORER10

POWER BANK & HAND WARMER

V1

PRODUCT DIAGRAM

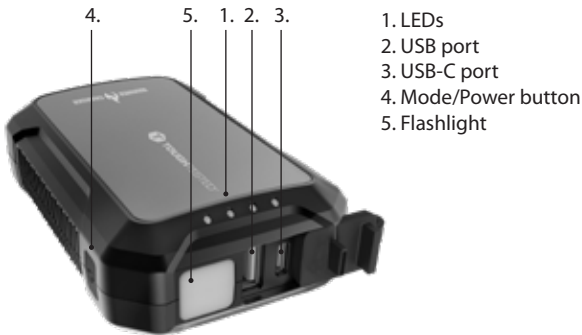

CHARGING THE POWERBANK

- Before first use fully charge the powerbank
- Connect the included USB-C cable into the USB-C port on the powerbank
- Connect the other end of the cable to a USB power source such as a wall or car charger
- The LEDs on the front of the powerbank will light up while it is being recharged
- When all 4 LEDs are lit the powerbank is fully charged

CHARGING A SMARTPHONE

- Connect a USB cable between the powerbank and your device
 - Press the power button to turn the powerbank on, the LEDs will show as white
 - The LEDs will stay on while your phone is charging
 - When your phone is charged the LEDs will turn off
- Note:** You can charge a Smartphone or other USB device while the powerbank is being recharged.

CHECKING THE BATTERY LEVEL OF THE POWERBANK

- Press the power button, the LEDs will turn on to indicate the charge level
- One LED on < 25%
Two LEDs on >25% < 50%
Three LEDs on > 50% < 75%
Four LEDs on > 75% to 100%
- The LEDs will automatically turn off after 8 seconds when there is no device being charged

USING THE HAND WARMER FUNCTION

- Press and hold the mode button for 2 seconds to turn heating mode on or off.
- The LEDs will be orange in heating mode
- Short press the button to go to the next heat setting
Low -> Med low -> Med high -> High

USING THE HAND WARMER FUNCTION *(continued)*

Temperature levels and operating time on a fully charged battery

Levels	F	C	Times (hrs)
Low	95	35	24
Med low	104	40	16
Med high	113	45	11
High	122	50	8

Important note: While in handwarmer mode, if you connect a cable to charge your device the handwarmer function will stop and the device charging will begin.

FLASHLIGHT FUNCTION

Quick press the Mode/Power button 2x to turn the flashlight on or off.

PRODUCT SPECIFICATIONS

Battery type:	Li-Polymer
Battery capacity:	10000mAh (37Wh)
Input (USB-C PD port):	5V/3A, 9V/2A, 12V/1.5A
Output (USB-C PD port):	5V/3A, 9V/2A, 12V/1.67A
LED Flashlight output:	1W
Dimensions:	68 x 107.5 x 34.5mm/2.7 x 4.2 x 1.4 inches
Weight:	250g/8.8oz

SAFETY INSTRUCTIONS

- Do not place near a heat source like a radiator or other heat producing devices
- Do not place in direct sunlight or in places with high temperature
- Do not expose the device to water, moisture, or high humidity
- Do not throw batteries in the garbage, contact your local recycling center for proper disposal
- Do not open the device, there are no user serviceable parts
- Store in a cool dry place when not in use

FCC STATEMENT: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help. This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

1. this device may not cause harmful interference, and
2. this device must accept any interference received, including interference that may cause undesired operation.
CAUTION: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

ICES
This Class B digital apparatus complies with Canadian ICES-003.

LIMITED WARRANTY

Thank you for purchasing a ToughTested® product from Alliance Brands, LLC.

We want you to enjoy this product without any problems. However, in the unlikely event that it malfunctions, we will either repair or replace it as part of the product's limited 5 year warranty.

At the first sign of trouble and before returning the product, we encourage you to contact ToughTested®.

If the product has malfunctioned during normal use, the responsibility of ToughTested® is limited solely to the repair or replacement, at its option, of the product. This warranty does not extend to damage or failure that results from misuse, neglect, accidents, alteration, abuse, improper installation or maintenance. This warranty does not extend to equipment used with the product.

All brands represented herein are registered trademarks of their respective manufacturers. Design and specifications are subject to change without notice.

All rights reserved. ToughTested is a registered trademark of Alliance Brands, LLC.
All other trade names are registered trademarks of the respective manufactures listed

Alliance Brands, LLC. 21 Commerce Drive. Cranbury, N.J. 08512
support@alliancebrands.com
www.alliancebrands.com



EXPLORER10

BATTERIE EXTERNE & RÉCHAUFFEUR DE MAINS

V1

FRANÇAIS

UTILISATION DE LA FONCTION CHAUFFE-MAINS

- Appuyez sur le bouton d'alimentation pendant 2 secondes pour activer le mode chauffage
- Les LED seront orange en mode chauffage
- Appuyez brièvement sur le bouton pour passer au réglage de chaleur suivant
Faible -> Moyen faible -> Moyen fort -> Fort

Niveaux de température et durée de fonctionnement sur batterie entièrement chargée

Niveaux	F	C	Durées (heures)
Low	95	35	24
Med low	104	40	16
Med high	113	45	11
High	122	50	8


Note importante : En mode réchauffeur de mains, si vous connectez un câble pour charger votre appareil, la fonction de réchauffeur de mains s'arrêtera et la charge de l'appareil commencera.

FONCTION LAMPE DE POCHE

Appuyez rapidement 2 fois sur le bouton Mode/Alimentation pour allumer ou éteindre la lampe de poche.

FRANÇAIS

ILLUSTRATION DU PRODUIT

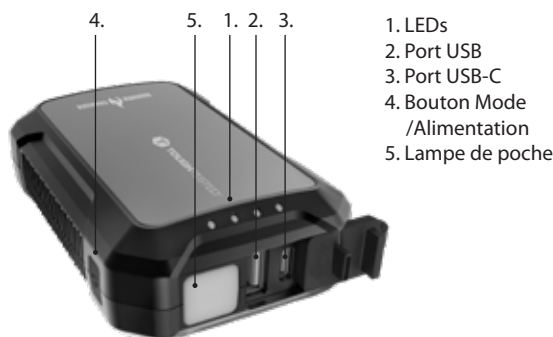

CHARGER LA BATTERIE EXTERNE

- Avant la première utilisation, chargez complètement la batterie externe
- Connectez le câble USB-C fourni dans le port USB-C de la batterie externe
- Branchez l'autre extrémité sur une source d'alimentation USB telle qu'un chargeur mural ou pour voiture
- Les témoins lumineux à l'avant de la batterie externe s'illumineront pendant la recharge
- Lorsque les quatre témoins lumineux resteront allumés, cela indiquera que la batterie externe est complètement chargée

FRANÇAIS

CARACTÉRISTIQUES DU PRODUIT

Type de batterie :	Li-Polymer
Capacité de la batterie :	10000mAh (37Wh)
Entrée (port USB-C PD) :	5V/3A, 9V/2A, 12V/1.5A
Sortie (port USB-C PD) :	5V/3A, 9V/2A, 12V/1.67A
Sortie de la lampe de poche à LED :	1W
Dimensions :	68 x 107.5 x 34.5mm/2.7 x 4.2 x 1.4 inches
Poids :	250g/8.8oz

SAFETY INSTRUCTIONS

- Ne pas placer près d'une source de chaleur comme un radiateur ou un autre appareil générant de la chaleur
- Ne pas exposer à la lumière directe du soleil ou dans des endroits à température élevée
- Ne pas exposer l'appareil à l'eau, à l'humidité et/ou à l'humidité élevée
- Ne pas jeter les piles aux ordures; communiquer avec le centre de recyclage local pour connaître la marche à suivre appropriée
- Ranger dans un endroit frais et sec lorsqu'il n'est pas utilisé

FRANÇAIS

CHARGEMENT D'UN TÉLÉPHONE INTELLIGENT

- Reliez la batterie externe à votre appareil au moyen d'un câble USB
- Appuyez sur le bouton d'alimentation pour allumer la batterie externe, les LED s'allumeront en blanc.
- Les témoins lumineux resteront allumés pendant que votre téléphone se chargera

Remarque : Vous pouvez charger un téléphone intelligent ou un autre appareil USB pendant que la batterie externe est en train de se recharger.

VÉRIFICATION DU NIVEAU DE CHARGE DE LA PILE DE LA BATTERIE EXTERNE

- Appuyez sur le bouton d'alimentation—les témoins lumineux s'allumeront pour indiquer le niveau de charge
- Un seul témoin allumé < 25%
deux témoins allumés >25% < 50%
trois témoins allumés > 50% < 75%
quatre témoins allumés > 75% to 100%
- Les témoins lumineux s'éteindront automatiquement après 8 secondes si aucun appareil n'est en cours de charge

FRANÇAIS

GARANTIE LIMITÉE

Merci d'avoir choisi un produit ToughTested® de Alliance Brands, LLC.

Nous voulons que vous profitiez de ce produit en n'ayant aucun problème. Cependant, dans le cas peu probable de mauvais fonctionnement, nous le réparerons ou le remplacerons dans le cadre de la garantie limitée de 5 ans du produit.

Au premier signe de mauvais fonctionnement et avant de retourner le produit, nous vous invitons à communiquer.

Si le produit devient défectueux pendant une utilisation normale, la responsabilité de ToughTested® se limitera à la réparation ou au remplacement, à son gré, du produit. Cette garantie ne s'applique pas aux dommages ou aux pannes résultant d'une mauvaise utilisation, d'une négligence, d'un accident, d'une modification, d'un abus, d'une mauvaise installation ou d'un entretien inadéquat. Cette garantie ne s'étend pas à l'équipement utilisés avec le produit.

Toutes les marques mentionnées aux présentes sont les marques de commerce déposées de leurs fabricants respectifs. Les caractéristiques techniques et de conception sont susceptibles d'être modifiées sans préavis.

Tous les droits sont réservés. ToughTested est une marque déposée de Alliance Brands, LLC.

Tous les autres noms commerciaux sont des marques déposées de leurs fabricants respectifs.

Alliance Brands, LLC. 21 Commerce Drive. Cranbury, N.J. 08512
support@alliancebrands.com
www.alliancebrands.com