



Before You Start:

- Make sure you have a router and high-speed Internet access (not included).
- Connect your NVR to your router using an Ethernet cable (see the Quick Connection Guide for details).
- Upgrade your NVR firmware and client software or mobile app to the latest versions.
- Please note that an upload speed of 3.5 Mbps is required for remote video streaming. Up to 3 devices may connect to the system at the same time.

1 Find Your Device ID

The **Device ID** is printed on a label on the top panel of the NVR.



Record your information below:

DEVICE ID: _____

2

Smartphone / Tablet Setup

- Install the free **Loxex Cirrus** app from the App Store or Google Play Store.
- Tap the **Loxex Cirrus** icon to open the app.
- Tap to open the menu. Tap **Devices**, then tap **Add**.
- Enter the following:




Device		Save
A	Login Type	Device ID
B	Device ID	Ink685df9268
C	Client Port	35000
D	User Name	admin
E	Password	*****

- Ensure **Device ID** is selected.
- Tap to scan the QR code on the top of your recorder using the camera on your mobile device.
- Ensure the **Client Port** reads **35000**.
- Enter the username (default: **admin**).
- Enter the secure password you recorded on the Quick Connection Guide.
- Tap **Save**.



- Live video from your security system will appear on the app. Double-tap one of the channels to see video from a single camera.

Live View Overview:

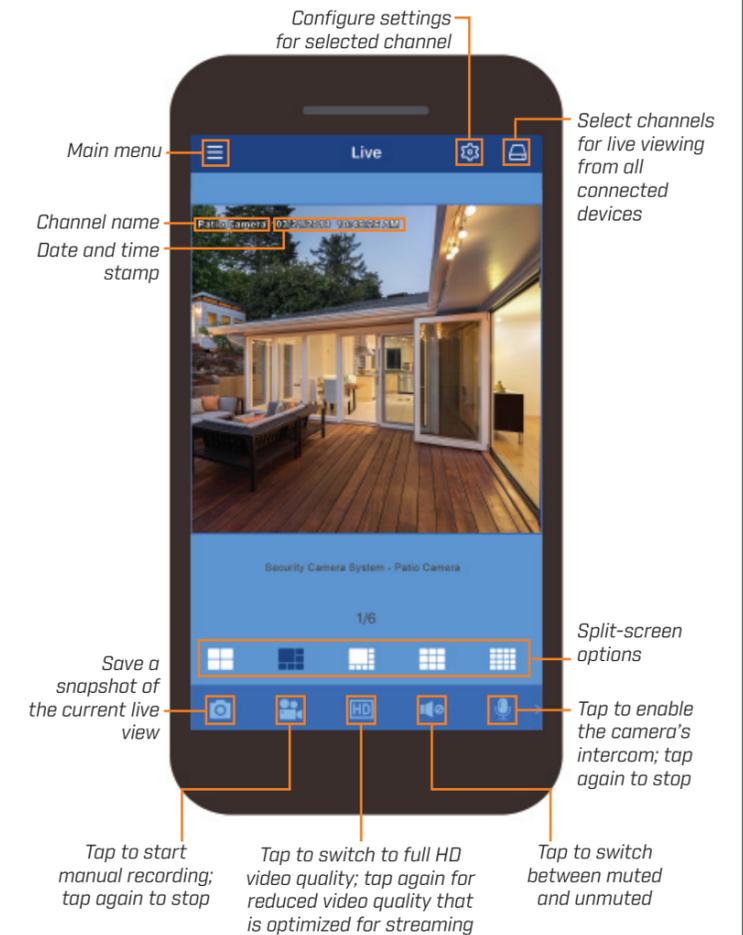

NOTE: For complete app instructions, see the Loxex Cirrus instruction manual on your product page at lorex.com

3


PC / Mac Setup

a Download and install the client software:

- **PC Users:** Download and install **Lorex Client 13 for PC** from lorex.com.
- **Mac Users:** Download and install **Lorex Client 13 for Mac** from lorex.com. Double-click to extract the software, then drag the software to **Applications**.

b Double-click the **Lorex Client 13 icon** () on the desktop or Applications list.


c Enter the following information:

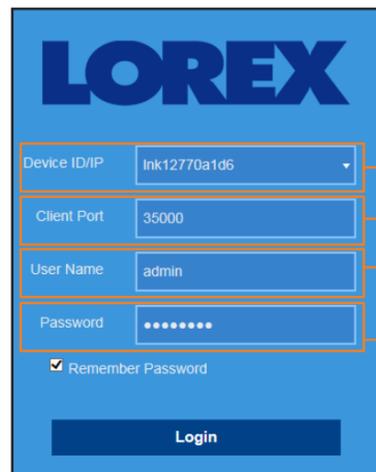

- Enter the NVR's Device ID recorded in section 1
- Enter the NVR's Client Port (default: **35000**)
- Enter the NVR's user name (default: **admin**)
- Enter the secure password you created for the NVR

d Click **Login**.

e All connected cameras are shown on screen in the Lorex Client 13 home screen.

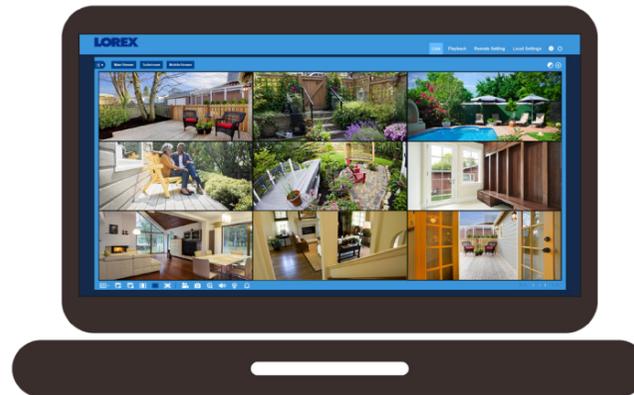

NOTE: For full instructions on how to use the Lorex Client 13 software for PC and Mac, see your NVR's instruction manual at lorex.com.

Troubleshooting

If you are having trouble connecting, try the following:

- Restart the NVR by disconnecting the power adapter, then reconnecting it.
- Ensure the NVR is connected to the router using an Ethernet cable and then restart the NVR.
- Double check the Username, Password, and Client Port.
- Ensure your NVR has the latest firmware.
- Ensure your mobile app is up-to-date.

Quick Reference

Default access information:

- Default user name: **admin**
- Default password: **00000000**

See the label on top of your NVR for your Device ID


Default system ports:

- HTTP Port: **80**
- Client Port: **35000**

If you have forgotten your password, contact Lorex technical support.

Need Help?

Visit us online for up-to-date software and complete instruction manuals

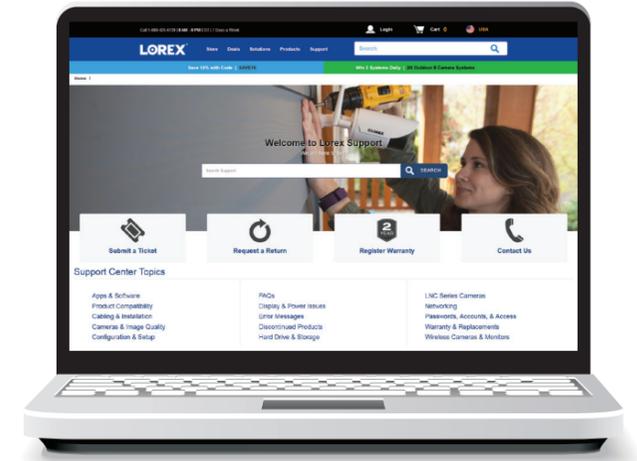

1 Visit lorex.com

2 Search for the model number of your product

3 Click on your product in the search results

4 Click on the **Downloads** tab

Copyright © 2018 Lorex Corporation
As our products are subject to continuous improvement, Lorex reserves the right to modify product design, specifications and prices, without notice and without incurring any obligation. E80E. All rights reserved.

Congratulations! You can now view video from your cameras on your PC or Mac.