

Package Contents:




HD DVR



Remote Control



Ethernet Cable



Quick Start Guides



USB Mouse



Power Cable



HDMI Cable

Connecting Your System

1 Cameras*



Extension Cable*

The extension cable must be a single stretch of cable between the DVR and camera. You cannot connect multiple extension cables to each other.

2 Monitor*



The DVR is set to 720p output by default. To optimize picture quality, set the DVR's video output to match the resolution of your monitor.

3 Router*



4 Mouse



5 Power



This system features automatic firmware upgrades for enhanced functionality. **It is required to upgrade your system to the latest firmware version.**

If a firmware upgrade is available:

1. After startup, a notification will appear asking you to upgrade the firmware. Click **OK** to upgrade.

2. The system will download and install the firmware upgrade. Wait for the firmware update to complete. The system may restart during the firmware upgrade process.

DO NOT power off or disconnect the power cable during firmware installation.



8 channel configuration shown. 4/16 channel units will have the respective number of video inputs. For camera compatibility information, visit lorextechnology.com/compatibility

* Not included / sold separately.

Using the Mouse

1. LEFT-CLICK:

- **During split-screen display mode:** Double-click an individual channel to view it in full-screen. Double-click again to return to the split-screen display mode.
- **While navigating menus:** Click to open a menu option.



2. RIGHT-CLICK:

- **During live view:** Right-click anywhere on the screen to open the Quick Menu.
- **While navigating menus:** Right-click to exit menus.

3. SCROLL WHEEL:

- **While navigating menus:** Scroll to move up / down through the menu content.
- **During live view:** Hover over the volume control wheel and scroll to turn system volume up / down.

NOTE: In live view, hover the mouse cursor over the top of the screen to open the Navigation Bar. Move the mouse cursor away from the top of the screen to close the Navigation Bar.

Using the Quick Menu

Right-click to open the Quick Menu.

	Main Menu	Open Main Menu
	Multi View	Select camera / live display view
	Last Screen	View the previous camera or page
	Next Screen	View the next camera or page
	Start SEQ	Start/stop sequence mode
	Playback	Search and play back recordings
	PTZ	Control PTZ cameras (not included)

DVR Setup Wizard

When you power up the DVR for the first time, you will be asked to create a new, secure password for the system before using the Setup Wizard:

1. Log in using the system user name (default: **admin**) and password (default: **00000000**).
2. Enter a new, secure 8-15 character password, which will be used to access the system from now on.

PASSWORD:

3. Log in using your new, secure password to launch the Setup Wizard. Click **Next** to begin.




4. Click the arrow keys to select a language for the on-screen display. Click **Next** to confirm.



5. Click the arrow keys to select your region. Click **Next** to confirm.




6. Enter the date and time:

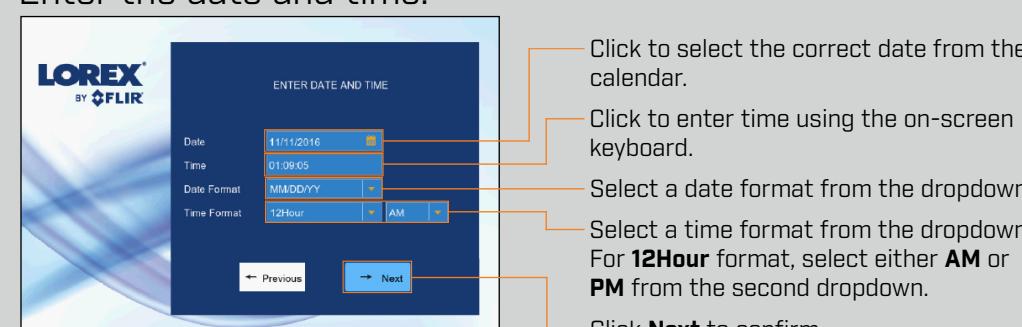

7. Review the information you have set for the DVR. To confirm, click **Accept**.

Playback and Search

1. From live view, right-click and then click **Playback**.
2. Log in using the system user name (default: **admin**) and your new, secure password you recorded in the section 'DVR Setup Wizard'.
3. Use the calendar on the left-side of the screen to select the date to playback.
4. Check off the channels you would like to search for recordings from on the left-side of the screen.
5. Click inside the video bar to select the playback time and press to begin playback.

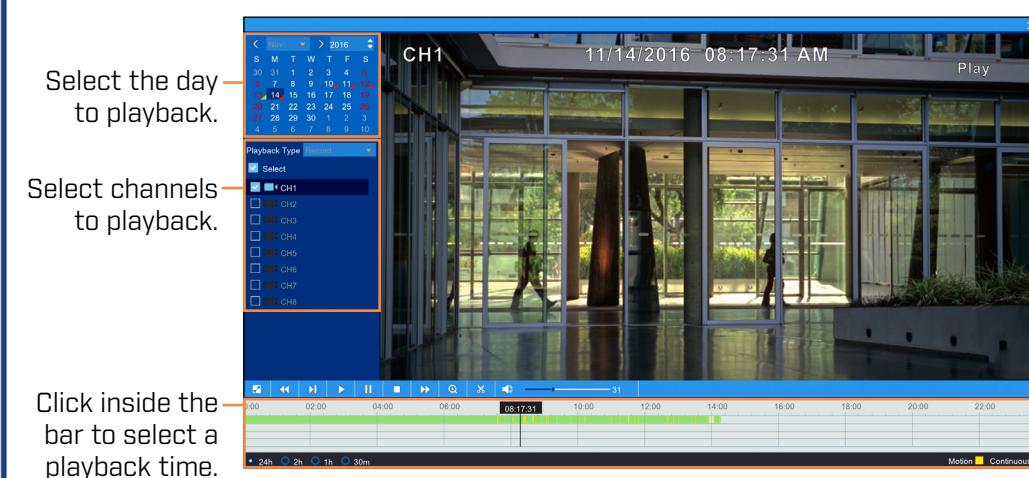

System Information

To quickly open a window that displays vital system information such as device ID, firmware version, and IP address:

- From live view, click at the bottom of the screen.

OR

- Press on the included remote control.

NOTE: If prompted, enter the system user name (default: **admin**) and your new, secure password recorded in the section 'DVR Setup Wizard'.