

SD1F-S1

2-in-1 Top Load Dishwasher

FOTILE
A BREATH OF FRESH ENGINEERING®



Main Features

2-in-1 Top Mount Design

Combining a kitchen dishwasher, and produce cleaner, the dishwasher solves more kitchen problems with **less space and energy**. Its design eliminates bending over to load and unload dishes, ideal for compact spaces.

High Pressure HydroJet Technology

Inspired by military-grade submarine cleaning technology, this advanced system generates **hundreds of billions of cavitation bubbles** to accelerate water flow, effectively removing stubborn bacteria and stains.

15 mins. Wash Cycle

The ultra-fast cleaning cycle completes in just **15 minutes**, perfect for quick and efficient dishwashing. **Eco Mode** conserves energy by using only 1.6 gallons per cycle, ideal for lightly to moderately soiled dishes.

Advanced Produce Washing

Dedicated modes ensure thorough **removal of pesticide residues** from fruits and vegetables, while powerful spray technology tackles stubborn seafood stains, simplifying the enjoyment of favorite dishes.

Odor-Free Storage

The triple drying system with PTC hot air ensures thorough drying and prevents secondary contamination. This is followed by automatic air circulation that keeps items clean and **odor-free for up to 96 hours**.



SD1F-S1

2-in-1 Top Load Dishwasher

FOTILE
A BREATH OF FRESH ENGINEERING®

Specifications



Style and Design

Tub Material	Stainless Steel
Material of Washing Basket	Nylon Coating
Operation Panel	Micro-pressure Waterproof Touchscreen
Place Setting	4 Sets
Accommodates Plates Up to	10 inch
Variable Dish Rack	Yes
PTC Hot Air Drying	Yes
Hidden Heating Plate	Yes
Number of Spray Arms	1
Dishwasher Air Gap Applicable	Yes
Protections	Child Lock, Water Leak Protection

Performance

Washing Mode	Dish Washing				Produce Washing		
	Delicate	Normal	Intensive	ECO	Delicate	Normal	Intensive
Highest Washing Temp.(°F)	140	140	167	126	Room Temperature		
Washing Time(min)	15	60	80	180	7	12	15
Water Consumption(gal/cycle)	1.85	2.0	3.0	1.6	4.2*	5.2*	5.8*
Number of Wash Cycles	3	3	5	3	1	2	3

Technical Specs

Wattage / Current	1500W / 13A
Voltage / Frequency	120V / 60Hz
Water Pressure Range	20.3—145.04 psi
Noise Level	53.5dB

Warranty Summary


Labor	2 Years
Parts	5 Years (Limited)
Motor	Lifetime (Limited)

*Water consumption for produce washing is shown as a medium load. Water consumption for a full load and a smaller load may vary.
Produce Washing Delicate L:4.0 M:4.2 H:4.5 | Normal L:4.8 M:5.2 H:5.5 | Intensive L:5.4 M:5.8 H:6.2 (Unit: gal./cycle)


SD1F-S1

2-in-1 Top Load Dishwasher


Installation Dimensions (Unit: inch)

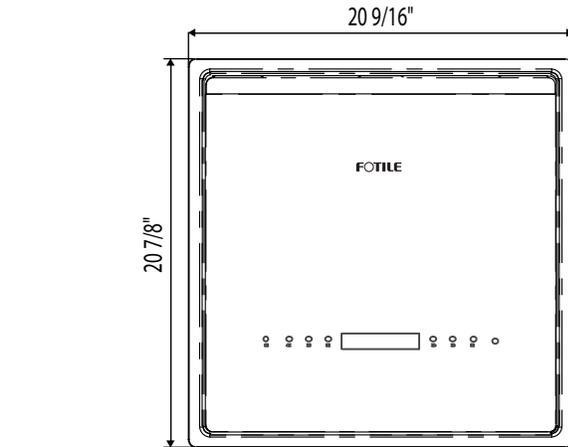

(Top View)

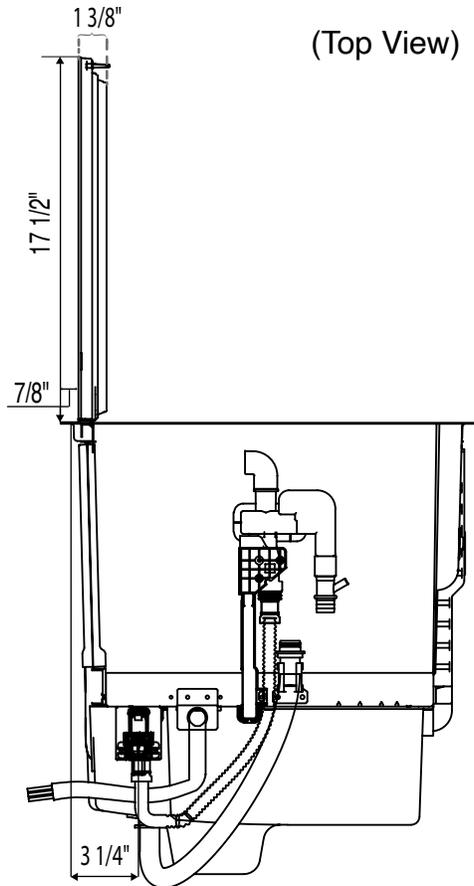

(Left Side View)

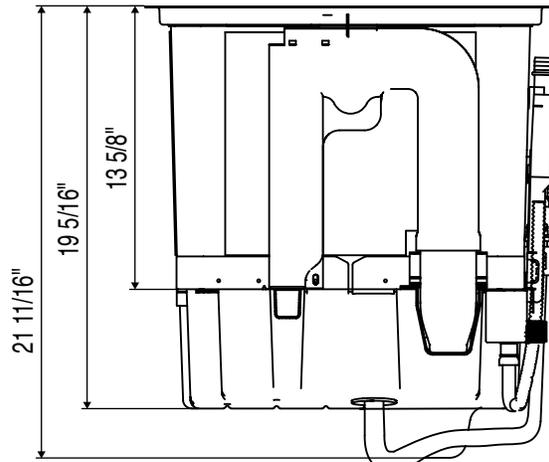

(Rear View)

Product Dimension / Weight

Width	20 9/16"
Depth	20 7/8"
Height	21 11/16"
Net Weight	48.1lbs
Gross Weight	64.8lbs
Cabin Cutout	
Width	19 3/8"
Depth	18 7/8"
Height	≥ 25"
Corner Radius	R 7/16"

The drawings on this page are schematic diagrams and may not in scale. Refer to the specified digits shown for accurate lengths.

Accessories: To purchase FOTILE accessories and parts, please visit us at us.fotileglobal.com or call 1(888) 315-0366.

Notes: All height, width, and depth dimensions are shown in inches. Information is subject to change. Please refer to the FOTILE website for the most up-to-date information.

Warranties: Please see the user manual or FOTILE website for the statement of limited warranty.

For more information on our entire line of products: visit us.fotileglobal.com or call 1(888) 315-0366.

©2024 FOTILE America LLC. All rights reserved. FOTILE is a registered trademark of FOTILE Group.