

### PACKAGE CONTENTS

- Rocketfish 12-Outlet Component-Style Power Center
- *Quick Setup Guide*


### FEATURES

- Component design sits in your TV stand or on a shelf
- Real metal accents and LED lighting for a premium look
- 12 outlets with 4 wide-spaced for easy connection of your components
- 2 USB ports with 4.2 A total power for charging phones, tablets, or other devices
- 6 ft. heavy duty power cord with low-profile plug
- Advanced surge and power filtering for the best protection and performance
- Phone, Ethernet, and coaxial cable connections for total system protection
- 47 dB EMI/RFI noise filtering reduces interference

### USING YOUR POWER CENTER

- 1 Plug the Power Center's power cord into a standard, 3-prong, 120V AC outlet.
- 2 Plug the power cords from up to twelve devices into the AC outlets on the power center.  
**Note:** You may need to push firmly to insert the plug the first few times. This is normal.  
If the LEDs on the Power Center do not light, press the circuit breaker on the unit.
- 3 Plug your USB devices into the USB ports to power or charge them.
- 4 Plug large AC adapters into the widely spaced outlets on top of the power center.

### OVERVIEW

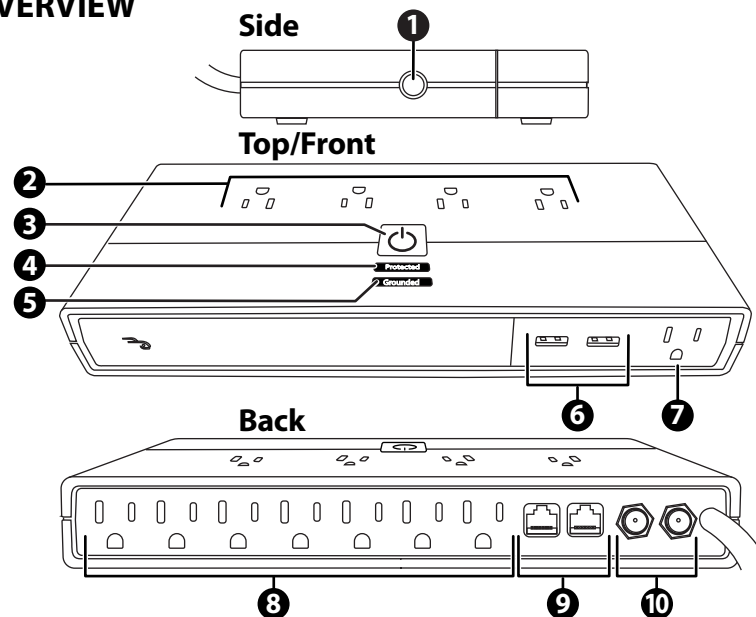

1	Circuit breaker	Press to reset the power center after an overload condition has been resolved.
2	Widely-spaced outlets	Four wide-spaced outlets for bulky AC adapters where you need extra space.
3	Power button	Press to turn the power center on. Press again to turn it off.
4	<b>Protected</b> LED	Lights to indicate the advanced surge protection is working properly. If this LED does not light, or if it goes out, the surge protector has reached full capacity and can no longer absorb additional surges and spikes. The power center should be replaced.
5	<b>Grounded</b> LED	Lights to indicate the advanced two-stage power filtration is working properly and removing interference from the incoming power. If this light goes out, the power center should be replaced.
6	USB ports	Plug your USB devices into these ports to charge them.
7	AC outlet	Plug an AC device into the front for a easy, temporary connection.
8	AC outlets	Plug up to seven AC devices into these outlets.
9	RJ-45 (in/out)	Connect an RJ-45 phone line (in side from the wall connection and out side to your phone or device) to protect it power surges.
10	COAX connector (in/out)	Connect a coaxial cable (in side from the wall connection (in/out) and out side to your modem or device) to protect it from power surges.

## SPECIFICATIONS

- **Dimensions without power cord (H×W×D):** 11.4 x 4.96 x 1.57 in. (29 x 12.6 x 4 cm)
- **Weight:** 34.5 oz. (981g)
- **Plug style:** Right-angle offset
- **Cord length:** 6 ft. (1.8 m)
- **Total outlets:** Twelve (Four widely-spaced)
- **Total USB outlets:** Two, 4.2 A total output

### Electrical specifications:

- **Load rating:** 15 amps
- **Line voltage:** 125V AC @ 60 Hz
- **Surge protection:** 3 lines (L-N / L-G / N-G)
- **Maximum surge current:** 135,000 amps
- **Maximum energy dissipation:** 4,680 joules
- **Clamping voltage:** L-N / L-G / N-G = 600 volts
- **EMI/RFI noise filtering:** Up to 47 dB
- UL1449, UL1363, UL1310 certified

# \$400,000

Connected equipment limited warranty.  
Certain restrictions apply.  
See [www.rocketfishproducts.com](http://www.rocketfishproducts.com) for details.  
Garantía limitada del equipo conectado.  
Se aplican ciertas restricciones. Ver detalles  
en el sitio [www.rocketfishproducts.com](http://www.rocketfishproducts.com).

## SAFETY INFORMATION

- RISK OF ELECTRIC SHOCK - Use only in dry locations and only indoors.
- DO NOT plug into another relocatable power tap.
- DO NOT “daisy chain” surge protectors.
- DO NOT use with any aquarium equipment.
- DO NOT use if correctly grounded outlets are not available.
- DO NOT install this device if there is not at least 30 feet (10 meters) or more of wire between the electrical outlet and electrical service panel.
- This device features internal protection that will disconnect the surge protective component at the end of its useful life, but will maintain power to the load – WHICH WILL BE UNPROTECTED. If you don’t want your equipment at risk, follow the manufacturer’s instructions for replacing the device.
- DO NOT use in any circumstance that would affect the operation or reliability of life support equipment, any medical applications, or patient care.

## FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment.

ICES-003

This Class B digital apparatus complies with Canadian ICES-003.

## ONE-YEAR LIMITED WARRANTY

Visit [www.rocketfishproducts.com](http://www.rocketfishproducts.com) for details.

## CONTACT ROCKETFISH

For customer support, call 1-800-620-2790

[www.rocketfishproducts.com](http://www.rocketfishproducts.com)



ROCKETFISH is a trademark of Best Buy and its affiliated companies.

Distributed by Best Buy Purchasing, LLC. 7601 Penn Ave South, Richfield, MN 55423 U.S.A.

©2020 Best Buy. All rights reserved.