

REBEL

65W Car Charger Manual




Model: C13-D

Getting Started

- Plug the charger into your vehicle's 12V/24V socket. When powered, the blue indicator light will turn on.
- Connect the Type-C cable to one of the two USB-C ports, and plug the other end into your device.
- Unplug the device when fully charged.
- To remove the charger, flip the release pull tab 90 degrees and pull it out. You may also give it a slight twist to help release the charger.

Product Overview

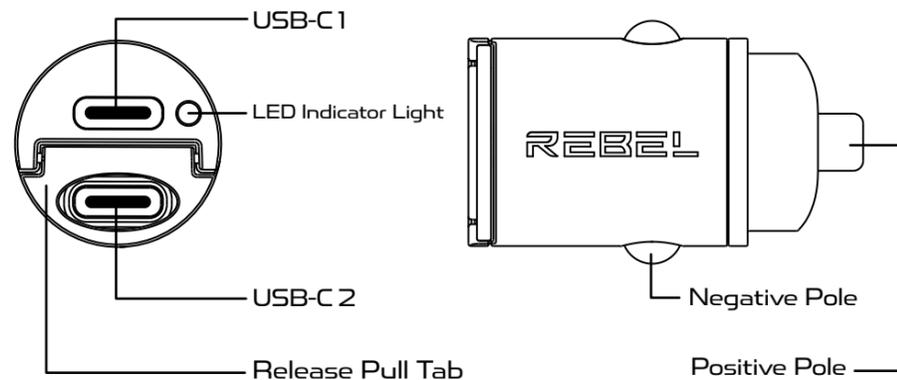

Specifications

Name: 65W Car Charger

Input: DC 12-24V

Model: C13-D

Output:

USB-C1: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A (65W Max)

USB-C2: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A (65W Max)

Total: 65W Max

Size: 4cm*2cm

Note: An output voltage of 15-20V must be achieved when used in vehicles with a 24V system.

Attention

- Do not use the charger in extreme heat or expose it to direct sunlight for prolonged periods.
- Keep the charger away from open flames or high-temperature surfaces.
- Do not use water, solvents, or other chemicals to clean the charger. Use a clean, dry cloth only.
- Do not connect devices that require more than the maximum total output of 65W.
- Always unplug the charger when not in use.
- Keep the product out of reach of children.
- This product is rated for 12-24V systems. If your vehicle's alternator is malfunctioning or unstable, it may cause damage to the charger.

Warranty

This product includes a 12-month limited warranty from the date of purchase. The warranty covers defects in materials and workmanship under normal use.

This warranty does not cover the following:

- Products that exceed the 12-month warranty period.
- Products without a valid purchase date or proof of purchase within the warranty period.
- Damage caused by misuse, neglect, unauthorized repair, modification, or human error.

REBEL

Phone Rebel Inc.
phonerebel.com
support@phonerebel.com

Made in China

