

JVX5360SJ/EJ

GE® Appliances 36" Under The Cabinet Hood

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

WB02X11537 replacement grease filter and JXCF55 replacement charcoal filter are available for additional cost. Call toll-free 800.626.2000.

Installation Information: Before installing, consult installation instructions, packed with product, for current dimensional data.



Additional accessories:

JXS56SS 15" cabinet spacer

JXRC70 remote control

JXDA22 optional damper

AMP RATING	
120V	2.5

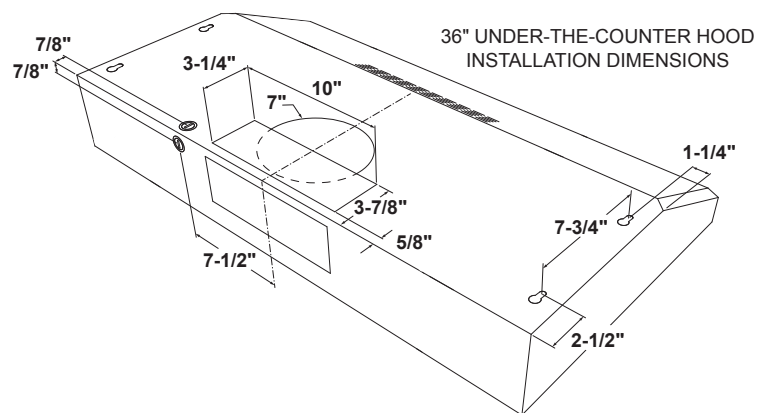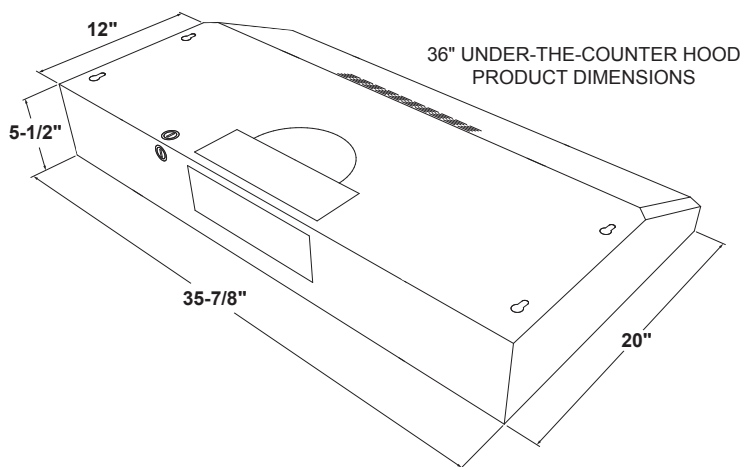

Exhaust outlet connects to 3-1/4" x 10" rectangular duct. Vent top or rear. Includes rectangular damper.



For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Listed by
Underwriters
Laboratories




Specification Revised 5/17

JVX5360SJ/EJ

GE® Appliances 36" Under The Cabinet Hood

FEATURES AND BENEFITS

- Easy installation – 10 minutes or less by one person
- Four-speed with boost, 310-CFM venting system – Removes smoke, grease, odors and moisture
- Electronic backlit controls – Add a sophisticated look with this up-front, easy-to-use display
- Dual halogen lighting with nightlight – Enjoy better visibility with a brightly lit cooktop and surrounding surface
- Auto-off – Set the vent hood to automatically shut off after 15 minutes
- Convertible venting options – Select recirculating or external venting
- Vertical and rear exhaust – Exhausts from the top or rear of the hood
- Appearance (Fully enclosed bottom) – Enjoy a sleek appearance from every angle
- Optional remote control – Control your ventilation lighting and fan speed from anywhere in the kitchen
- Model JVX5360SJSS – Stainless steel
- Model JVX5360EJES – Slate

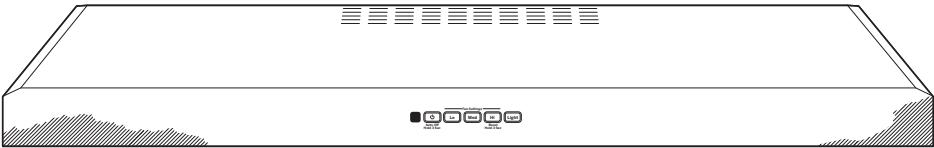

CFM/SONES RATINGS	
Exhaust Boost Speed (BS)	310/7.0
Exhaust High Speed (HS)	260/5.5
Exhaust Medium Speed (MS)	170/3.0
Exhaust Low Speed (LS)	60/1.0

