

PACKAGE CONTENTS

- 2-Output HDMI Splitter
- AC power adapter
- 6 ft. (1.83 m) USB-A to USB-C cable
- Double-sided tape (2)
- *Quick Setup Guide*

FEATURES

- Splits one HDMI source into two HDMI outputs
- Compatible with resolutions up to 8K at 60Hz
- Rubber feet prevent scuffing your desk or table
- Mounting keyholes support flexible placement

SETTING UP YOUR HDMI SPLITTER

You can mount your HDMI splitter to a wall or secure it to a flat surface:


- Mount to a wall using two screws (not provided).

OR


- Secure to a flat surface using the provided double-sided tape to prevent sliding.

OVERVIEW

Front

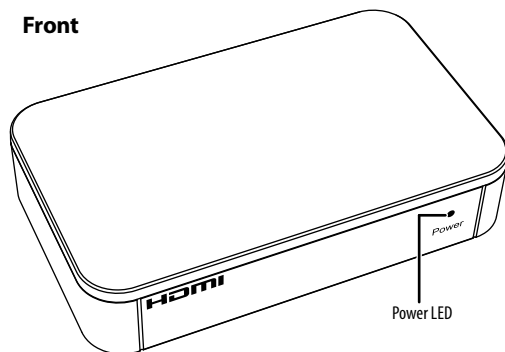

Back

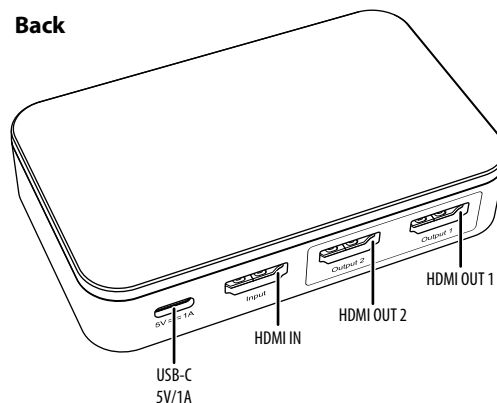


Before using your new product, please read these instructions to prevent any damage.

HDMI SPLITTER BASICS

This Rocketfish HDMI splitter will send HDMI audio and video signals from a single source, such as a Blu-ray/DVD player or cable/satellite box, to two destinations, such as a TV and an AV receiver. It is ideal for sending the audio signal from a 8K/4K source to an AV receiver (one that does not support 8K/4K video passthrough), and video signal to a 8K/4K UHD TV.


Your HDMI splitter supports 8K/4K resolution, please make sure that your source and display support 8K/4K resolution.

Double-sided tape (optional)

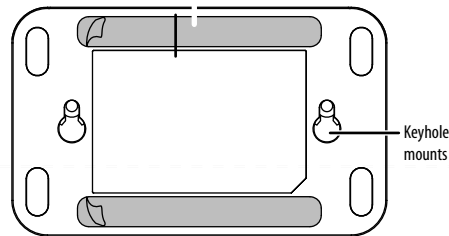

SETTING UP YOUR HDMI SPLITTER


- 1 Using an HDMI cable (not included) connect the HDMI source device (such as a game console, Blu-ray player, or computer) to the **Input** port on your HDMI splitter.

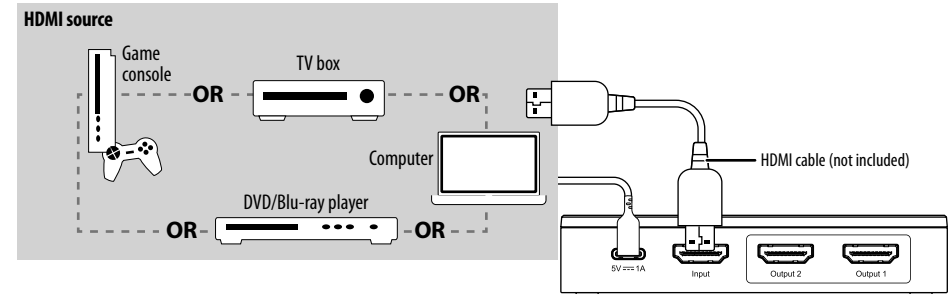

- 2 Using HDMI cable(s) (not included), connect your HDMI display device(s) to the **Output 1** and/or **Output 2** port on your HDMI splitter.


Notes:

- For 8K resolution, the input and output of the HDMI cables should be within 9.84 ft. (3 m) and use HDMI 2.1 cables.
- For 4K resolution, the input and output HDMI cables should be within 16.4 ft. (5 m) and use HDMI 2.0 cables.
- The actual output resolution is related to the host, display, cables, and your HDMI splitter's configuration.

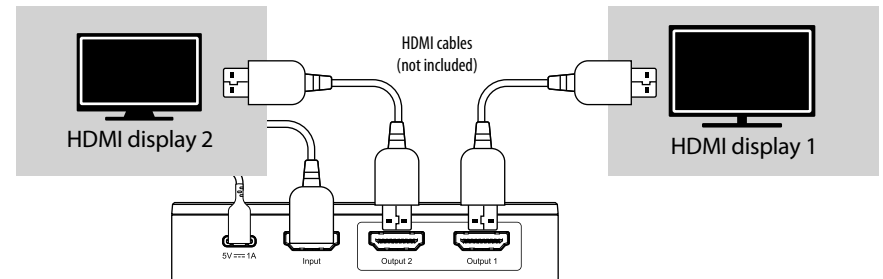

- 3 Plug the power adapter into a wall plug.

- 4 Connect the power adapter to the 5V port on your splitter with the included USB cable. The power LED on the front turns red.

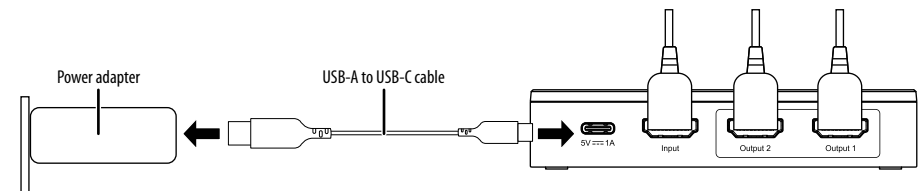

CLEANING YOUR HDMI SPLITTER

- Before cleaning, make sure to unplug all connection plugs on your HDMI splitter.
- Gently wipe the surface of your HDMI splitter with a soft, dry microfiber cloth.
- Avoid using rough materials to prevent scratching the casing.
- Do not use liquid cleaning agents or touch the interfaces directly to avoid damage.

MAINTAINING YOUR HDMI SPLITTER

- Regularly inspect your HDMI cables and USB cable for wear or damage and replace them promptly if there are any issues.
- Place your HDMI splitter in a well-ventilated location to avoid high temperature environments and prevent heat from affecting performance.
- When not in use, store your HDMI splitter in a dry, dust-free location.

SPECIFICATIONS

Physical Specifications:

- **Dimension (HxWxD):** .79 × 3.9 × 2.4 in. (20 × 100 × 61 mm)
- **Weight:** 2.9 oz. (81 g)

Input/Output Connector:

- **Input:** HDMI and USB-C power supply
- **Output:** HDMI (2)

Power Supply:

- **USB-C:** 5V/1A

HDMI Input:

- **Support (Max):** 7680 × 4320 at 60Hz
- **Support RGB:** B/YCbCr4: 4:4/YCbCr4:2:2/YCbCr4:2:0
- **Support HDCP:** 2.3/2.2/1.4
- **Support (Max):** 40Gbps bandwidth (10Gbps per lane)
- **Support:** HDR

HDMI Output:

- **Support (Max):** 7680 × 4320 at 60Hz per port
- **Support RGB:** /YCbCr4:4:4/YCbCr4:2:2/YCbCr4:2:0
- **Support HDCP:** 2.3/2.2/1.4
- **Support (Max):** 40Gbps bandwidth (10Gbps per Lane)
- **Support:** HDR

Environmental:

- **Operating Temperature:** 32° ~ 95° F (0° ~ 35° C)
- **Storage Temperature:** 14° ~ 158° F (-10° ~ 70° C)
- **Operating Humidity:** 10% ~ 85% RH (no condensation)
- **Storage Humidity:** 5% ~ 90% RH (no condensation)

Power Requirement:

- **External Power Supply:** 5V/1A
- **Power Consumption (Max):** 3.5W

TROUBLESHOOTING

I don't see a picture on the output display(s).

- Make sure that all cables are plugged in correctly.
- Make sure that the power adapter is connected and plugged in.
- Make sure that all devices (source and display) are plugged in and turned on.
- Make sure that no cables are damaged or severed.
- Make sure that you have selected the correct input device.
- Make sure that no cables longer than 9.84 ft. (3 m) at 8K60Hz or 16.4 ft. (5 m) at 4K/60Hz.

LEGAL NOTICES

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

LIFETIME LIMITED WARRANTY

Visit www.rocketfishproducts.com for details.

CONTACT ROCKETFISH

For customer support, call 1-800-620-2790
www.rocketfishproducts.com



ROCKETFISH is a trademark of Best Buy and its affiliated companies.
Distributed by Best Buy Purchasing, LLC
7601 Penn Ave South, Richfield, MN 55423 U.S.A.
©2025 Best Buy. All rights reserved.