

QUICK SETUP GUIDE

Wall Charger

20W

- NS-MW320C1W22
- NS-MW320C1W22B
- NS-MW320C1W24B

25W

- NS-MW325C1B22
- NS-MW325C1B24B

30W

- NS-MW330C1W22B
- NS-MW330C1W24
- NS-MW330C1W24B

35W


- NS-MW335C2W22 (dual ports)

45W

- NS-MW345C1B22
- NS-MW345C1B22B
- NS-MW345C2W22 (dual ports)



FEATURES

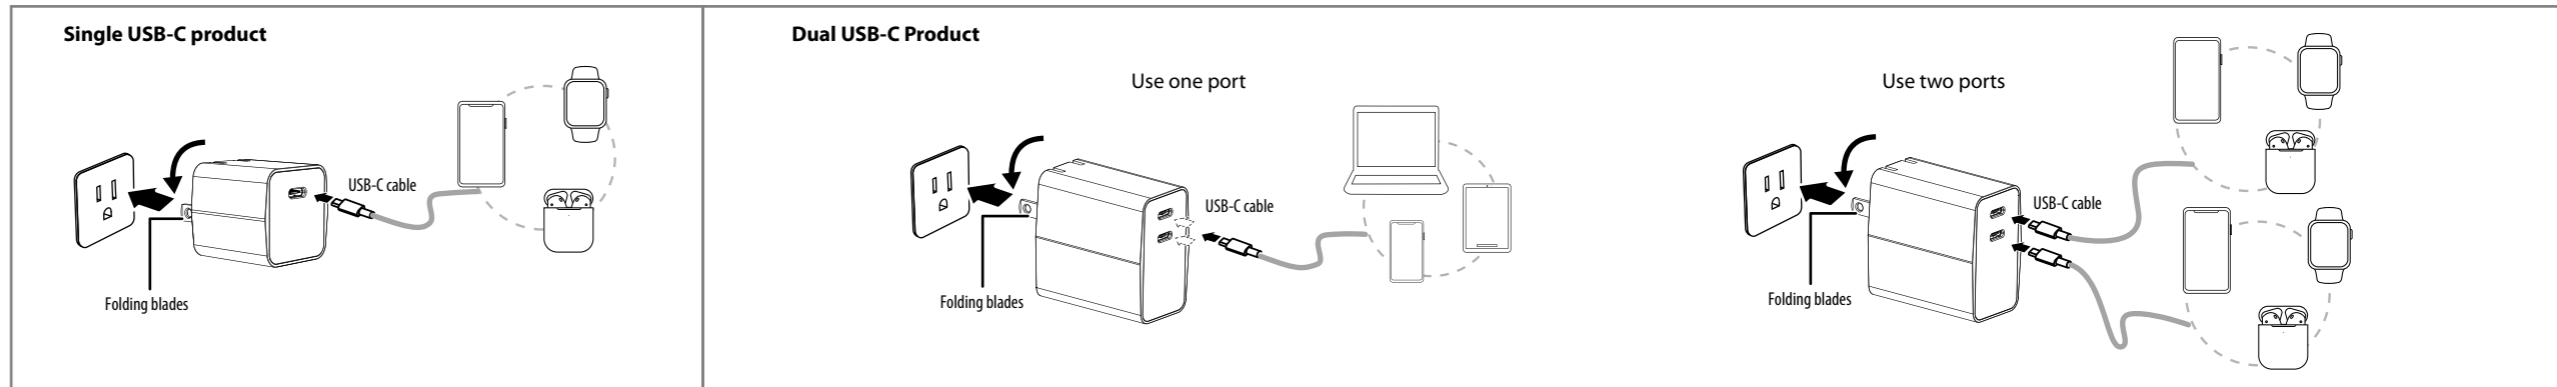

SPECIFICATIONS

MODEL#	FOR APPLE							FOR SAMSUNG				FOR ALL MOBILE DEVICES
	NS-MW320C1W22	NS-MW320C1W22B	NS-MW320C1W24B	NS-MW330C1W24	NS-MW330C1W22B	NS-MW330C1W24B	NS-MW335C2W22	NS-MW325C1B22	NS-MW325C1B24B	NS-MW345C1B22	NS-MW345C1B22B	NS-MW345C2W22
POWER	20W	20W (with Lightning cable)	20W (with USB-C cable)	30W	30W (with Lightning cable)	30W (with USB-C cable)	35W (Dual Ports)	25W	25W (with USB-C cable)	45W	45W (with USB-C cable)	45W (Dual Ports)
COMPATIBLE DEVICES												
PACKAGE CONTENTS	<ul style="list-style-type: none"> • Wall Charger • Quick Setup Guide 	<ul style="list-style-type: none"> • Wall Charger • 6 ft. MFi certified USB-C to Lightning cable • Quick Setup Guide 	<ul style="list-style-type: none"> • Wall Charger • 6 ft. 60W USB-C to USB-C cable • Quick Setup Guide 	<ul style="list-style-type: none"> • Wall Charger • Quick Setup Guide 	<ul style="list-style-type: none"> • Wall Charger • 6 ft. MFi certified USB-C to Lightning cable • Quick Setup Guide 	<ul style="list-style-type: none"> • Wall Charger • 6 ft. 60W USB-C to USB-C cable • Quick Setup Guide 	<ul style="list-style-type: none"> • Wall Charger • Quick Setup Guide 	<ul style="list-style-type: none"> • Wall Charger • Quick Setup Guide 	<ul style="list-style-type: none"> • Wall Charger • 6 ft. 60W USB-C to USB-C cable • Quick Setup Guide 	<ul style="list-style-type: none"> • Wall Charger • Quick Setup Guide 	<ul style="list-style-type: none"> • Wall Charger • 6 ft. 100W USB-C to USB-C cable • Quick Setup Guide 	<ul style="list-style-type: none"> • Wall Charger • Quick Setup Guide

MODEL#	FOR APPLE							FOR SAMSUNG				FOR ALL MOBILE DEVICES
	NS-MW320C1W22	NS-MW320C1W22B	NS-MW320C1W24B	NS-MW330C1W24	NS-MW330C1W22B	NS-MW330C1W24B	NS-MW335C2W22 (Rev. B)	NS-MW325C1B22 (Rev. B)	NS-MW325C1B24B (Rev. B)	NS-MW345C1B22	NS-MW345C1B22B	NS-MW345C2W22
INPUT	100-240V ~ 50/60Hz	100-240V ~ 50/60Hz	100-240V ~ 50/60Hz	100-240V ~ 50/60Hz	100-240V ~ 50/60Hz	100-240V ~ 50/60Hz	100-240V ~ 50/60Hz	100-240V ~ 50/60Hz	100-240V ~ 50/60Hz	100-240V ~ 50/60Hz	100-240V ~ 50/60Hz	100-240V ~ 50/60Hz
OUTPUT	5V==3A, 9V==2.22A	5V==3A, 9V==2.22A	5V==3A, 9V==2.22A	5V==3A, 9V==3A, 15V==2A, 20V==1.5A	5V==3A, 9V==3A, 15V==2A, 20V==1.5A	5V==3A, 9V==3A, 15V==2A, 20V==1.5A	35W Max Use One Port: USB-C1/C2: 35W 5V==3A, 9V==3A, 15V==2.33A, 20V==1.75A (PPS) 5-11V==3A, 30W Max. Use Two Ports: USB-C1+USB-C2: (dynamic) 35W Max 17.5W+17.5W or 27.5W+7.5W	5V==3A, 9V==2.77A (PPS) 5-11V==2.75A, 25W Max.	5V==3A, 9V==2.77A (PPS) 5-11V==2.75A, 25W Max.	5V==3A, 9V==3A, 15V==3A, 20V==2.25A (PPS) 3.3-11V/4.05A, 3.3-16V/3A, 45W Max	5V==3A, 9V==3A, 15V==3A, 20V==2.25A (PPS) 3.3-11V/4.05A, 3.3-16V/3A, 45W Max	Use One Port: 45W 5V==3A, 9V==3A, 15V==3A, 20V==2.25A (PPS) 3.3-11V/4.05A, 3.3-16V/3A, 45W Max Use Two Ports: 20W+20W 5V==3A, 9V==2.22A (PPS) 3.3-11V/2.2A, 20W Max
DIMENSION (L x W x H)	1.2 x 1.2 x 1.3 in. (32 x 32 x 33.5 mm)			1.3 x 1.3 x 1.4 in. (34 x 34 x 36.5 mm)			1.5 x 1.2 x 1.5 in. (39 x 32 x 40 mm)	1.2 x 1.2 x 1.3 in. (32 x 32 x 33.5 mm)		1.4 x 1.4 x 1.6 in. (38 x 38 x 41.5 mm)		1.7 x 1.2 x 1.8 in. (45 x 32 x 47 mm)
WEIGHT (CHARGER ONLY, Approx.)	1.4 oz. (40 g)			1.7 oz. (50 g)			2.1 oz. (60 g)	1.4 oz. (40 g)		2.4 oz. (70 g)		2.8 oz. (80 g)

TROUBLESHOOTING

My device isn't charging.

- Make sure that the charger is connected securely to the wall plug.
- Make sure that your device is securely connected to the charger.

My device is charging slowly.

- Make sure that the power requirements of your device match the power delivery of the charger.
- Stop using your device while it is charging.
- Close apps that run in the background on your device.

- Devices may start charging slower as they get older. This is normal.

SAFETY INFORMATION/CAUTION

READ ALL INSTRUCTIONS BEFORE USING.

- THIS PRODUCT IS NOT A VOLTAGE CONVERTER. Use this adapter only if the power outlet voltage is within the range of your device's voltage. Using this adapter with an incompatible device and power outlet may result in a risk of fire, electric shock, injury to persons, or damage to the device.
- Always disconnect the adapter and the device from the power outlet when not in use.
- Do not expose the adapter to high temperatures or humid environments.

- Do not place the product into a fire or submerge it in liquid.
- Do not disassemble the product.
- Avoid external shocks.
- The product will heat slightly when charging and discharging. This is normal.
- Do not operate the adapter with wet hands.
- Keep out of reach of children.
- Indoor use only
- Protection class II appliance.

LEGAL NOTICES

1.FCC Caution:

Changes or modifications not expressly approved by the part responsible for compliance could void the user's

authority to operate the equipment.

FCC Statement: This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off

and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2. CAN ICES-003 B/NMB-003 B

ONE-YEAR LIMITED WARRANTY

Visit www.insigniaproducts.com for details.

CONTACT INSIGNIA:

For customer service, call 1-877-467-4289 (U.S. and Canada) www.insigniaproducts.com

INSIGNIA is a trademark of Best Buy and its affiliated companies
Distributed by Best Buy Purchasing, LLC
7601 Penn Ave South, Richfield, MN 55423 U.S.A.
©2024 Best Buy. All rights reserved.