


Reolink Video Doorbell PoE

2K+ 5MP PoE Wired Video Doorbell with Chime

- Chime Included
- 2K+ (5MP) HD Video
- Person Detection

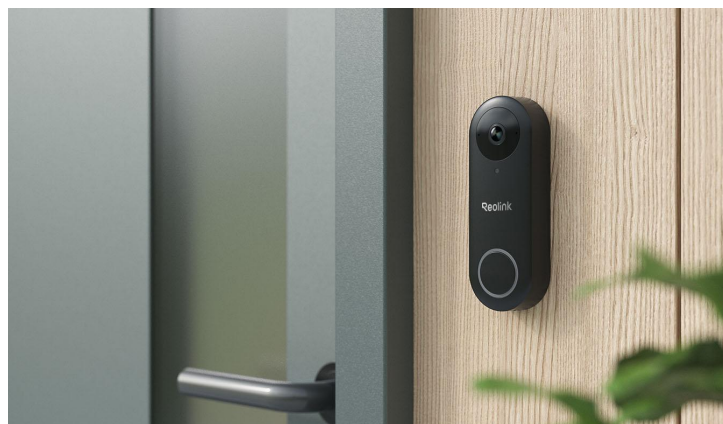

Specifications

Reolink Video Doorbell PoE (White)	
Video & Audio	
Image Sensor	1/2.7" CMOS Sensor
Video Resolution	Default: 1920×2560 (5 megapixels) @20FPS
Lens	f=2.26mm F=2.0, with IR cut
Videoformat	H.264
Field of View	Horizontal: 100° Vertical: 135° Diagonal: 180°
Pre-Motion Recording	YES
Audio	Two-way audio, noise reduction, echo suppression
Quick Replies	YES
Power	
PoE	IEEE 802.3af, 48V Active
Hardwired	12 – 24VAC 50/60Hz, 24VDC
Interfaces	

Power	Power port
System	Reset button
Ethernet	One 10M/100Mbps RJ45
Storage	microSD card slot (Max. 256GB), works with Reolink NVR
Audio	Built-in two microphones & one speaker
Software	
Frame Rate	Mainstream: 2fps - 20fps (default: 20fps) Substream: 4fps - 15fps (default: 10fps)
Code Rate	Mainstream: 1024Kbps - 6144Kbps (default: 4096Kbps) Substream: 64Kbps - 512Kbps (default: 256Kbps)
Browsers Supported	Edge, Chrome, Firefox, Safari
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Smart Alarm	Motion detection/person detection; visitor notification
Recording Modes	Motion recording (default); 24/7 recording; scheduled recording
Protocols & Standards	HTTPS, IPv4, UPNP, RTSP, RTMP, ONVIF, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P
Work with	Google Assistant
Working Environment	
Temperature	Operating temperature: -10°C – +55°C (14°F–131°F)
Humidity	Operating humidity: 10% – 90%
Weatherproof	IP65
Size & Weight	
Dimensions	133mm (H) ×48mm (W) ×23mm (T)
Weight	96g
Warranty	
Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/
Reolink Chime (EU Version)	

Size & Weight	
Material	ABS+PC
Dimensions	86.5 x 29 x 66 mm
General	
Input	AC 100-240 V; 50-60 Hz
Button	For setting up/selecting ringtones/adjusting volume
Transmission Mode	RF 433 MHz
Volume	5 levels
Number of Selectable Ringtones	10 ringtones
Working Environment	Temperature: -20°C~50°C; Humidity: <85%
Warranty	
Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/ .
Reolink Chime (AU Version)	
Size & Weight	
Material	ABS+PC
Dimensions	86.5 x 30.6 x 47.6 mm
General	
Input	AC 100-240 V; 50-60 Hz
Button	For setting up/selecting ringtones/adjusting volume
Transmission Mode	RF 433 MHz
Volume	5 levels
Number of Selectable Ringtones	10 ringtones
Working Environment	Temperature: -20°C~50°C; Humidity: <85%
Warranty	
Limited Warranty	

2-year limited warranty. For support, visit <https://support.reolink.com/hc/en-us/>.

Reolink Chime (UK Version)

Size & Weight

Material	ABS+PC
Dimensions	86.5 x 29 x 66 mm

General

Input	AC 100-240 V; 50-60 Hz
Button	For setting up/selecting ringtones/adjusting volume
Transmission Mode	RF 433 MHz
Volume	5 levels
Number of Selectable Ringtones	10 ringtones
Working Environment	Temperature: -20°C~50°C; Humidity: <85%

Warranty

Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/ .
------------------	---

Reolink Chime (US Version)

Size & Weight

Material	ABS+PC
Dimensions	86.5 x 29 x 45.2 mm

General

Input	AC 100-240 V; 50-60 Hz
Button	For setting up/selecting ringtones/adjusting volume
Transmission Mode	RF 433 MHz
Volume	5 levels
Number of Selectable Ringtones	10 ringtones
	Temperature: -20°C~50°C; Humidity: <85%


Working Environment	
Warranty	
Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/ .
Reolink Video Doorbell PoE (Black)	
Video & Audio	
Image Sensor	1/2.7" CMOS Sensor
Video Resolution	Default: 2560X1920 (5 megapixels) @20FPS
Lens	f=2.26mm F=2.0, with IR cut
Videoformat	H.264
Field of View	<ul style="list-style-type: none"> • Horizontal: 135° • Vertical: 100° • Diagonal: 180°
Pre-Motion Recording	Support
Audio	Two-way audio, noise reduction, echo suppression
Quick Replies	Support
Power	
PoE	IEEE 802.3af, 48V Active
Hardwired	12-24VAC 50/60Hz, 24VDC
Interfaces	
Power	Power port
System	Reset button
Ethernet	One 10M/100Mbps RJ45
Storage	microSD card slot (Max. 256GB), works with Reolink NVR
Audio	Built-in 2 microphones & a speaker
Software	
Frame Rate	<ul style="list-style-type: none"> • Mainstream: 2fps - 20fps (default: 20fps) • Substream: 4fps - 15fps (default: 10fps)

Code Rate	<ul style="list-style-type: none"> • Mainstream: 1024Kbps - 6144Kbps (default: 4096Kbps) • Substream: 64Kbps - 512Kbps (default: 256Kbps)
Browsers Supported	Edge, Chrome, Firefox, Safari
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Smart Alarm	Motion detection/person detection; visit notification
Recording Modes	Motion recording (default); 24/7 recording; scheduled recording
Protocols & Standards	HTTPS, IPv4, UPNP, RTSP, RTMP, ONVIF, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P
Work with	Google Assistant
Working Environment	
Temperature	Operating temperature: -10°C~+50°C (14°F~122°F)
Humidity	Operating humidity: 10% ~ 90%
Weatherproof	IP65
Size & Weight	
Dimensions	133mm(H) x 48mm(W) x 23mm(T)
Weight	96g
Warranty	
Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/ .

Gallery & Specs



1. Lens
2. Microphone
3. IR LED
4. Daylight Sensor
5. Button
6. Doorbell Status Light
7. Chime Status Light

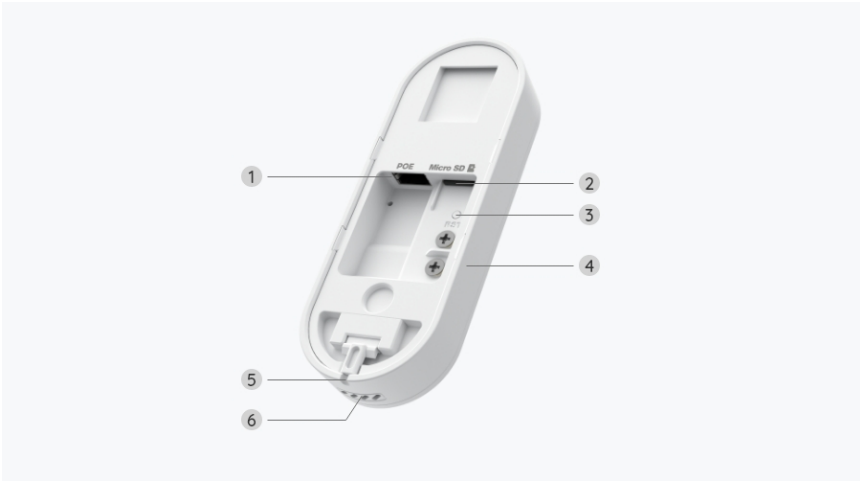

- 1. PoE Port
- 2. microSD Card Slot
- 3. Reset Button
- 4. Wiring Terminal
- 5. Pin Hole
- 6. Speakers



- 1. Lens
- 2. Microphone
- 3. IR LED
- 4. Daylight Sensor
- 5. Button
- 6. Doorbell Status Light
- 7. Chime Status Light



- 1. PoE Port
- 2. microSD Card Slot
- 3. Reset Button
- 4. Wiring Terminal
- 5. Pin Hole
- 6. Speakers