



**SALAMANDER**  
DESIGNS

# ACCENT LIGHTING SYSTEM

---

## SD/LS2/W USER MANUAL

### FEATURE:

---

- Adjustable Color Temperature:  
Cool White to Warm White  
(6500K - 3000K)
- Includes 2 - 15" (380mm) light bars  
Expandable to 6 Light Bars
- Full dimming and brightness control
- Breath Mode and Sleep Timer
- Infrared remote control
- Up to 3 memory settings
- Voltage: Input 110/240V  
Output: DC12V. Interchangeable  
international plug heads

### HOME THEATER EXPERIENCE TIPS

---

- You can adjust the width of the illuminated area by rotating the LED light bar. Rotating the LEDs outwards will broaden the lighted area while rotating the LEDs inward will reduce the lighted area.
- Back lighting and highlights of TV's can reduce eye strain while watching TV in low ambient light conditions.
- Optional expansion LED light bars are available in lengths of 15" (380mm) or 24" (610mm). These will allow lighting of other areas such as large TV's, speakers, book cases, etc.

### WARRANTY


---

#### Salamander Electronic Accessories Warranty Limitations






Salamander provides a two (2) year Limited Warranty on Electronic Accessories. This warranty covers the repair or replacement, at Salamander's option, of any product defective in materials or craftsmanship.

**For full Warranty see [www.salamanderdesigns.com/customer-service/warranty](http://www.salamanderdesigns.com/customer-service/warranty)  
[www.salamanderdesigns.com](http://www.salamanderdesigns.com) | 800.535.5659**

# PARTS

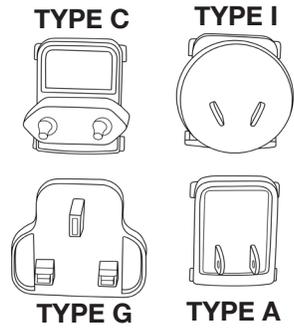

**Interchangeable Plug Heads**

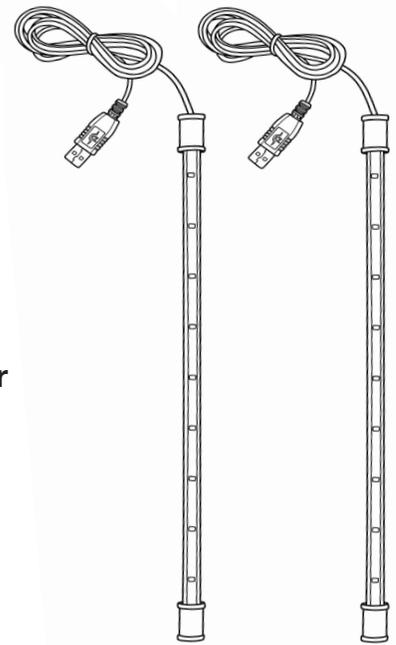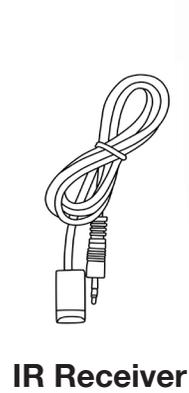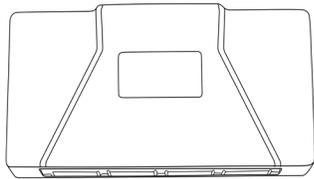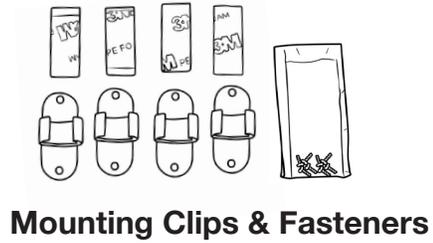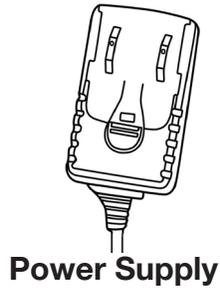

## WARNING

DO NOT USE SCREWS TO FASTEN TO ELECTRONIC DEVICES OR SENSITIVE SURFACES.

NEVER APPLY PRESSURE TO THE CLEAR TUBE. LIGHTS WILL GET DAMAGED.

DO NOT PLUG INTO POWER SUPPLY UNTIL LIGHTING IS ALL CONNECTED.

# INSTALLATION

---


## 1. Select appropriate plug head and attach it to the power supply.

(NOTE: There are **FOUR** different international heads included)

## 2. Connect IR Receiver and Power Supply to Digital Control Hub.

- A. Mount Digital Control Hub in suitable location.
- B. Connect Power Supply to Digital Control Hub
- C. Connect IR Receiver to Digital Control Hub

(NOTE: It is important to place the IR Receiver in a visible location for the Remote to interact with the IR Receiver)

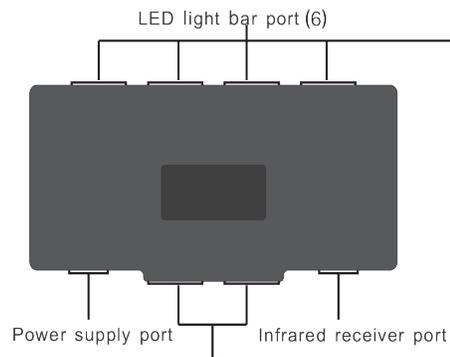

## 3. Find Desired Location for Light Bars

For Most installations the best location is usually behind the object about 1-4 inches from the outer edge. Try different positions for different objects until desired result is reached.


**For Cabinet Installations-** Light bars maybe installed vertically along cabinet sides or horizontally under cabinet shelves.

## 4. Clean Mounting Surface and Install Mounting Clips

Clean the installation Surface free of dust/grease to assure the Two-Sided tape will adhere well. **Do Not use a solvent that will effect surface area.** Remove paper on one side of Two-Sided tape and adhere to back of bracket. Then removing the paper on the other side of Two-Sided tape, place bracket to mounting surface and hold for 5 seconds. Insert Lighting Bars and plug into HUB

(Note: Screws are **NOT** to be fastened to electronics or sensitive surfaces.)

## 5. Controller settings for the SD/LS2/W

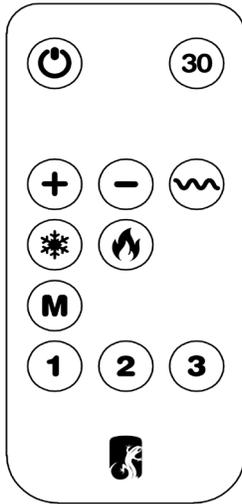

- POWER - ON/OFF



- SLEEP TIMER- Turns system off in increments of 30 minutes.

Push once for 30 minutes, push twice for 1 hour etc... up to a maximum of 6 hours. The system will confirm settings with a quick flash for each 30 minute increment.



- BREATH- Slow fade in and out of light. Push to start/stop.



- BRIGHTNESS- Press plus or minus icon to select desired brightness. 20 Brightness levels. Press and hold for rapid change.



- FIRE & ICE- Adjustable White Color Temperature. From cool white to warm white (6500K - 3000K)



- MEMORY- 3 lighting settings can be saved.

### PROGRAMMING MEMORY:

1. Choose favorite setting, then press the Memory button (M)
2. When lights flash twice, SELECT buttons 1, 2 or 3 to save
3. Check Memory button to be sure setting was saved.
4. If not saved repeat process.

### TO RESTORE MEMORY TO FACTORY SETTINGS:

Press the "Power" button to turn off. Then in sequential order press buttons "3", "2", "Sleep". The light bars will flash once and factory settings will be restored.

**MEMORY 1-** 4400K

**MEMORY 2-** 3000K

**MEMORY 3-** Breath with 6500K



www.salamanderdesigns.com  
800.535.5659