

DAS 2620

Built-in ventilation hood
with EasySwitch controls for convenient operation



- Classic design – stainless-steel panel, 24 in (60 cm) wide
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover
- Recirculation mode – Active AirClean or Longlife AirClean filter

EAN: 4002516495505 / Material number: 11878490 /
Old Material Number: 28S2620SUSA

General information	
Design	
Built-in ventilation hood	•
Operating modes	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151,DUU 150
OdorFree charcoal filter (order separately)	DKFS 31-R, DKFS 31-900 P
Design	
Color	Stainless steel
User convenience	
Electronic controls	•
Booster levels	1
Efficiency and sustainability	
AC motor	•
Cleaning convenience	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	1
Lighting	
Number x W	1 x 3,0 W
Light intensity in lx	330 lx
Color temperature in K	3500 Kelvin
Blower	
Dual-action blower	•
Exhaust air	
Air throughput in CFM in Booster	498
Air throughput with Booster level 1 (m ³ /h) according to EN 61591	497.35 (845)
Safety	
Safety shut-off	•
Technical data	
Canopy width in in.(mm)	23 1/2 (596)
Canopy height in in.(mm)	1 1/2 (36)
Canopy depth in in.(mm)	10 3/4 (273)
Net weight in lbs. (kg)	31 (14.0)
Length of electrical wire in ft (m)	2 (0.8)
Standard plug fitted	•
Minimum height above electric cooktops in mm	24 1/8 (610)
Minimum safety distance above gas cooktops (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Number of phases	1
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15
Frequency in Hz	60
Installation note	
Vent connection at top	•

DAS 2620

Built-in ventilation hood
with EasySwitch controls for convenient operation



EAN: 4002516495505 / Material number: 11878490 /
Old Material Number: 28S2620SUSA

Diameter of vent connection in in.(mm)


6 (150)

Standard accessories

Non-return flap


•

DAS 2620 Built-in ventilation hood with EasySwitch controls for convenient operation

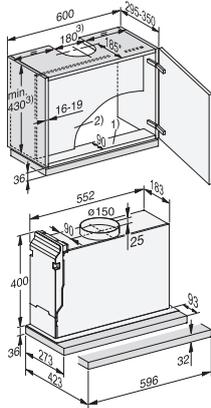

DAS2620, DAS2622 Living, DAS2620 EXTA, DAS4620,
Installation drawings

1) The front section of the wall unit must be fitted with a base panel to secure the cooker hood. If the appliance is fitted further back, e.g. to accommodate a front panel, then the shelf depth should be deeper accordingly. 2) If a partition wall is to be provided in the unit, it must be removable. 3) Extraction, recirculation with conversion kit DUU 150. * In this installation situation, the deflector plate is flush with the front edge of the housing unit carcass. If you wish to position the cooker hood further forward or further back (e.g. because it has a front panel), dimensions have to be adapted accordingly. Extraction: the height of the wall unit and the cut-out dimensions must take into account any accessories fitted, e.g. silencer, recirculation hood conversion kit).

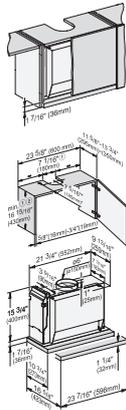

DAS2620, drawing – US

1) Exhaust air, mounted accessories must be taken into account for dimensions of cabinet height and cutouts. 2) Exhaust air, recirculation with DUU 150 conversion kit. * In this installation situation, the screen is flush with the front edge of the cabinet. If the cooker hood is positioned further to the front or rear (e.g. when using a front panel), the dimensions must be adjusted accordingly.