




CONSTRUCTED FROM PURE 100% VIRGIN COPPER

Stinger's power and speaker wire is made of True-Spec, tinned, oxygen-free copper for oxidation prevention, making Stinger one of the best conductors available. Our wire boasts Hyper-Twist construction, creating a dense yet incredibly flexible wire that's easy to install & provides outstanding performance.

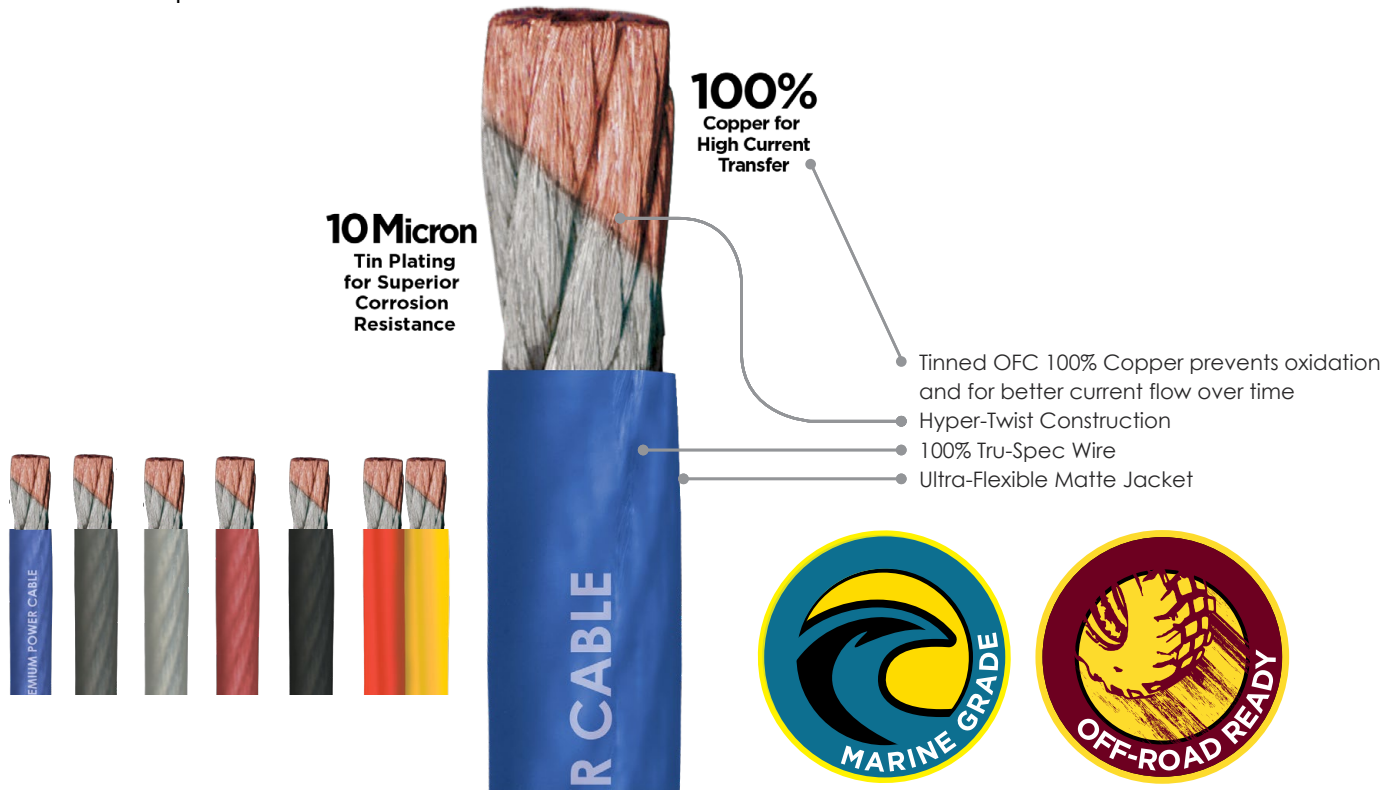

Why Stinger Only Uses OFC Copper

100% Copper															
COPPER WIRE AMPERAGE in Feet															
GAUGE		10	20	30	40	50	60	75	100	150	200	350	500	750	1000
	000							95	72	48	36	22	15	10	8
	1/0							61	45	30	23	15	9		
	3				57	45	38	29	20	15	12	7			
	4			60	45	36	30	24	18	12	9				
	8		36	24	18	14	12	9							
	10	22	15	11	9										
Conservative Loss Adjustment for CCA 45%															
CCA WIRE AMPERAGE in Feet															
GAUGE		10	20	30	40	50	60	75	100	150	200	350	500	750	1000
	000							52	40	26	20	12	8	6	4
	1/0							34	25	17	13	8	5		
	3				31	25	21	16	11	8	7	4			
	4			33	25	20	17	13	10	7	5				
	8		20	13	10	8	7	5							
	10	12	8	6	5										