

QUICK SETUP GUIDE

8-Outlet Surge Protector

NS-HW503


FEATURES

- Eight outlets to easily connect your TV and AV components
- 600 joules of surge protection keep your system safe
- 4 ft. (1.2 m) power cord for flexible placement
- Sleek black housing matches most modern home theater electronics
- 32 dB EMI/RFI noise filtering prevents interference

PACKAGE CONTENTS

- Surge protector
- *Quick Setup Guide*

OVERVIEW

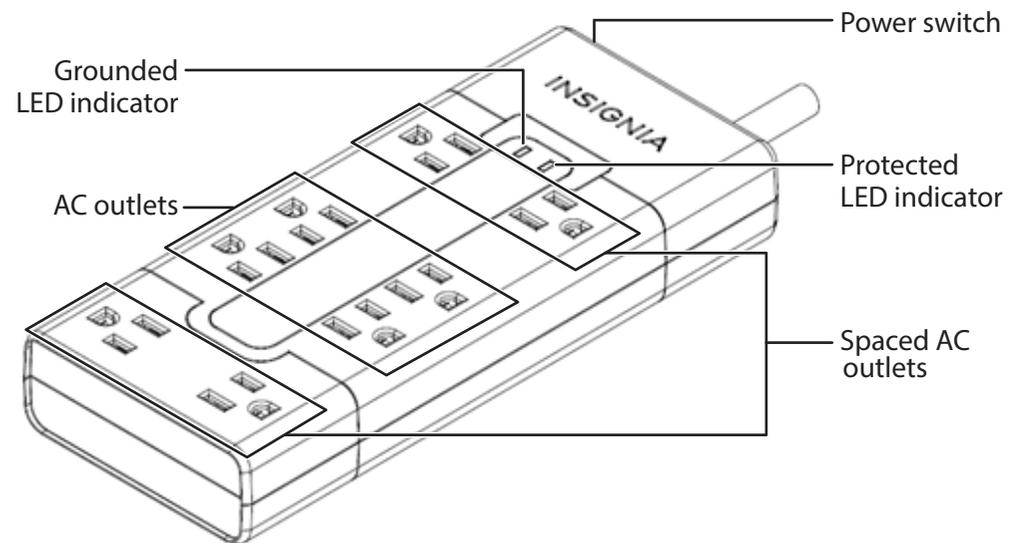

USING YOUR SURGE PROTECTOR

- 1 Plug your surge protector into a standard (125V) wall outlet. If the LEDs don't light up, make sure that the power switch is in the ON position.
Note: If the protection LED does not turn on, your surge protector cannot absorb additional power surges or spikes. Replace your surge protector.
- 2 Plug up to eight devices into the surge protector's outlets, using the spaced outlets for bulkier adapters. You may need to push firmly to insert the plug.

UNDERSTANDING LED INDICATORS

- **Grounded LED indicator:** Lights when connected to a properly grounded outlet. If this LED doesn't light, connect to a different outlet or contact an electrician to inspect your outlet's wiring.
- **Protected LED indicator:** Lights to show that your devices are protected from power surges. If this LED doesn't light, your surge protector cannot absorb additional power surges and you must replace your surge protector.

SPECIFICATIONS

- **Dimensions without power cord (L×W×H):**
8.7 × 3.6 × 1.4 in. (22.0 × 9.1 × 3.5 cm)
- **Weight:** 16.6 oz (472 g)
- **Plug style:** straight plug
- **Cord length:** 4 ft. (1.2 m)
- **Total outlets:** 8 (4 spaced)
- **Surge suppression:**
 - **Max. energy dissipation:** 600 joules
 - **Max. surge current:** 30,000 amps
- **EMI/RFI noise filtering:** Up to 32 dB
- **Load rating:** 15 amps
- **Line voltage:** 125V AC @ 60 Hz
- **Surge protection:** 3 lines (L-N / L-G / N-G)
- **Clamping voltage:** L-N = 400 volts, L-G / N-G = 500 volts
- UL-1449 certified

SAFETY INFORMATION

- RISK OF ELECTRIC SHOCK - Use only in dry locations and only indoors.
- DO NOT plug into another relocatable power tap.
- DO NOT “daisy chain” surge protectors.
- DO NOT use with any aquarium equipment.
- DO NOT use if correctly grounded outlets are not available.
- DO NOT install this device if there is not at least 30 feet (10 meters) or more of wire between the electrical outlet and electrical service panel.
- This device features internal protection that will disconnect the surge protective component at the end of its useful life, but will maintain power to the load – WHICH WILL BE UNPROTECTED. If you don't want your equipment at risk, follow the manufacturer's instructions for replacing the device.
- DO NOT use in any circumstance that would affect the operation or reliability of life support equipment, any medical applications, or patient care.

ONE-YEAR LIMITED WARRANTY

Visit www.insigniaproducts.com for details.

CONTACT INSIGNIA

For customer support, call 1-877-467-4289 (U.S. and Canada) or 01-800-926-3000 (Mexico)

www.insigniaproducts.com

INSIGNIA is a trademark of Best Buy and its affiliated companies

Distributed by Best Buy Purchasing, LLC

7601 Penn Ave South, Richfield, MN 55423 U.S.A.

©2018 Best Buy. All rights reserved.

Made in China