



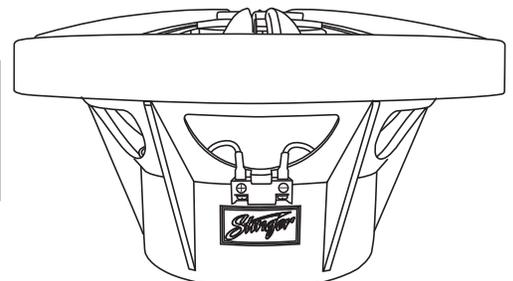

MARINE-GRADE 4-OHM SUBWOOFERS

SEA12S4 (grill included)

- Fully marinated against salt & fresh water conditions
- UV testing exceeds industry standards for years of durability
- Salt and fog tested to battle the harshest environments
- Precision non-corrosive terminals create a solid connection in any environment
- 150W RMS / 300W Peak Power Handling
- Polypropylene Mica Injected Cone
- Butyl rubber surround

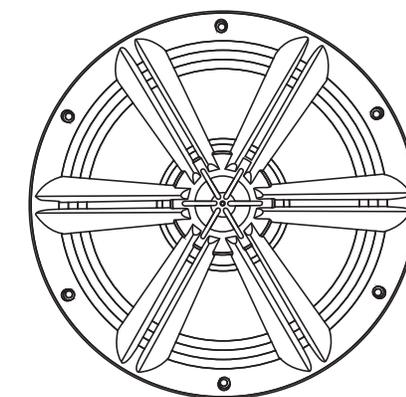

12.50in / 318mm

5.71in / 145mm

11.125in / 282mm

12.50in / 318mm

12.50in / 318mm

T/S Parameter	SEA12S4
Re (Dcr)	3.6
FS (Hz)	30.491
Sd (SqM)	0.053
BL TM	11.53
Qms	2.894
Qes	0.541
Qts	0.456
Vas (cu L)	58.842
Cms (uM/N)	147.018
Mms (gms)	185.317
SPL	86.761dB
Impedance (Ohms)	Single 4-Ohm
RMS Power Handling	150 watts
PEAK Power Handling	300 watts
Xmax (Peak to Peak)	6.9mm
Driver Displacement (cf)	0.10
Mounting Diameter	11 1/8in - 282mm
Mounting Depth	5.71in / 145mm

Free-Air Compatible

SEALED	SEA12S4
Minimum Sealed or Larger/Free Air	1.89
VENTED - Rock / Punchy Bass @ 40Hz	SEA12S4
(cu. Ft.)	1.89
Vent Area (sq in)	18.125
Vent Length (in)	1.5
VENTED - Hip Hop / Low Bass @ 35Hz	SEA12S4
(cu. Ft.)	2.75
Vent Area (sq in)	36.25
Vent Length (in)	2.3

Enclosure recommendations