



SPECIFICATIONS

Product Name	A850GLS MLG EDITION
Form Factor	ATX
Power Wattage	850W
Efficiency Rating	80 PLUS Gold, Cybenetics Gold, PPLP Gold
Modularity	Fully-Modular
Fan Size	135 mm
Fan Bearing	Fluid Dynamic Bearing
Dimensions (D x W x H)	150 x 150 x 86mm / 5.9 x 5.9 x 3.4 inches
PFC Type	Active PFC
Input Voltage Range	100-240V~
Input Frequency Range	47-63Hz
Protection	OCP/ OTP/ OPP/ SCP/ OVP/ UVP/ SIP/ NLO

- 80 PLUS Gold Certification
- PCIe 5.1 and ATX 3.1 Ready
- Optimized the sound level, just like in the midnight, ensuring a peaceful computing experience.
- Dual-color 12V-2x6 Cable
- Embossed Jacket Cables, enhance the cable's flexibility and bendability
- Pre-installed Cable Organizer
- Semi Digital
- 105°C Main Electrolytic Capacitor
- Active PFC Design
- Half bridge + LLC + SR
- DC-DC Module Design




A850GLS MLG EDITION					
AC INPUT	100-240V~, 12A, 47-63Hz 200-240V~, 6.0A, 47-63Hz (Only for China and Korea)				
DC output	+5V	+3.3V	+12V	-12V	+5Vsb
	20.0A	20.0A	70.8A	0.3A	3.0A
	100W		849.6W	3.6W	15W
Total power	850W				

CONNECTORS


ATX (20+4 PIN)	EPS (8 PIN)	PCIe 5.1 (16 PIN)	PCIe (6+2 PIN)	SATA	PERIPHERAL (MOLEX)	FDD
1	2	1 (600w)	4	8	3	1

Power Supply Cable



1 x ATX Embossed Jacket Cable

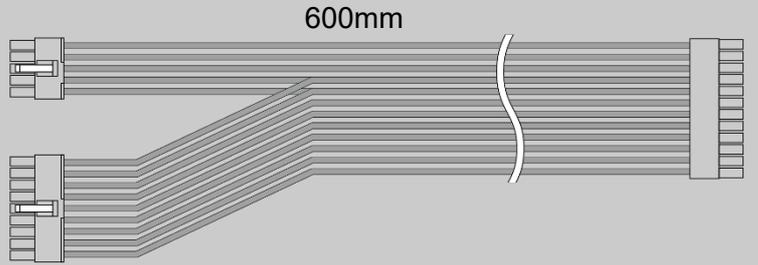


2 x EPS Embossed Jacket Cable

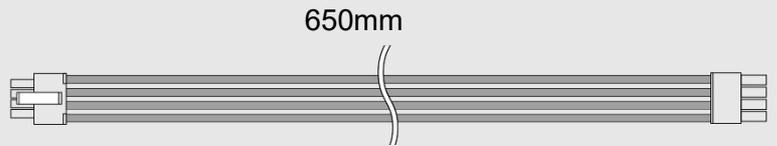


1 x PCIe 5.1 Embossed Jacket Cable

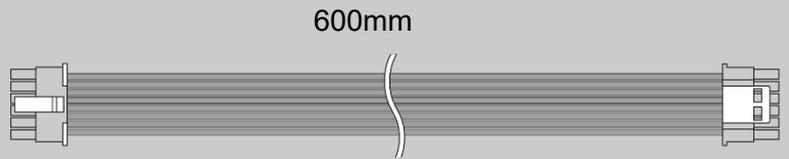


1 x 12V-2x6 to dual 8-pin Embossed Jacket Cable

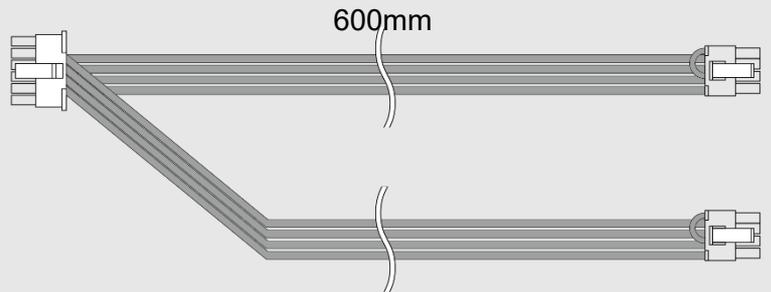


2 x PCIe Embossed Jacket Cable

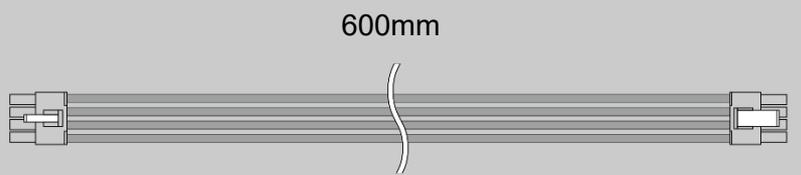

2 x SATA / PERIPHERAL Embossed Jacket Cable

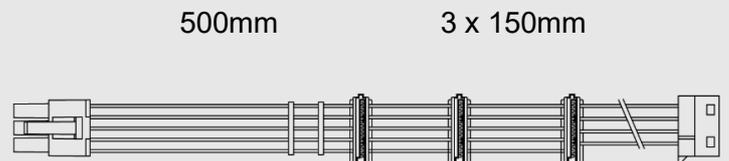

1 x SATA / PERIPHERAL / FDD Embossed Jacket Cable

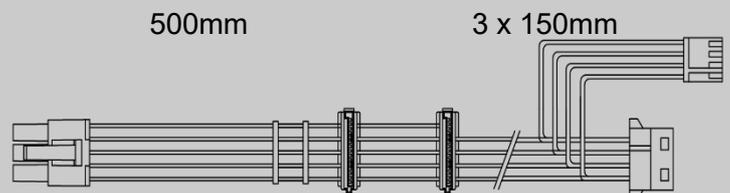

* Pre-installed Cable Organizer