




Sunrise Alarm Clock

AC-SCE60A

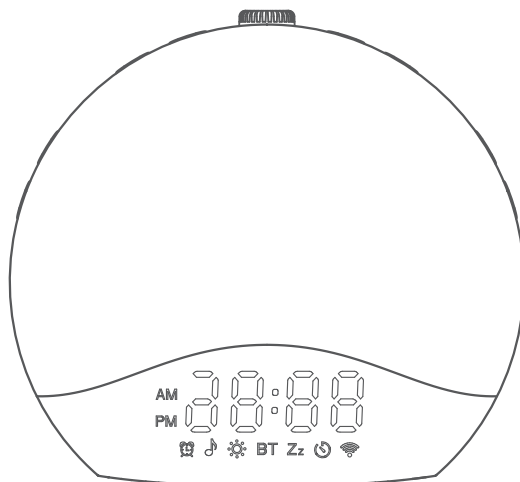

User Manual

Please read this manual carefully before use and keep it for future reference.

ENGLISH



Thank you for purchasing from easyera.
If you have any questions or need further assistance,
please contact us at
support@ecozy.com.

CONTENT

SAFETY INSTRUCTIONS	01
MAINTENANCE AND CARE	01
WHAT'S INCLUDED	02
PRODUCT OVERVIEW	02
GET STARTED	03
OPERATION	03
Time	04
Sunrise Light for Alarm	04
Alarm	04
Snooze	05
Operation When the Alarm Goes Off	05
Bluetooth	06
Sleep Music	07
Sleep Timer	07
Sunrise Light	08
Single-Color Light	08
RGB Ambient Light	08
Display Brightness	09
TROUBLESHOOTING	09
SPECIFICATIONS	09

SAFETY INSTRUCTIONS


To reduce the risk of fire, electric shock, or injury, please read these instructions before use.

1. This product is only intended for household use, including similar use in hotels.
2. Please place this product on a stable, level, and non-slippery surface.
3. Do not use this product in wet surroundings, such as in the bathroom, near a shower or a swimming pool.
4. Do not let the water run into the product or spill any water onto the product.
5. Make sure the power adapter does not get wet when in use.
6. Only use the ORIGINAL USB cable provided.
7. Do not use this product as a means of reducing your sleeping time. This product aims to help you wake up more easily instead of diminishing your need for sleep.
8. This alarm clock has a CR2032 battery, but it needs to stay plugged in to a power outlet to work properly. The battery is designed to save your settings when the clock is not connected to power.


MAINTENANCE AND CARE

1. Please clean the product with a damp and soft cloth.
2. Do not use abrasive cleaning agents, pads, or cleaning solvents like alcohol, acetone, etc., as this might damage the surface of the product.
3. If the product will not be used for an extended period of time, please unplug the power adapter from the socket, then store the product in a safe and dry place where it will not be crushed, banged, or subject to damage.


WHAT'S INCLUDED

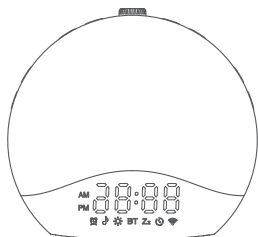


Sunrise Alarm Clock



Power Adapter






USB Charging Cable



User Manual

PRODUCT OVERVIEW

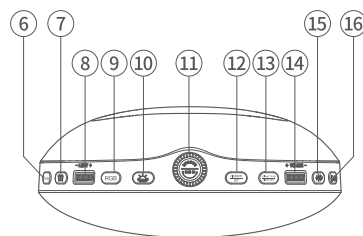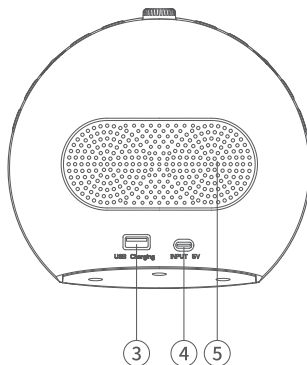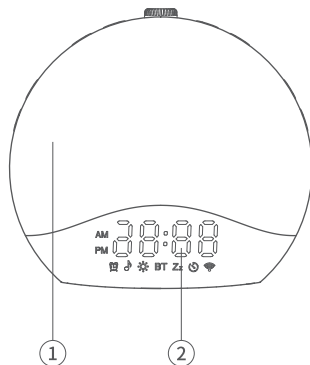


- ① Light
- ② Time Display
- ③ USB Charging Output
- ④ Power Input
- ⑤ Speaker
- ⑥ Sunrise Light Settings (For Alarm)
- ⑦ Alarm Settings
- ⑧ Light Brightness Adjustment
- ⑨ RGB Ambient Light
- ⑩ Sunrise Light/Single-Color Light
- ⑪ Snooze / Setting +/-
- ⑫ Time Display Brightness / Bluetooth Settings
- ⑬ Sleep Timer / Time Settings
- ⑭ Volume Adjustment
- ⑮ White Noise
- ⑯ Nature Sounds & Songs

GET STARTED

Connect the clock to 100-240V power with the provided charging cable and power adapter.

Tip:

This product has no power on/off button, and it will be on once you connect it to power. To disconnect the power, please unplug the product.

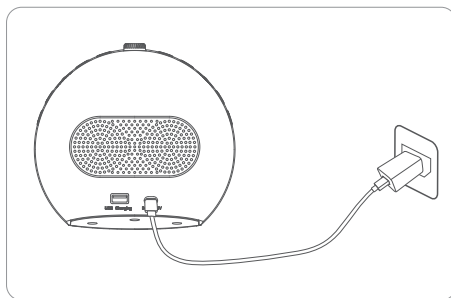




OPERATION

Note:







The clock will automatically save the current setting and exit from setting mode if the operation is not resumed within 15s (5s for sleep timer settings).

Time








Before the first use, please set the time.






- ① Press and hold  to enter time setting. You will see the flashing digits.
- ② Rotate  to adjust the year, month, date, hour format, hour and minute sequentially. Press  to move between settings and finalize the setup.

Sunrise Light for Alarm

- ① Press the  button to enter the sunrise light settings.
- ② Rotate  to set the maximum brightness (options: OFF, L01-L20).
- ③ Press the  or  button, and then rotate  to set the time to turn on the sunrise light before the alarm, ranging from 0 to 60 minutes. For example, setting it to 10 minutes means the light will turn on 10 minutes before the alarm goes off.
- ④ Press the  button to complete the setup.

Alarm






- ① Press and hold the  button to enter alarm settings. The hour digits will flash.
- ② Rotate  to set the hour, and then press  to proceed.
- ③ Rotate  to set the minute, and then press  to proceed.
- ④ Rotate  to select the alarm sound (S01-S22, OFF = disabled), and then press  to proceed.

- ⑤ Rotate  to set the volume of the alarm sound (V01-V16, V16 = loudest), and then press  to proceed.
- ⑥ Rotate  to set the alarm repeating cycle (1-7: Monday to Sunday; 1-5: Monday to Friday; 6-7: Saturday to Sunday), and then press  to complete the setup. The  indicator will show on the display.

Tip:

To enable/disable the alarm, press the  button once, and the  indicator will show up or disappear accordingly.

Snooze

- ① Press and hold  to enter snooze settings. You will see the flashing digit.
- ② Rotate  to set the snooze time (5 to 20 minutes), and then press  to proceed.
- ③ Rotate  to set if the sunrise light will be on during the snooze (OFF, ON), and then press  to complete the setup.


Operation When the Alarm Goes Off

When the alarm is set with the sunrise light, the light will turn on at the preset time and brighten gradually to the preset level like a sunrise. The alarm will also ring at the designated time. During the light-up or alarm ringing, you can perform the following operations:



Snooze when light-up:

When the sunrise light illuminates but the alarm still hasn't rung, press  to turn off the light. It will light up again when the alarm rings.

Snooze when alarm rings:

When the alarm is ringing, press  to activate snooze mode. Once the snooze duration ends, the alarm will ring again. You can repeat this process multiple times as there is no limit.

Stop current alarm:


When the alarm is ringing or in snooze mode, press  or press and hold  for 3 seconds to stop the current alarm. This will not affect the next alarm.

No operation:



If there is no operation for 30 minutes while the alarm is ringing, it will automatically stop.





Bluetooth

You can use the clock as a Bluetooth speaker.





- ① Press and hold  for 2 seconds to activate Bluetooth mode, indicating by a voice prompt “Bluetooth mode” and a flashing BT icon on the display.
- ② Go to the Bluetooth settings on your device and search for “E60A” to connect.
- ③ Wait for successful pairing, indicated by the voice prompt “Paired successfully” and a solid BT icon on the display.

☀ Tips:



- * The clock's time will be automatically calibrated after Bluetooth connection.
- * Press  to play or pause the music; rotate  to adjust the volume.

- * To switch to the previous or next song, simply rotate . Each notch skips to another song.
- * To disconnect Bluetooth connection, simultaneously press and hold   for 2 seconds; to disable Bluetooth mode, press and hold  for 2 seconds.



Sleep Music

- ① Press  to turn on white noise or  to turn on nature sounds/songs.
- ② Rotate  to switch among different music (white noise: N01-N11; nature sounds/songs: S01-S15).
- ③ Rotate  to adjust the volume.



Tip:

To turn off the sleep music, press and hold  or  for 3 seconds.

Sleep Timer


- ① Press  to enable the sleep timer. You will see the flashing digits.
- ② Rotate  to set the timer duration (options: 10-120, 180, 240, 300, 360, 420, and 480 MIN). The setting will be saved automatically.

Tips:

- * While the timer is running, you can freely turn on the sleep music, sunrise light or RGB ambient light, and they will automatically turn off when the timer ends.
- * While the timer is running, you can press  to check the remaining time.
- * To cancel the timer, press and hold  for 3 seconds.

Sunrise Light

① Press  to turn on the sunrise light.


② Rotate  to adjust its brightness.


 **Tip:**

To turn off the sunrise light, press  again.

Single-Color Light

① Press and hold  for 2 seconds to turn on the single-color light.


② Press  to cycle through different colors, including pink, green, blue, cyan, purple, white, red, and yellow.

③ Rotate  to adjust its brightness.

 **Tip:**

To turn off the single-color light, press and hold  for 2 seconds.

RGB Ambient Light

① Press  to turn on the RGB ambient light.

② Press  to cycle through different light modes. C09 can sync with Bluetooth music.

③ Rotate  to adjust its brightness.

 **Tip:**


To turn off the RGB ambient light, press and hold  for 2 seconds.

Display Brightness


Press  to adjust the brightness of the display (options: high, medium, low, very low and off).

TROUBLESHOOTING

1. How can I keep the light on while snoozing?

To keep the light on during snooze, press and hold the  button to enter snooze settings and set the sunrise light to **ON**.

2. How do I set the time and brightness for the sunrise light before the alarm?

Press the  button to enter the sunrise light settings. Then set the maximum brightness and adjust the time for the light to turn on before the alarm.

SPECIFICATIONS

Power Adapter	100-240V, 50Hz
Power Input	5V/2A
Dimensions	7.1 x 6.3 x 3.1 inches (180 x 160 x 78 mm)
Net Weight	450g
Operating Temperature	14°F-122°F (-10°C-50°C)

FCC CAUTION

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Note:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

ISED WARNING

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The device is compliance with RF exposure guidelines, users can obtain Canadian information on RF exposure and compliance. The minimum distance from body to use the device is 20cm.

L'appareil est conforme aux directives d'exposition aux RF, les utilisateurs peuvent obtenir des informations canadiennes sur l'exposition aux RF et la conformité. La distance minimale du corps pour utiliser l'appareil est de 20 cm.