

# Quick Start Guide

Wired Floodlight Camera

# Let's get started

- 1 Please scan QR code with your camera to watch this video and familiarize yourself with the installation process.



Or go to [arlo.com/install/wiredfloodlight](https://arlo.com/install/wiredfloodlight)

- 2 Download the Arlo Secure App and create an account or log in to your existing account.




Or go to [arlo.com/app/secure/](https://arlo.com/app/secure/)

- 3 In the app tap **Devices** and then ⊕ , select **Lights > Wired Floodlight Camera** and follow the prompts or this guide.

- 4 Grab your Phillips Screwdriver and a ladder.

# What's in the box



Wired Floodlight  
Camera



2x Mounting  
Bracket Screws  
(Bag A1)



2x Mounting  
Bracket Screws  
(Bag A2)



2x Mounting  
Bracket Screws  
(Bag A3)



1x Ground  
Screw (Bag B)



2x Wire Nuts  
(Bag C)




1x Floodlight  
Mounting Screw  
(Bag D)



1x Floodlight  
Mounting Screw Cap  
(Bag E)




1x S-Hook




1x Mounting Bracket

# Get to know your Arlo Floodlight

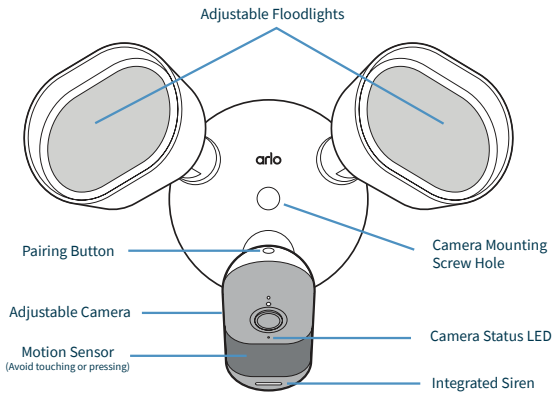

## Mounting Options



Wall Mount



Ceiling Mount




**WARNING:** Risk of electrical shock and fire. Do not install wired floodlight camera (“Fixture”) near combustible or flammable surfaces. **If you are not comfortable or are inexperienced with the installation of equipment requiring electrical connections, please hire a licensed electrician to install.**

- Always follow local building codes, standards, and regulations.
- Install on 4” round UL listed weatherproof electrical junction box. The junction box and existing electrical wires are required for Fixture installation.
- If you do not have a junction box then please retain a licensed electrician to install one.
- Disconnect power at the fuse or circuit breaker powering the Fixture before installing. Failure to disconnect power might result in serious injury.
- Verify supply voltage is correct. Connect Fixture to a 100 VAC~240 VAC 50/60 Hz power source.
- Properly ground Fixture.
- Do not connect the Fixture to a dimmer switch or timer.

# Installation steps


1



## Prepare for Installation

- Before starting, turn off power to the junction box at the breaker. Failure to do so may result in serious injury.
- Make sure there is no power to the existing fixture. Then, remove the existing fixture and mounting hardware from the junction box.


2



## Install Mounting Bracket

- Three bags of Mounting Bracket Screws are provided. Choose the pair of screws from either Bag A1, A2, or A3 that fit your junction box.
- Position included Mounting Bracket on the junction box with the word **FRONT** facing towards you and secure it with the two Bracket Screws.

3



## Use S-Hook


- Attach S-Hook to camera for support during installation. Camera and floodlights should be upside down and back of floodlight base should face the wall to avoid damaging camera surface.
- Attach other end of S-Hook to Mounting Bracket.



**WARNING:** Risk of electrical shock and fire. Do not install wired floodlight camera (“Fixture”) near combustible or flammable surfaces. **If you are not comfortable or are inexperienced with the installation of equipment requiring electrical connections, please hire a licensed electrician to install.**

- Always follow local building codes, standards, and regulations.
- Install on 4” round UL listed weatherproof electrical junction box. The junction box and existing electrical wires are required for Fixture installation.
- If you do not have a junction box then please retain a licensed electrician to install one.
- Disconnect power at the fuse or circuit breaker powering the Fixture before installing. Failure to disconnect power might result in serious injury.
- Verify supply voltage is correct. Connect Fixture to a 100 VAC~240 VAC 50/60 Hz power source.
- Properly ground Fixture.
- Do not connect the Fixture to a dimmer switch or timer.


4



## Connect Wires

- Partially insert ground screw from Bag B into the hole marked **GND**. Hook **GREEN** or **YELLOW-GREEN** (ground) wire from junction box around screw and tighten screw to clamp down **GREEN** or **YELLOW-GREEN** wire.
- Twist **BLUE** wire (neutral) from camera and **BLUE** wire from the junction box together clockwise using a wire nut from Bag C.
- Twist **BROWN** wire (hot) from camera and **BROWN** wire from junction box together clockwise using wire nut from Bag C.

5



## Complete Assembly

- Tuck all the wires into the junction box, ensuring wires do not overlap Mounting Bracket, and remove S-Hook.
- Rotate floodlight so lights are at the top and align the floodlight Mounting Screw Hole with the center hole of Mounting Bracket.
- Secure floodlight to Mounting Bracket by inserting and tightening Floodlight Mounting Screw from Bag D.
- Place Floodlight Mounting Screw Cap from Bag E over the Mounting Screw to keep water out of the enclosure.



## Restore Power and Onboard Floodlight

- Turn power back on at the breaker.
- You'll know your floodlight is receiving power when the LED on the front of the camera is solid blue.
- Open the Arlo Secure App, tap **Devices** and then ⊕, and select **Lights > Wired Floodlight Camera** and follow the prompts to finish setting up the floodlight.

## Need help?

We are here for you.

Visit [arlo.com/support](https://www.arlo.com/support) for:

- Quick answers
- How-to videos
- Troubleshooting tips
- Additional support resources



# Total protection starts with Arlo Secure.

Arlo Secure plan trial is included with purchase. A paid plan after trial is required to keep premium features.

Visit [arlo.com/arlosecure](https://arlo.com/arlosecure) to learn more about premium features:

- 30-Day Video Recordings in Secure Cloud
- Smart Interactive Notifications
- Advanced Object Detection
- Smart Activity Zones

© Arlo Technologies, Inc. Arlo, Arlo logo, and Every Angle Covered are trademarks of Arlo Technologies, Inc. App Store is a service mark of Apple Inc. Google Play and the Google Play logo are trademarks of Google LLC. Any other trademarks are for reference purposes.

For regulatory compliance information including the EU Declaration of Conformity, visit **[www.arlo.com/about/regulatory/](http://www.arlo.com/about/regulatory/)**.

© Arlo Technologies, Inc. Arlo, le logo Arlo et Every Angle Covered sont des marques de commerce d'Arlo Technologies, Inc. App Store est une marque de service d'Apple Inc. Google Play et le logo Google Play sont des marques de commerce de Google LLC. Toute autre marque de commerce n'est utilisée qu'à titre de référence.

Pour obtenir des renseignements sur la conformité, y compris la déclaration de conformité de l'UE, visitez **[www.arlo.com/about/regulatory/](http://www.arlo.com/about/regulatory/)**.

© Arlo Technologies, Inc. Arlo, el logotipo de Arlo y Every Angle Covered son marcas comerciales de Arlo Technologies, Inc. App Store es una marca de servicio de Apple Inc. Google Play y el logotipo de Google Play son marcas comerciales de Google LLC. Cualquier otra marca comercial se utiliza solo con fines de referencia.

Para obtener información sobre el cumplimiento de normativas, incluida la declaración de conformidad de la Unión Europea, visite **[www.arlo.com/about/regulatory/](http://www.arlo.com/about/regulatory/)**.

CAN ICES (B) / NMB (B)



Arlo Technologies Intl. Ltd  
Ground Floor, Building 3  
University Technology Centre  
Curraheen Road, Cork T12 EF21 Ireland

Arlo Technologies UK Limited  
280 Bishopsgate  
London, EC2M 4RB

Arlo Technologies, Inc.  
2200 Faraday Avenue, Suite 150  
Carlsbad, CA 92008 USA

June 2024



201-50789-01