

FISHER & PAYKEL

SPECIFICATION GUIDE

INTEGRATED DISHWASHER, 24" PANEL READY



OVERVIEW

This panel ready built-in dishwasher provides seamless integration into your kitchen design. It fits a variety of cabinetry panels and suits both standard cabinet height and ADA compliant installations. The high-specification model DW24U6I1 also features interior LED lighting, a third rack, a quieter motor and Sanitize and Extra Dry options.

MODELS

Integrated Dishwasher, 24", Panel Ready
DW24U6I1

Integrated Dishwasher, 24", Panel Ready
DW24U2I1

ACCESSORIES

①	Handle D5 AL - Square Fine	AHD5-OBDD-60SX
②	Handle D3 AL - Square	AHD5-OBDD-60S
③	Handle R1 AL - Round	AHS-OBDD-60S
④	Handle P1 SS - Pro Square	AHV2-DD24 N
⑤	Handle P2 SS - Pro Round	AHP2-DWDD-SX
⑥	Handle P3 SS - Pro Round Flush	AHP3-DWDD-SX
⑦	Stainless steel door standard install	ACC DOOR DW T
⑧	Stainless steel door ADA install	ACC DOOR DW

FEATURES

- ① Top door control interface
- ② Energy efficient: Energy Star
- ③ Wash cycles for any load, from rinse to heavy
- ④ Quiet performance*
- ⑤ Easy to load
- ⑥ Bright interior LED lighting**
- ⑦ Third rack for cutlery and utensils**
- ⑧ Height adjustable middle rack to allow for large plates or long-stemmed glasses in bottom rack**
- ⑨ Fold-down and pitch adjustable racking, incl. wine glass holders**
- ⑩ Sanitize and Extra Dry wash modifiers**

*46dBa or less for DW24U6I1 and 48dBa or less for DW24U2I1.
**DW24U6I1 only.

FISHER & PAYKEL

SPECIFICATION GUIDE


INTEGRATED DISHWASHER, 24" ADA CUSTOM DOOR PANEL

SPECIFICATIONS

Model No.	DW24U6I1, DW24U2I1
Dimensions	H 32 5/16 - 34 5/8" (821-880mm) x W 23 3/4" (603mm) x D* 22 3/4" (579mm)
Door Clearance**	23 7/8" (606mm)
Weight	92lb (45kg)
Internal Capacity	14 place settings (DW24U6I1), 12 place settings (DW24U2I1)
Electrical	
Supply	120VAC, 60Hz, 8.9A
Service	10-amp circuit

*Measured from the front of product, excl. the custom door panel or handle.
**Depth of door (widest opening) measured from front of product.


PLUMBING AND ELECTRICAL

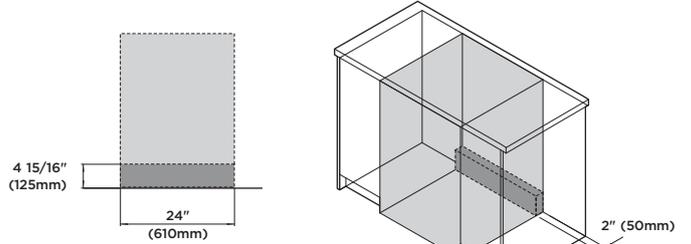


SERVICE OUTLET AT REAR EXTENDS BOTH SIDES, HOSES AND CORDS CAN BE ROUTED TO EITHER OR BOTH.

REAR OF CAVITY

PRODUCT DIMENSIONS

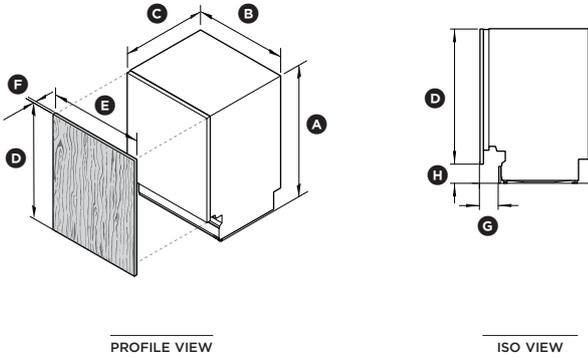

CAVITY DIMENSIONS: ADA INSTALLATION

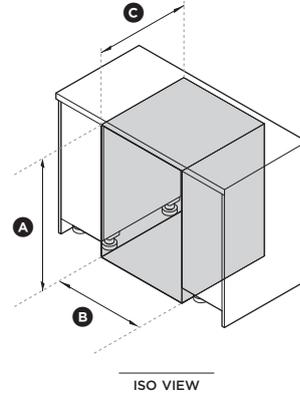

		in	mm
(A)	Overall height	min 32 5/16 max 34 5/8	min 821 max 880
(B)	Overall width*	23 3/4	603
(C)	Overall depth**	22 3/4	579
(D)	Height of door custom panel	26 1/2 - 28 1/4	674 - 717
(E)	Width of door custom panel	23 7/16 - 23 13/16	596 - 605
(F)	Depth of door custom panel	5/8 - 3/4	16 - 19
(G)	Depth of toe kick***	max 4	max 102
(H)	Height from floor to bottom of custom panel	4 - 8	100 - 200

Note: Toe kick panel to be manufactured and fitted by cabinetmaker (can be panel or continuous).
*Excl. side seals.
**Excl. the custom door panel or handle, to be manufactured and fitted by cabinetmaker.
***Relies on 3/4" (19mm) custom door panel and 3/8" (10mm) toe kick panel to meet this measurement.

		in	mm
(A)	Overall height of cavity	min 32 3/8 max 34 5/8	min 822 max 880
(B)	Overall width of cavity*	24	610
(C)	Overall depth of cavity (incl. 3/4" [19mm] custom panels)	24	610

*Side seals accommodate this cavity width range.

FISHER & PAYKEL

SPECIFICATION GUIDE


INTEGRATED DISHWASHER, 24" ADA, STAINLESS STEEL ACCESSORY DOOR PANEL (82085)

SPECIFICATIONS

Model No.	DW24U6I1, DW24U2I1
Dimensions	H 32 5/6 - 34 5/8" (821-880mm) x W 23 3/4" (598mm) x D* 22 3/4" (579mm)
Door Clearance**	23 7/8" (606mm)
Weight	92lb (45kg)
Internal Capacity	14 place settings (DW24U6I1), 12 place settings (DW24U2I1)
Electrical	
Supply	120VAC, 60Hz, 8.9A
Service	10-amp circuit

*Measured from the front of product, excl. the accessory door panel or handle.
**Depth of door (widest opening) measured from front of product, excl. the accessory door panel or handle.


PLUMBING AND ELECTRICAL

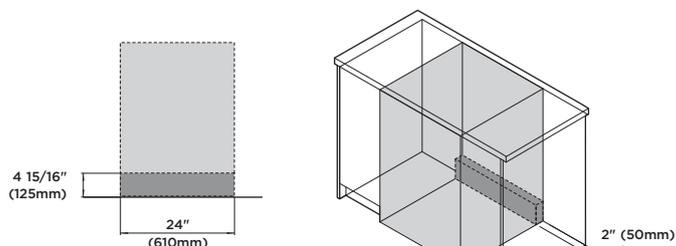


SERVICE OUTLET AT REAR EXTENDS BOTH SIDES, HOSES AND CORDS CAN BE ROUTED TO EITHER OR BOTH.

REAR OF CAVITY

PRODUCT DIMENSIONS

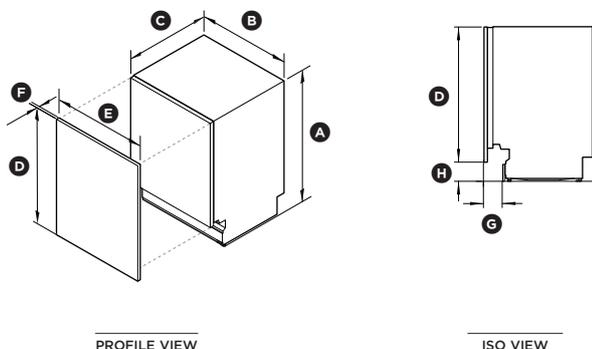

CAVITY DIMENSIONS: ADA INSTALLATION

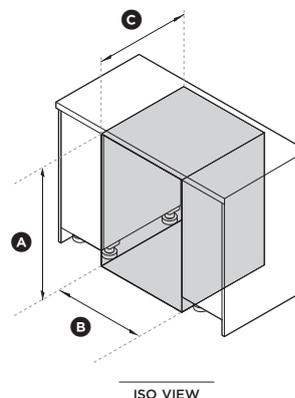

		in	mm
(A)	Overall height	min 32 5/16 max 34 5/8	min 821 max 880
(B)	Overall width*	23 3/4	603
(C)	Overall depth**	22 3/4	579
(D)	Height of accessory door	28 1/8	714
(E)	Width of accessory door	23 7/16	595
(F)	Depth of accessory door	3/4	19
(G)	Depth of toe kick***	max 4	max 102
(H)	Height from floor to bottom of accessory door panel	4-6 3/8	100-160

Note: Toe kick panel to be manufactured and fitted by cabinetmaker (can be panel or continuous).
*Excl. side seals.
**Excl. the accessory door panel or handle, to be manufactured and fitted by cabinetmaker.
*** Relies on 3/4" (19mm) accessory door panel and 3/8" (10mm) toe kick panel to meet this measurement.

		in	mm
(A)	Overall height of cavity	min 32 3/8 max 34 5/8	min 822 max 880
(B)	Overall width of cavity*	24	610
(C)	Overall depth of cavity (incl. 3/4" [19mm] accessory door panel)	24	610

*Side seals accommodate this cavity width range.

FISHER & PAYKEL

SPECIFICATION GUIDE


INTEGRATED DISHWASHER, 24" STANDARD CUSTOM DOOR PANEL

SPECIFICATIONS

Model No.	DW24U6I1, DW24U2I1
Dimensions	H 34-36 1/2" (864-927mm) x W 23 3/4" (603mm) x D* 22 3/4" (579mm)
Door Clearance**	25 5/8" (651mm)
Weight	92lb (45kg)
Internal Capacity	14 place settings (DW24U6I1), 12 place settings (DW24U2I1)
Electrical	
Supply	120VAC, 60Hz, 8.9A
Service	10-amp circuit

*Measured from the front of product, excl. the custom door panel or handle.
**Depth of door (widest opening) measured from front of product, excl. the custom door panel or handle, to be manufactured and fitted by cabinetmaker.


PLUMBING AND ELECTRICAL

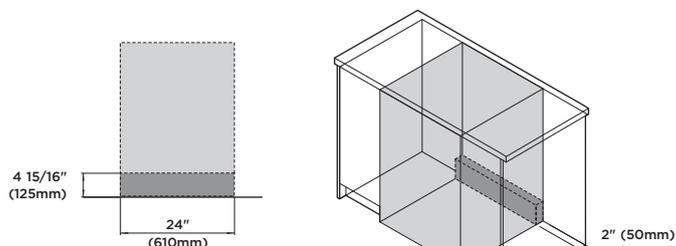


SERVICE OUTLET AT REAR EXTENDS BOTH SIDES, HOSES AND CORDS CAN BE ROUTED TO EITHER OR BOTH.

REAR OF CAVITY

PRODUCT DIMENSIONS

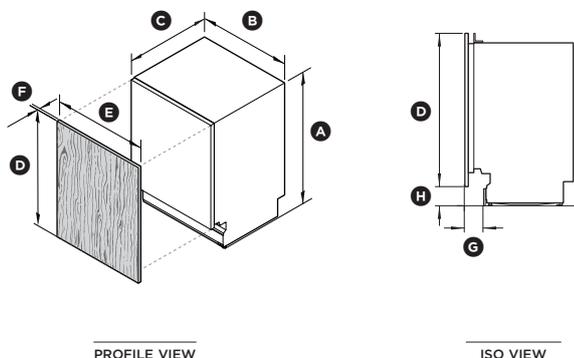

CAVITY DIMENSIONS: STANDARD INSTALLATION

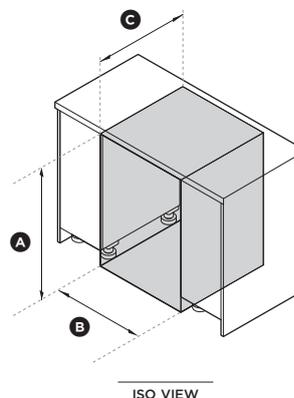

		in	mm
(A)	Overall height	min 34 max 36 1/2	min 864 max 927
(B)	Overall width*	23 3/4	603
(C)	Overall depth**	22 3/4	579
(D)	Height of custom door panel***	28 1/4-30 1/4	717-769
(E)	Width of custom door panel	23 7/16-23 13/16	596-605
(F)	Depth of custom door panel	5/8-3/4	16-19
(G)	Depth of toe kick****	max 4	max 102
(H)	Height from floor to bottom of custom panel	4-8	100-200

Note: Toe kick panel to be manufactured and fitted by cabinetmaker (can be panel or continuous).
*Excl. side seals.
**Excl. the custom door panel or handle, to be manufactured and fitted by cabinetmaker.
***Custom door panel heights above 29 7/8" (758mm) require cavity size greater than 34" (864mm).
****Relies on 3/4" (19mm) custom door panel and 3/8" (10mm) toe kick panel to meet this measurement.

		in	mm
(A)	Overall height of cavity	min 34 max 36 1/2	min 864 max 927
(B)	Overall width of cavity*	24	610
(C)	Overall depth of cavity (incl. 3/4" [19mm] custom panels)	24	610

*Side seals accommodate this cavity width range.
Note: For taller installations an infill bracket will be supplied to cleanly cover gap between top of DW to benchtop.

FISHER & PAYKEL

SPECIFICATION GUIDE


INTEGRATED DISHWASHER, 24" STANDARD STAINLESS STEEL ACCESSORY DOOR PANEL (82084)

SPECIFICATIONS

Model No.	DW24U6I1, DW24U2I1
Dimensions	H 34-36 1/2" (864-927mm) x W 23 3/4" (603mm) x D* 22 3/4" (579mm)
Door Clearance**	25 5/8" (651mm)
Weight	92lb (45kg)
Internal Capacity	14 place settings (DW24U6I1), 12 place settings (DW24U2I1)
Electrical	
Supply	120VAC, 60Hz, 8.9A
Service	10-amp circuit

*Measured from the front of product, excl. the accessory door panel or handle.
**Depth of door (widest opening) measured from front of product, excl. the accessory door panel or handle.


PLUMBING AND ELECTRICAL

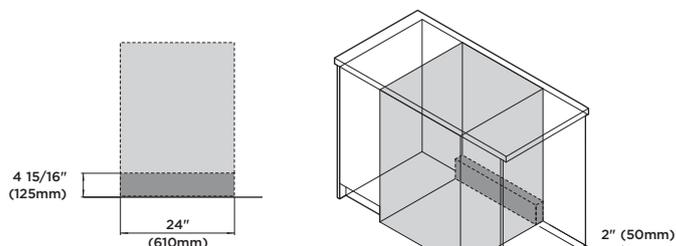

SERVICE OUTLET AT REAR EXTENDS BOTH SIDES, HOSES AND CORDS CAN BE ROUTED TO EITHER OR BOTH.

REAR OF CAVITY

PRODUCT DIMENSIONS

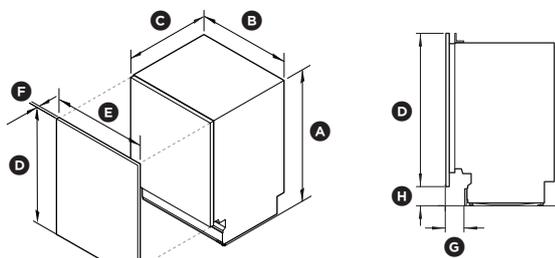


PROFILE VIEW

ISO VIEW

		in	mm
(A)	Overall height	min 34 max 36 1/2	min 864 max 927
(B)	Overall width*	23 3/4	603
(C)	Overall depth**	22 3/4	579
(D)	Height of accessory door	29 3/4	756
(E)	Width of accessory door	23 7/16	595
(F)	Depth of accessory door	3/4	19
(G)	Depth of toe kick***	max 4	max 102
(H)	Height from floor to bottom of accessory door panel	4-6 3/8	100-160

Note: Toe kick panel to be manufactured and fitted by cabinetmaker (can be panel or continuous).
*Excl. side seals.
**Excl. the accessory door panel or handle.
***Relies on 3/4" (19mm) accessory door panel and 3/8" (10mm) toe kick panel to meet this measurement.

CAVITY DIMENSIONS: STANDARD INSTALLATION

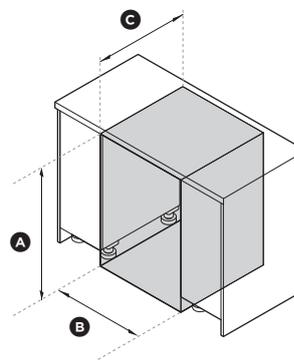

ISO VIEW

		in	mm
(A)	Overall height of cavity	min 34 1/3 max 36 1/2	min 872 max 928
(B)	Overall width of cavity*	24	610
(C)	Overall depth of cavity (incl. 3/4" [19mm] accessory door panel)	24	610

*Side seals accommodate this cavity width range.
Note: for taller installations an infill bracket will be supplied to cleanly cover gap between top of DW to benchtop.