

OWNER'S MANUAL

& INSTALLATION INSTRUCTIONS



MODEL 217 (217A12 / 217B12 / 217C12 / 217D12 / 217E12)
MONUMENT PHOTO MANAGEMENT DEVICE

217-US-ENG-REV01

www.getmonument.com



WARRANTY

FULL 1-YEAR WARRANTY

If this product fails due to a defect in material or workmanship within one year from the date of purchase, Monument Labs will at its option repair or replace it free of charge. Shipping costs are not covered.

WARRANTY RESTRICTIONS

There are no customer-serviceable parts inside this device. Do not attempt to repair this unit yourself. Doing so may void the warranty and can cause damage to the device or personal injury to yourself.

This warranty applies only while this product is in use in the United States. This warranty gives you specific legal rights, and you may also have other rights depending on your state of residence. For additional Monument Labs warranty information, please visit our web site at www.getmonument.com/warranty.

Keep these instructions and your sales receipt for future reference.

Copyright © 2016 Monument Labs, Inc.
www.getmonument.com

605 N. Michigan Ave., 4th Floor
Chicago, IL 60611

ELECTRICAL REQUIREMENTS

In the United States, a 115 V, 60 Hz AC-only electrical supply is required. The included power supply can operate between 100-240 V AC, and provides 5 V DC power to the device with sufficient power to simultaneously operate two USB-based external portable drives (not included). The power provided for each drive is limited to 500 mA. If your external portable drive requires more power, you will need to externally power it per its manufacturer's instructions and recommendations.

FCC NOTICE (USA)

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provided with antenna installation instructions and transmitter operating conditions for satisfying RF exposure compliance.

IC NOTICE (CANADA)

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device. Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : [1] l'appareil ne doit pas produire de brouillage, et [2] l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

To maintain compliance with the RF exposure guidelines, place the unit at least 20cm from nearby persons.

Mise en garde: Pour assurer la conformité aux directives relatives à l'exposition aux fréquences radio, le jouet doit être placé à au moins 20cm des personnes à proximité.

SAFETY REQUIREMENTS

IMPORTANT SAFETY INSTRUCTIONS

WARNING:

1. Do not immerse the device in water or other liquids.
2. Do not use the device near water or in damp locations such as near bathtubs or a wet basement.
3. Do not use the device if the power supply has been damaged.
4. Do not use a power supply other than the one provided by Monument Labs.
5. Do not insert foreign objects into the device.
6. Do not use the device if it malfunctions or has been damaged. Return the device to the manufacturer for examination, electrical, or mechanical repairs. See WARRANTY section.
7. Do not block air vents, or place the device on a soft surface such as a bed or a sofa as this can block vent openings. Do not place objects on top of the device as this can also block vent openings.
8. Do not store external portable drives in the drive storage bay if any of the drives are externally-powered or damaged.

SAFETY REQUIREMENTS

9. Do not store anything other than a maximum of two external portable drives in the drive storage bay.
10. Do not move or relocate the device unless all external portable drives in the drive bay are disconnected and removed first per instructions in the OPERATION section.

Place the device on a flat, level surface at least 24 inches (61 cm) away from heat sources such as ranges or space heaters.

This product is intended for indoor use only. Save these instructions.



OPERATION

INITIAL SETUP

1. Make sure the device is unplugged from power.
2. If you'd like to use a gigabit Ethernet connection (only for models with an Ethernet port), connect the device to an Ethernet switch using a CAT6 Ethernet cable. Ethernet cables of a lower standard than CAT6 may result in a lower speed connection.
3. If desired, connect the device to a computer monitor or a TV using the HDMI port.
4. Attach one or two USB 2.0 external 2.5" portable drives to the device. (Note: USB 3.0 drives can also be used. However, they will operate at USB 2.0 speeds.)
5. Turn the device on by plugging in the power. The device will power on in less than a minute and the light in front will start blinking blue.
6. Install the Monument app on your smartphone or tablet. Go to www.getmonument.com/apps to find the right app for your mobile device. Install and launch the app, and follow the instructions.

OPERATION

STORING YOUR PHOTOS ON MONUMENT

1. Photos from your smartphone or tablet can be automatically transferred when you start using Monument apps.
2. Insert the SD card from your digital camera to automatically import all of your content.
3. All of the new content will be analyzed and organized by the device.



OPERATION

LED INDICATOR

Your Monument device has an indicator light in front. It allows you to check its status at a quick glance.

Solid White: Idle, functioning normally.

Blinking White: Processing content.

Blinking Blue: User action required, please check your mobile app.

Blinking Green: Importing content from SD card.



OPERATION

NORMAL OPERATION

1. SD cards can be plugged in and removed while the light in the front is white.
2. The device can be powered down by disconnecting the power when the light is solid white.
3. New external portable drives can be added either when the device is powered on, or when off. As soon as a new drive is plugged in, an alert will be shown on the mobile app. You can choose to make it a backup drive or use it to expand your current storage space.
4. To remove USB drives, please open the mobile app and go to the Settings screen. Select the drive you want to remove and follow the instructions. Removing a drive without following these steps may cause data loss or damage to your drives.



PRODUCT INFORMATION

SPECIFICATIONS

Operating temperature: 5°C to 35°C (41°F to 95°F)

Operating humidity: 25% to 80% relative humidity, non-condensing

Power consumption: 12 Watts

Maximum USB current: 500 mA per each attached device


Maximum external portable drive capacity: 2

Maximum external portable storage dimensions for drive bay:
20mm (3/4") Height x 83mm (3-1/4") Width x 120mm (4-3/4") Depth

LEGAL

By using your Monument device, you agree to our Terms of Use and Privacy Policy, use limitations, and liability limitations. Please visit www.getmonument.com/terms to review our terms. Additional information about product safety, regulations, and legal notices can be found at www.getmonument.com/legal.

TROUBLESHOOTING

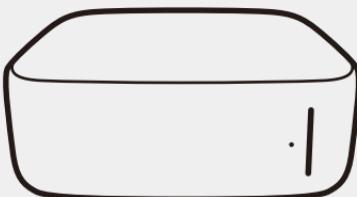

If the device is not functioning as expected, please check the front light:

Red: Firmware or hardware error. Visit www.getmonument.com/troubleshooting.

Blinking Blue: The device requires user attention. Follow the instructions on the mobile app.

No Light: Check if the power supply is connected to a wall outlet and to the device.

For additional support visit www.getmonument.com/support.



MONUMENT®

V	Volt	A	Ampere
W	Watt	—	Direct Current (DC)
	Product complies with the European Safety Regulations		For indoor use only
Environmentally friendly disposal			
		Old electrical appliances must not be disposed together with the residual waste, but have to be disposed of separately. The disposal at the communal collecting point via private persons is for free. The owner of old appliances is responsible to bring the appliances to these collecting points or to similar collection points. With this little personal effort, you contribute to recycle valuable raw materials and the treatment of toxic substances.	

www.getmonument.com

605 N. Michigan Ave., 4th Floor
Chicago, IL 60611

Copyright © 2016 Monument Labs, Inc.