

KM 7730 FR

30-inch induction cooktop, operated with its own controls
with 4 round cooking zones



- Intuitive quick selection via number sequences – Smart Select
- Versatile – 4 cooking zones, 1 extra large with diameter of 11 in
- With a width of 30 5/8 (775) in (mm) and stainless steel frame for proud-mounting
- Shortest heating-up times – TwinBooster
- Communication with the ventilation hood – automatic Con@ctivity function

EAN: 4002516611493 / Material number: 12074200 /
Old Material Number: 26773000USA

Heating type	
Fuel type	Induction
Design	
Independent of oven	•
Design	
Elegant glass ceramic surface	•
Ceramic surface color	Black
All-round stainless-steel frame	•
Proud installation	•
Cooking zone details	
No. of rings	4
Number of cooking areas	0
Maximum number of pans	4
1st cooking zone/cooking area	
Position	front left
Type	Variable cooking zone
Size in mm	Ø 180-280
Max. Booster power rating in W	3000
Max. rating in W	2600
Max. TwinBooster power rating in W	3700
2nd cooking zone/cooking area	
Position	rear left
Type	Variable cooking zone
Size in mm	Ø 100-160
Max. Booster power rating in W	1700
Max. rating in W	1400
Max. TwinBooster power rating in W	2200
3rd cooking zone/cooking area	
Position	rear right
Type	Variable cooking zone
Size in mm	Ø 140-190
Max. Booster power rating in W	2500
Max. rating in W	1850
Max. TwinBooster power rating in W	3000
4th cooking zone/cooking area	
Position	front right
Type	Variable cooking zone
Size in mm	Ø 140-190
Max. Booster power rating in W	2500
Max. rating in W	1850
Max. TwinBooster power rating in W	3000
User convenience	
Networking with Miele@home	•
Automatic function	Con@ctivity 3.0
Pan and pan size recognition	•
Operation via touchpad sensors	Smart Select
Display color	Yellow
Permanent pan recognition	•

KM 7730 FR

30-inch induction cooktop, operated with its own controls
with 4 round cooking zones




EAN: 4002516611493 / Material number: 12074200 /
Old Material Number: 26773000USA

Stop & Go function	•
Wipe protection	•
Recall function	•
Minute minder	•
Automatic switch-off for all rings	•
AutoBoost	•
Keep-warm function	•
Individual setting options (e.g. acoustic signal tones)	•
Cleaning convenience	
Easy to clean ceramic glass	•
Safety	
Safety cut-out	•
Lock function	•
System lock	•
Integrated cooling blower	•
Overheating protection	•
Residual heat indicator	•
Technical data	
Dimensions (width) in in. (mm)	30 5/8 (775)
Dimensions (height) in in. (mm)	3 1/8 (78)
Dimensions in mm (depth)	21 1/2 (544)
Cutout dimensions (width) in in. (mm)	724
Cutout dimensions (depth) in in. (mm)	518
Casing height incl. connection box in mm	2 7/8 (71)
Weight in lbs. (kg)	37 (17)
Total connected load in kW	6.60-7.60
Power cord length in in. (m)	3 (1.2)
Voltage in V	208-240
Frequency in Hz	50-60
Standard accessories	
Power cord	Yes

KM 7730 FR

30-inch induction cooktop, operated with its own controls
with 4 round cooking zones

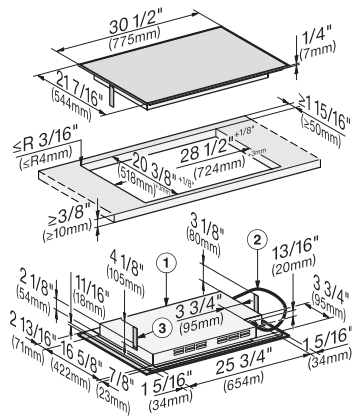

KM7730FR – with frame, surface mounted overlying
installation (*footnote) – drawing

1 Front, 2 Flexible metal hose with power cords, L=4'
(1,200 mm), 3 Spacer plate (only required if a protective
base is installed)