

MANUFACTURER LIMITED LIFETIME WARRANTY

This warranty offered by Fleximounts covers defects in material or workmanship in new Fleximounts products. This warranty extends to the original purchaser only and is non-transferable. Only consumers purchasing Fleximounts products from authorized Fleximounts retailers or resellers may benefit from our limited warranty.

What is covered?

For the lifetime of the product, Fleximounts will replace the defective product or parts only if the product is installed, operated and maintained according to instructions and if the product or part fails as a result of defective materials or workmanship.

What is not covered?

- Service calls for any reason, including installation, correcting installation, or instructing installation of any Fleximounts product.
- Repair or replacement needed due to accident, misuse, abuse, fire, flood, improper installation, neglect, corrosion, modification, or handling in any way inconsistent with the installation instructions.
- Any loss of or damage to other belongings due to accident, misuse, abuse, fire, flood, improper installation, neglect, corrosion, modification, or handling in any way inconsistent with the installation instructions.
- Repair or replacement for any product is used in any scenario other than normal, single-family household use, such as a commercial environment.
- Products damaged by loading beyond the specified maximum loading capacity of the product.
- Cosmetic damage that does not affect the functional or structural ability of the product, including scratches, dents, or cracks in paint.
- Replacement parts needed outside of the United States.
- Shipping or freight fees to return defective products or deliver replacements.
- Any labor costs.

Implied Warranties and Limitation of Damages

EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, ALL IMPLIED WARRANTIES (INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE) SHALL BE LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY, AND FLEXIMOUNTS SHALL NOT BE LIABLE FOR ANY INCIDENTAL, INDIRECT, SPECIAL, OR CONSEQUENTIAL DAMAGES, INCLUDING BUT NOT LIMITED TO LOSS OF PROFITS OR REVENUE, RESULTING FROM ANY BREACH OF EXPRESS OR IMPLIED WARRANTY OR CONDITION, OR UNDER ANY OTHER LEGAL THEORY, EVEN IF FLEXIMOUNTS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Some jurisdictions do not allow limitations on the duration of an implied warranty or the exclusion or limitation of special, indirect, incidental or consequential damages, so the above limitations or exclusions may not apply to you.

Governing Law


This Warranty shall be governed by the laws of the State of California, USA, without giving effect to any conflict of laws principles that may provide the application of the law of another jurisdiction.

How State Law Applies

This Warranty gives you specific legal rights, and you may also have other rights which vary from state to state.




Item No. GR48/GR48B/GR48NC  
Installation Guide

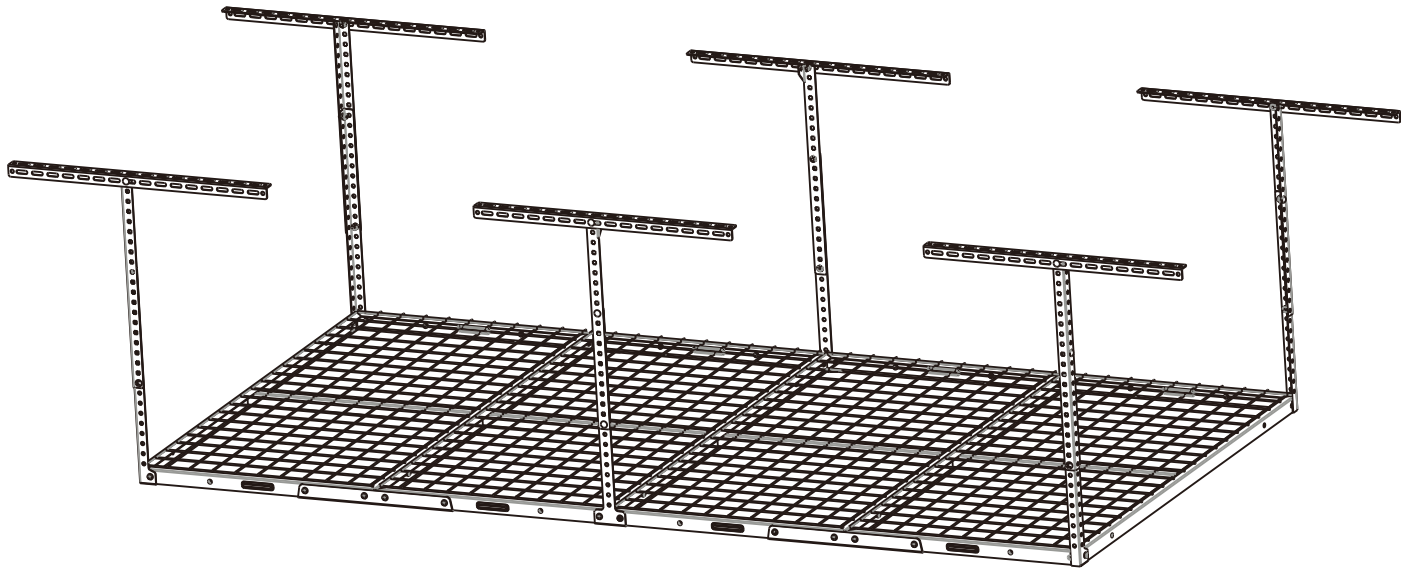








ATTENTION:

Is your product damaged?  
Need help or spare parts?  
For fastest service,  
contact Fleximounts at 1-855-421-2808;  
or [contact@fleximounts.com](mailto:contact@fleximounts.com)  
Do not return the product directly.









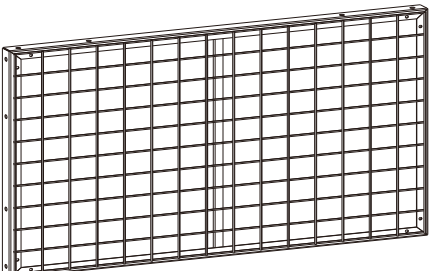


# Package Contents


## (A) Parts Included

	 x4  x2	 x4  x2	 x4	 x4
Ceiling Bracket x6	2a. L-Shaped Upper Vertical Post x4  2b. Upright Upper Vertical Post x2	3a. L-Shaped Lower Vertical Postx4  3b. Upright Lower Vertical Post x2	Connecting Plate x4	Wire Grid x4


## (B) Screw Set

								
St8.0 x 60 Tapping Screw (12 pcs/pack)	M8 x 15 mm Bolt (12 pcs/pack)	M8 Nut (12 pcs/pack)	Socket Wrench (1 pc)	5x5 mm Hex Key (1 pc)	M8 x 15 mm Bolt (6 pcs/pack)	M8 Nut (6 pcs/pack)	M8 x 10 mm Bolt (28 pcs/pack)	M8 x 10 Bolt (8 pcs/pack)


## (C) Tools Needed for Assembly




Pencil




Cordless Power Drill



Tape Measure




Stud Finder



Ladder



Safety Glasses



Screw Driver



Wrench

Note: To fast the installation, we recommend to use electrical drill for tightening the screws and bolts.

## SAFETYWARNING


This product contains small items that could be a choking hazard if swallowed. Keep these items away from young children.

- Make sure these instructions are read and completely understood before attempting installation. If you are unsure of any part of this installation, please contact a professional installer for assistance.
- The ceiling must be capable of supporting the combined weight of the garage rack and your stuff. Otherwise, the structure and weight capacity of the ceiling must be reinforced.
- Proper tools must be used. A minimum of two people are required for this installation. Failure to install properly can result in property damage or serious injury.
- Check joint parts every two months, making sure the screws have not loosened.
- This product is designed to be installed on a wooden ceiling or solid concrete ceiling. Before installation, make sure that the weight capacity of the ceiling will support the combined load of the rack and your stuff. Never exceed the maximum load capacity of the product 600 lbs (270 kg), or else it may result in product damage or physical injury.


Note: This product is intended for indoor use only. Use of this product outdoors could lead to product damage or physical injury.

Fleximounts Installation Overview


**A** Plan your Fleximounts ceiling rack installation location, determine orientation and verify spacing of joists. (Page 04)

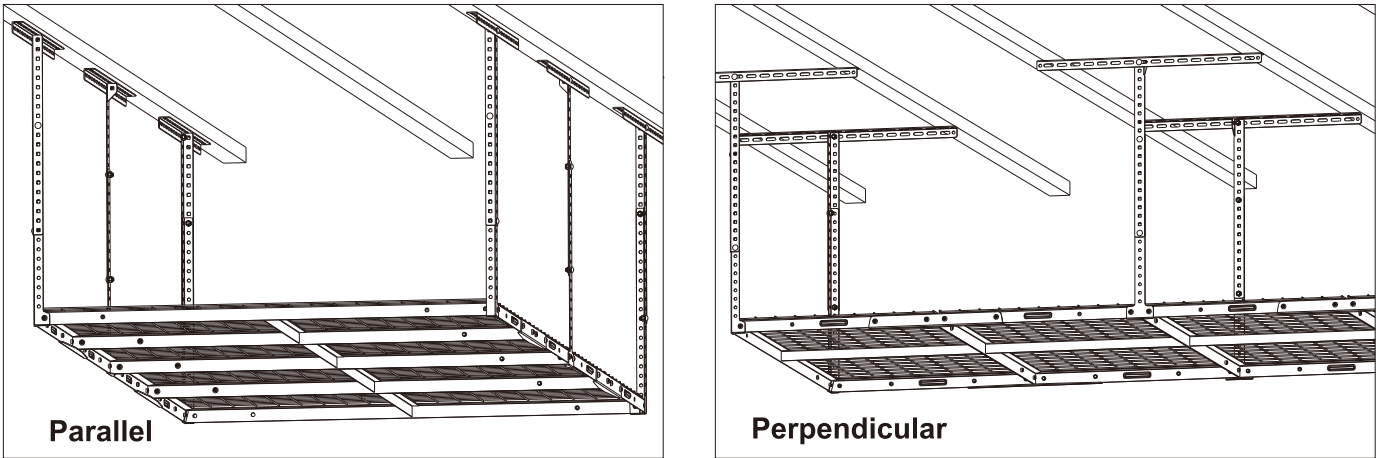


**B** Install ceiling brackets (Page 05-08)

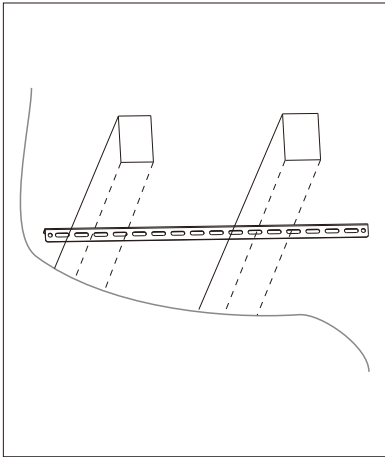


**C** Assemble the vertical posts (Page 09)

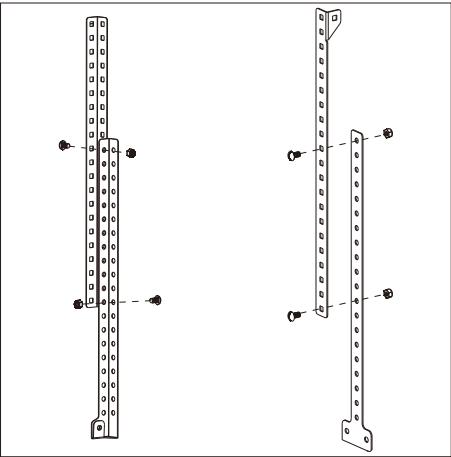


**D** Attach vertical posts to ceiling brackets (Page 10)

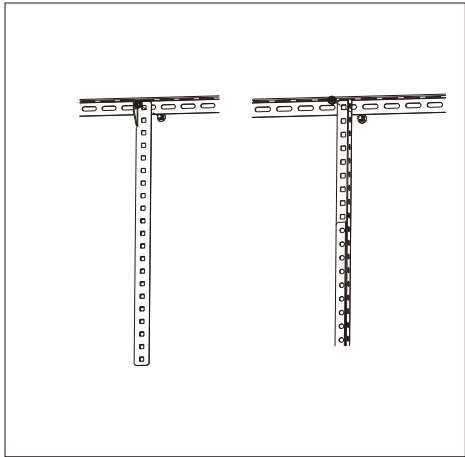

**E** Assemble the wire grids (Page 11-12)


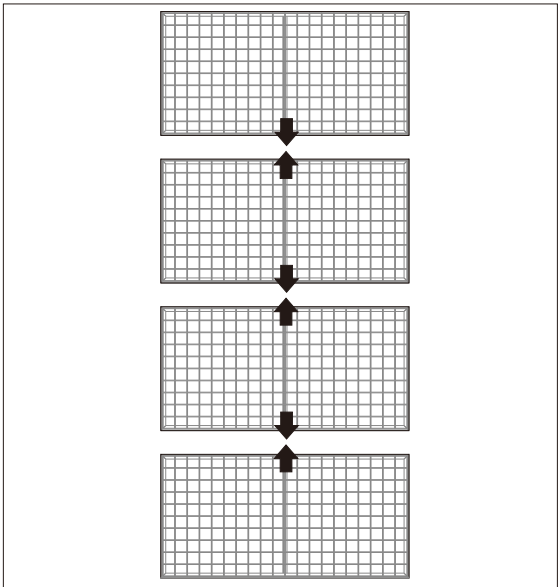


**F** Place and attach wire grid (Page 13)

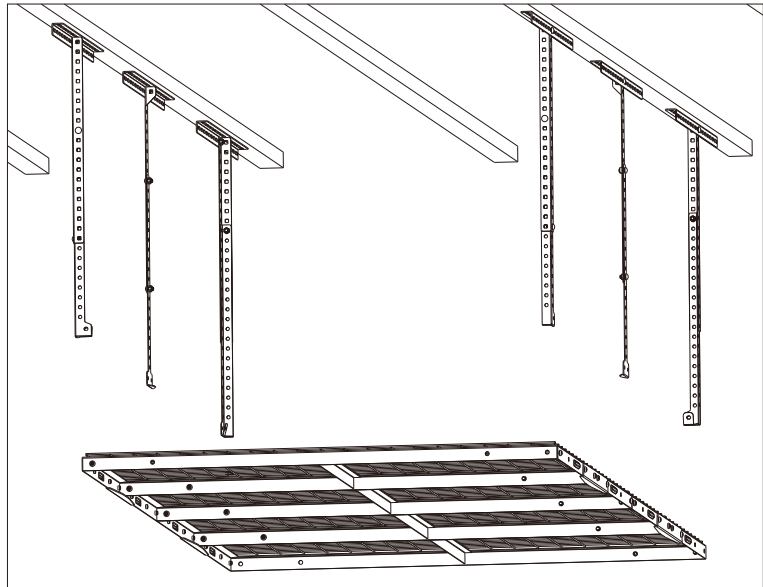

Step 1: Plan the Installation Location


Determine if your ceiling rack will be installed parallel or perpendicular to the direction of your ceiling joists. Make sure that the distance between the vertical posts are 48" apart. Use a stud finder to locate the joists if ceiling is finished with drywall.

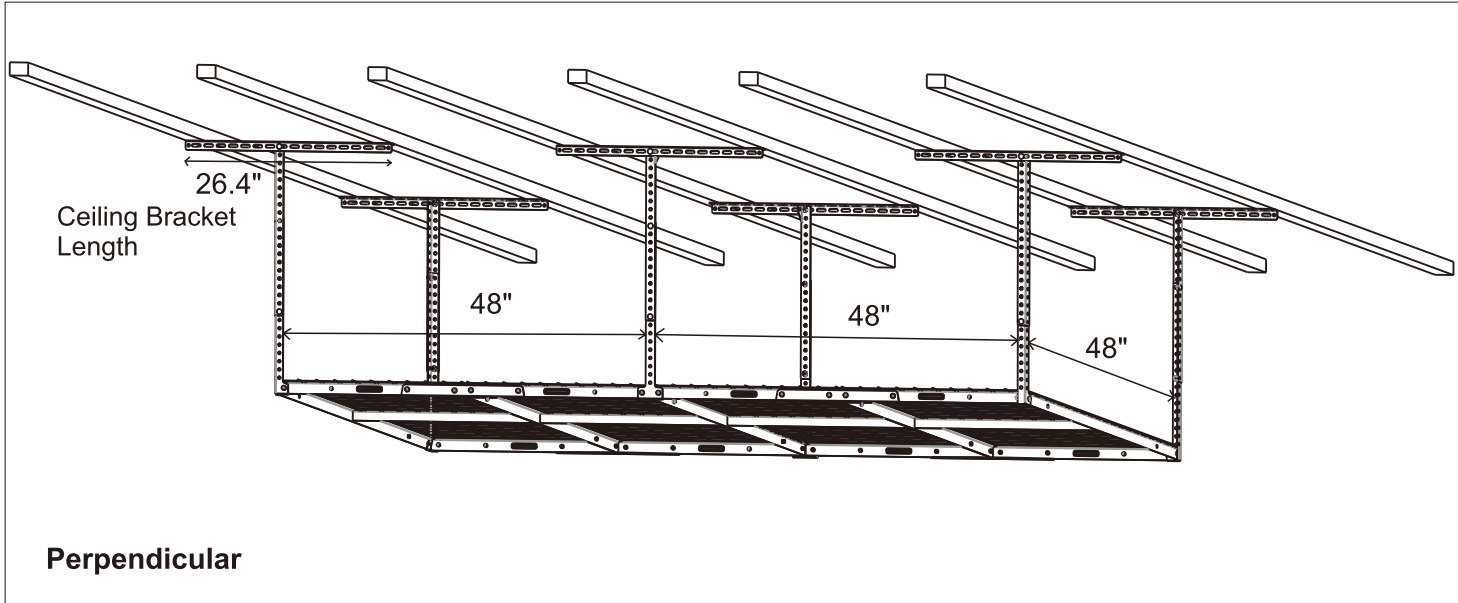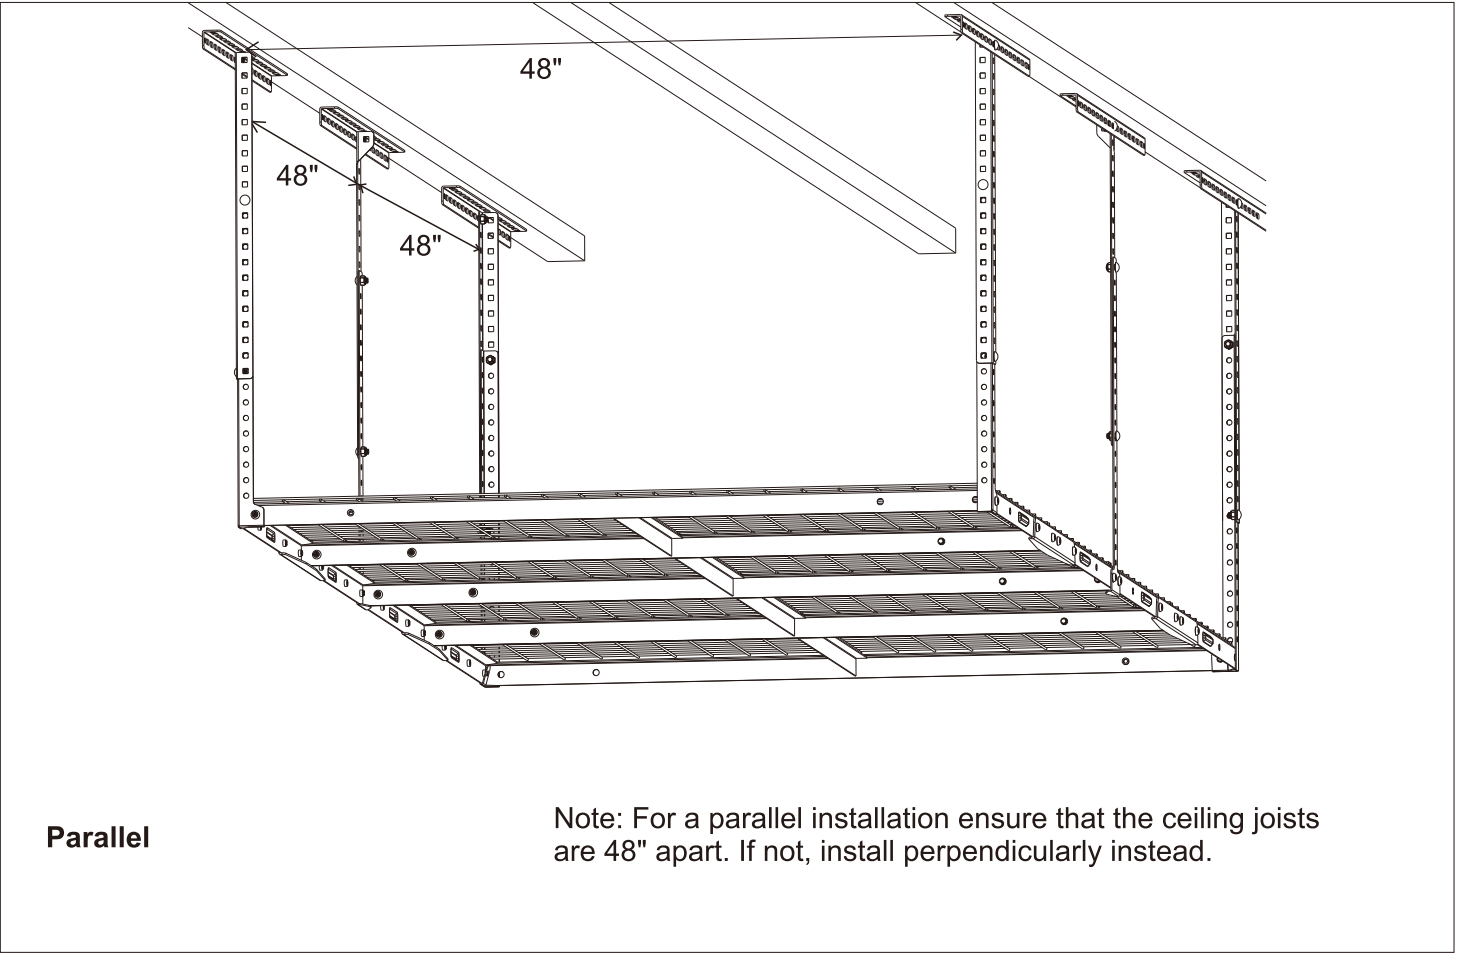




**Step 2-A: Install Ceiling Brackets Perpendicularly**


1. Use a stud finder to locate the wooden ceiling joists. Then use the installation template to mark the mounting points.

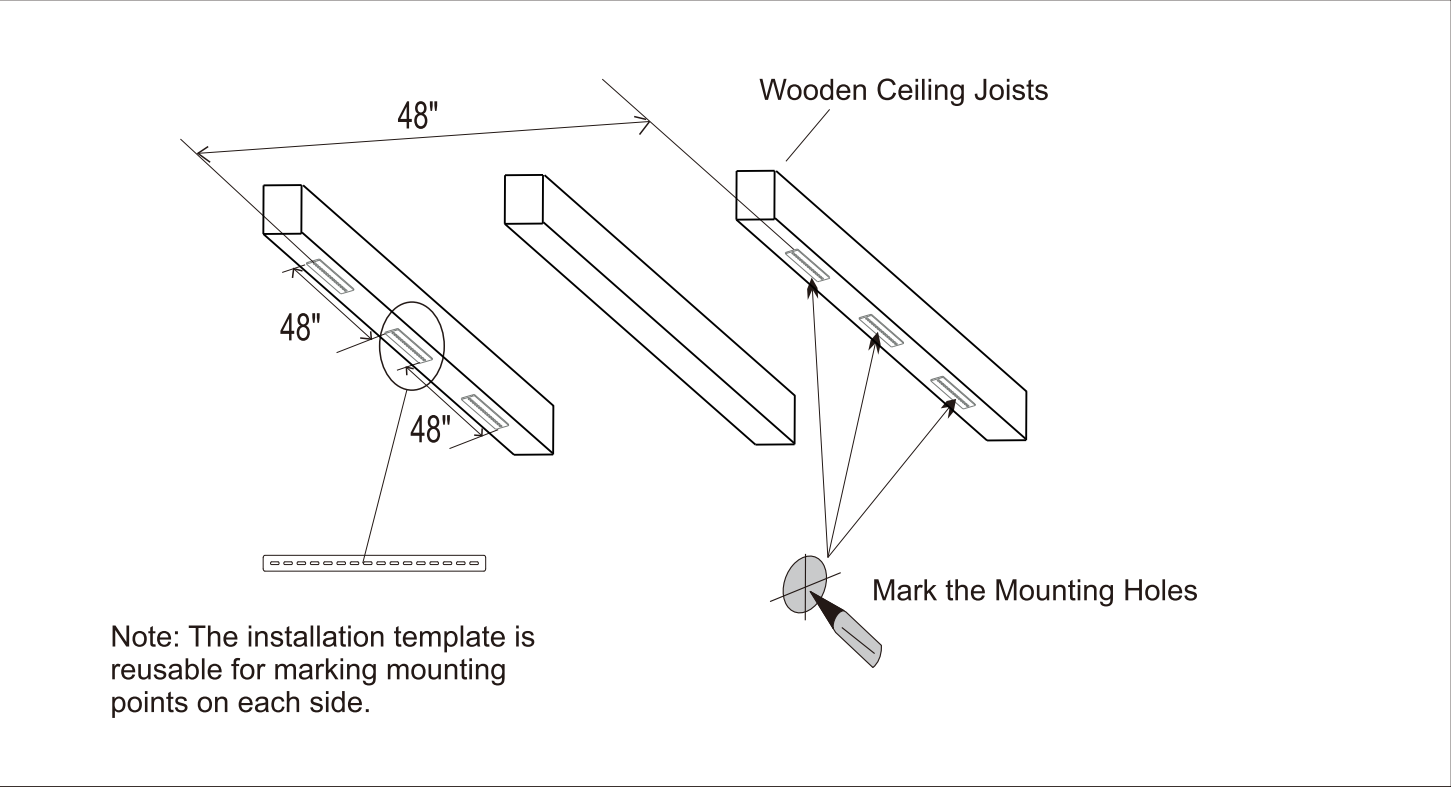

2. Drill a 2.4" (60mm) deep 0.18" (4.5mm) diameter pilot hole at the center of each marked point.

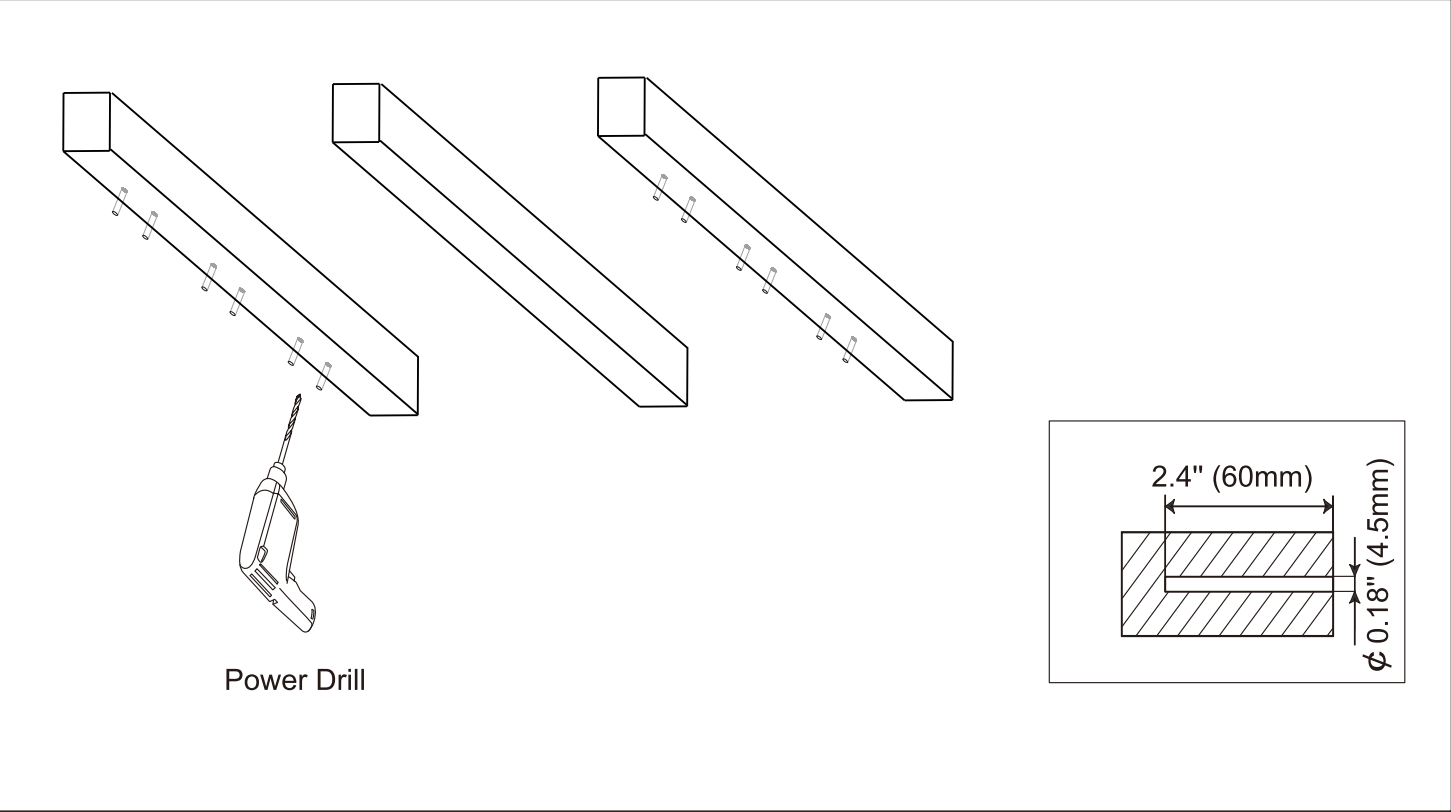


3. Install the ceiling brackets using tapping screws (6) and tighten with socket wrench.

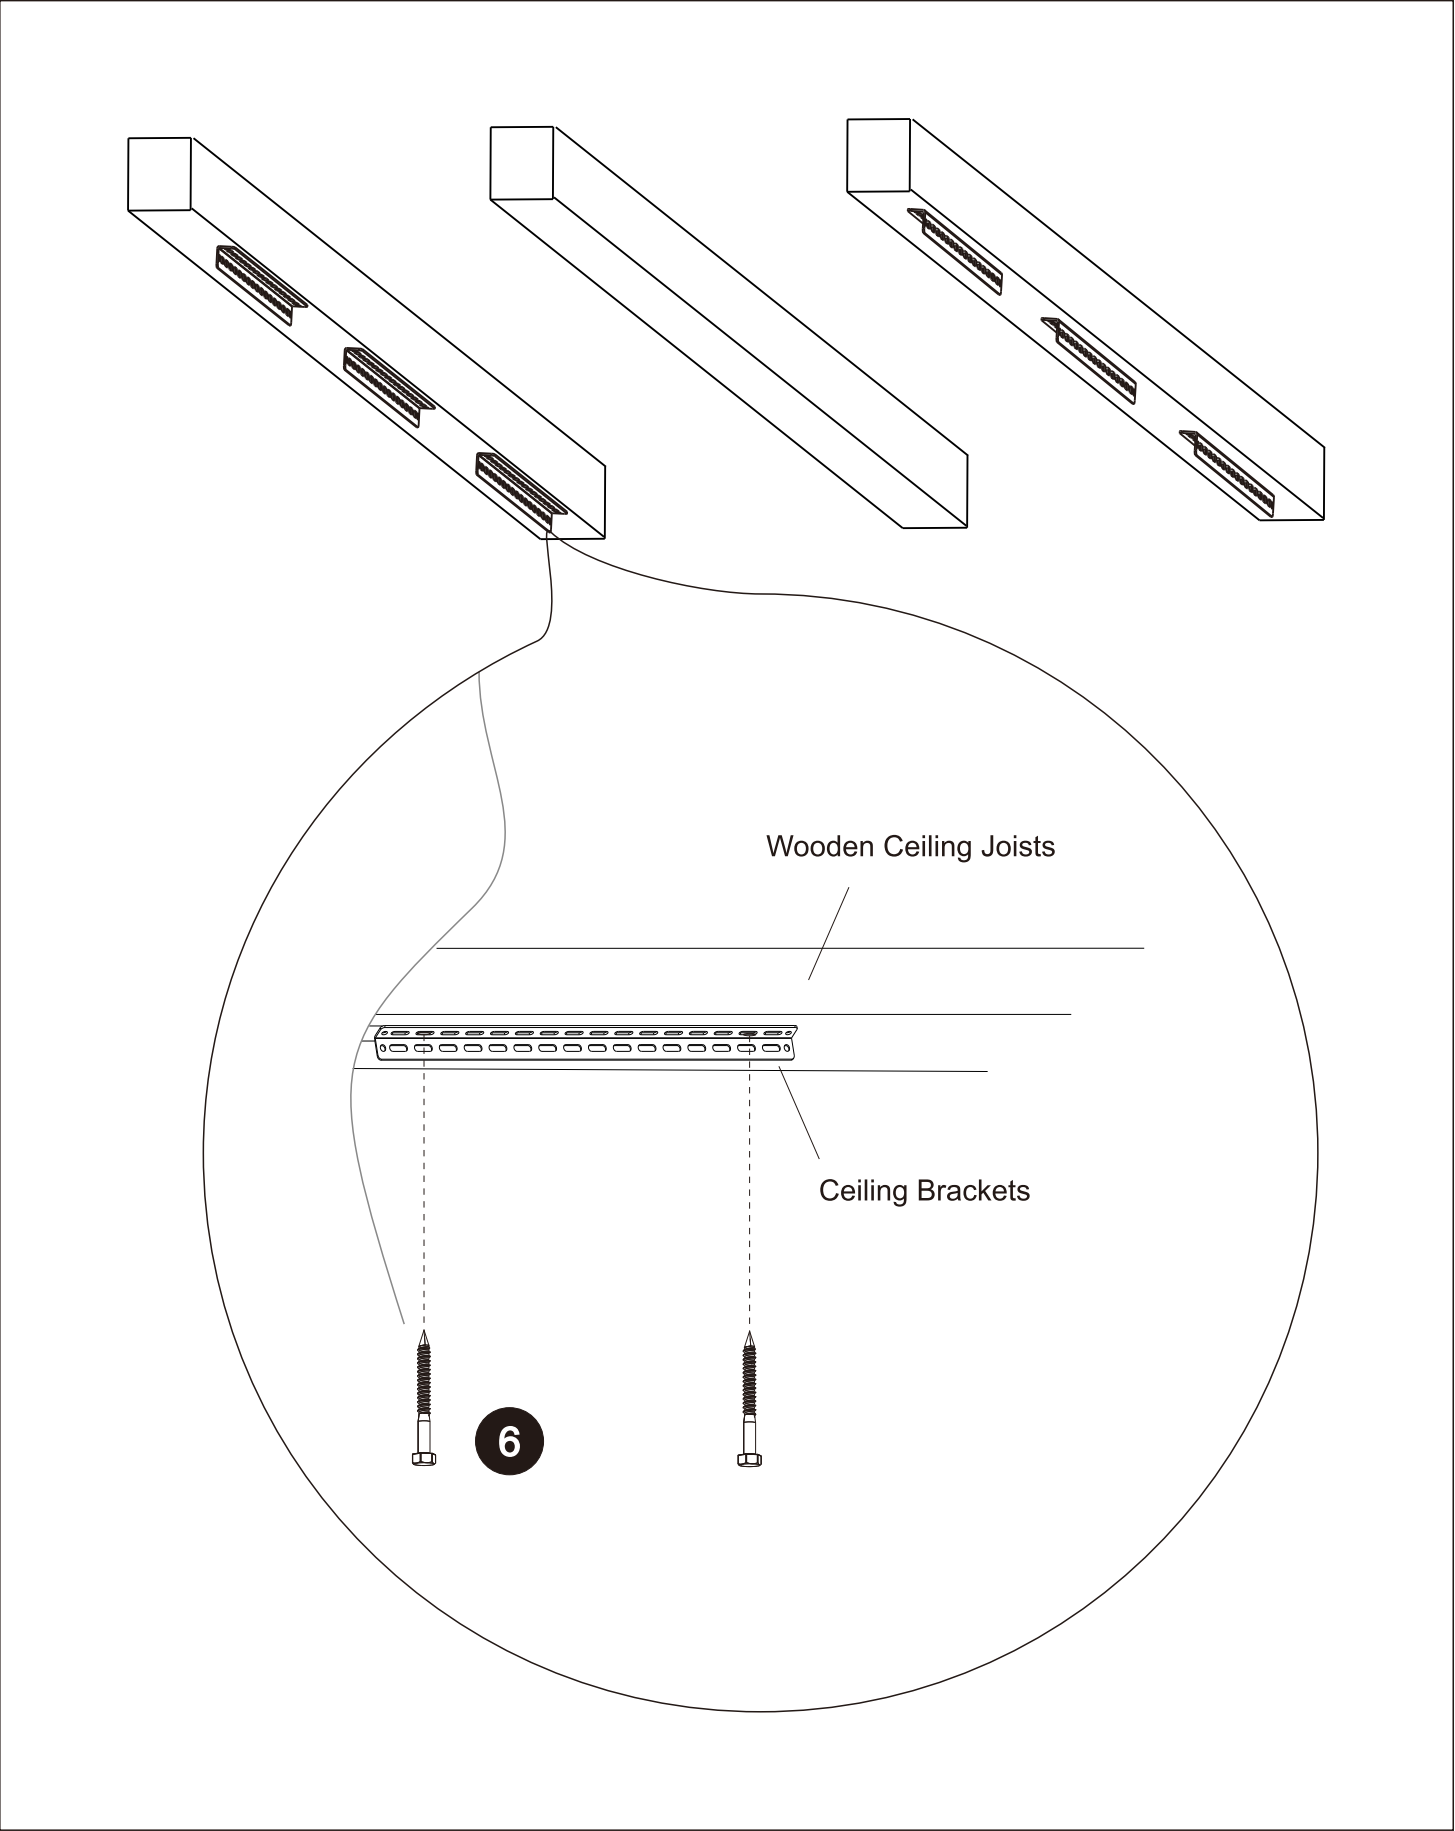


**Step 2-B: Install Ceiling Brackets Perpendicularly**


1. Use a stud finder to locate the wooden ceiling joists. Then use the installation template to mark the mounting points.

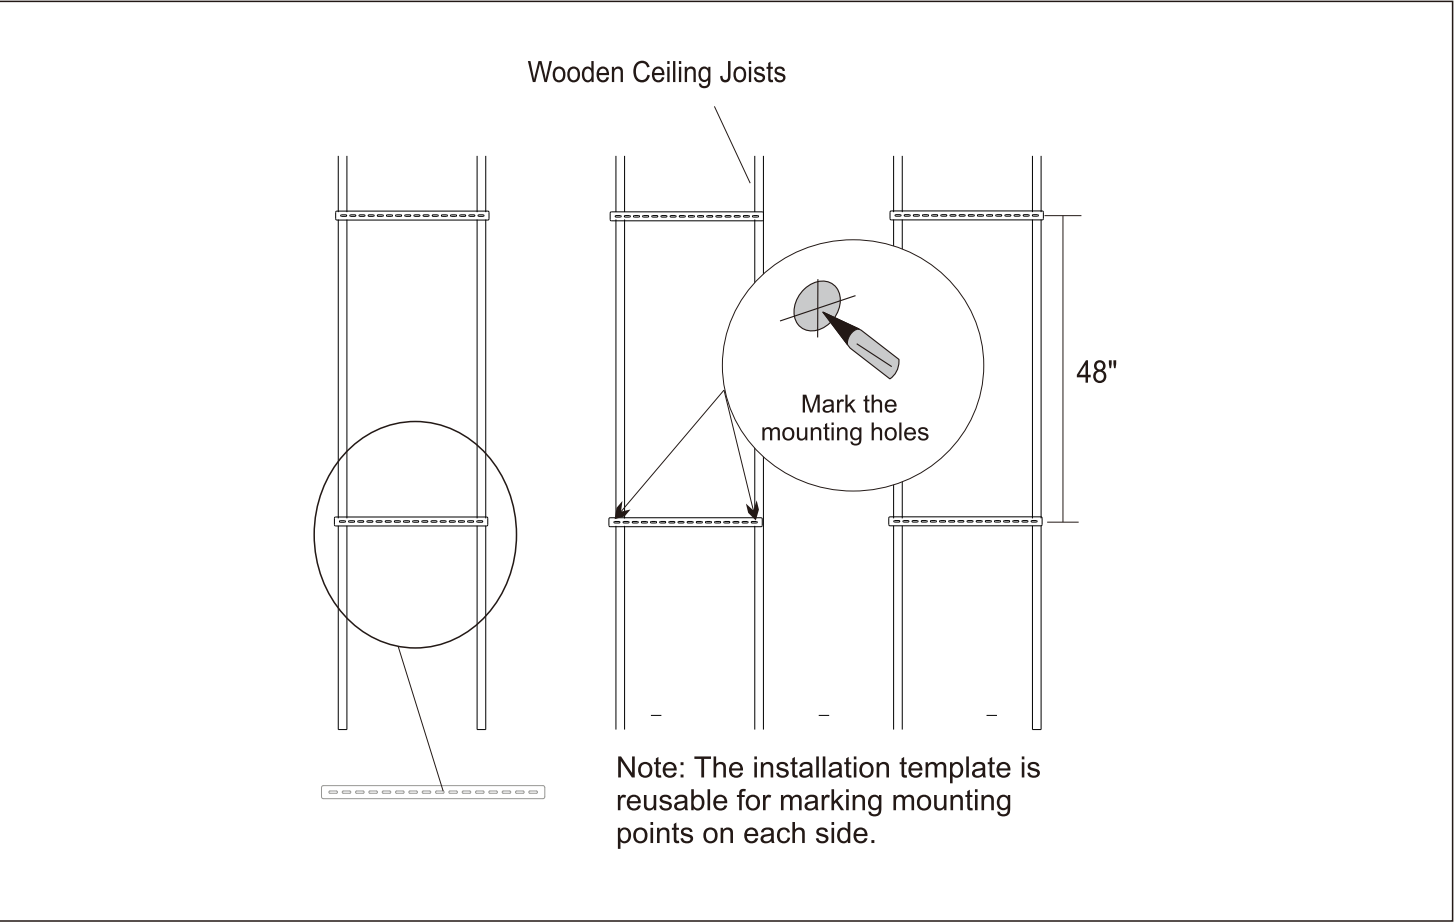

2. Drill a 2.4" (60mm) deep 0.18" (4.5mm) diameter pilot hole at the center of each marked point.

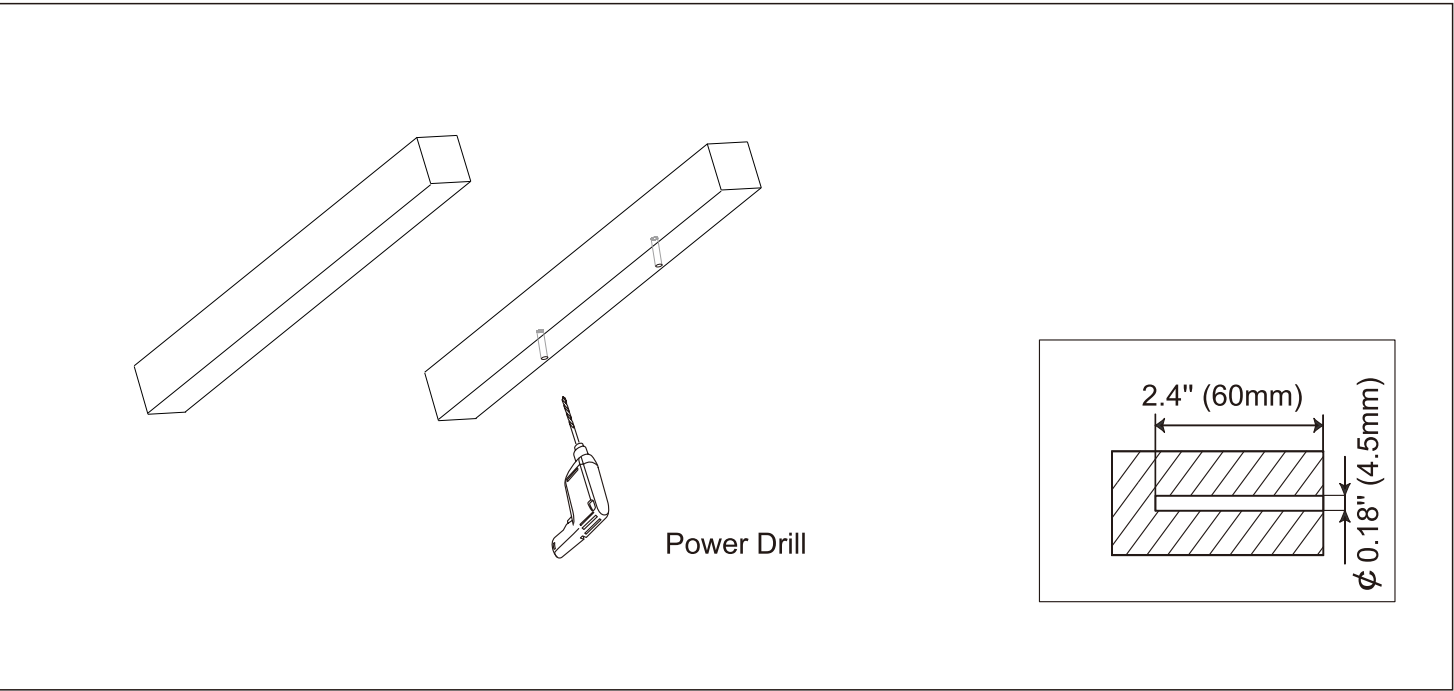


3. Install the ceiling brackets using tapping screws (6) and tighten with socket wrench.

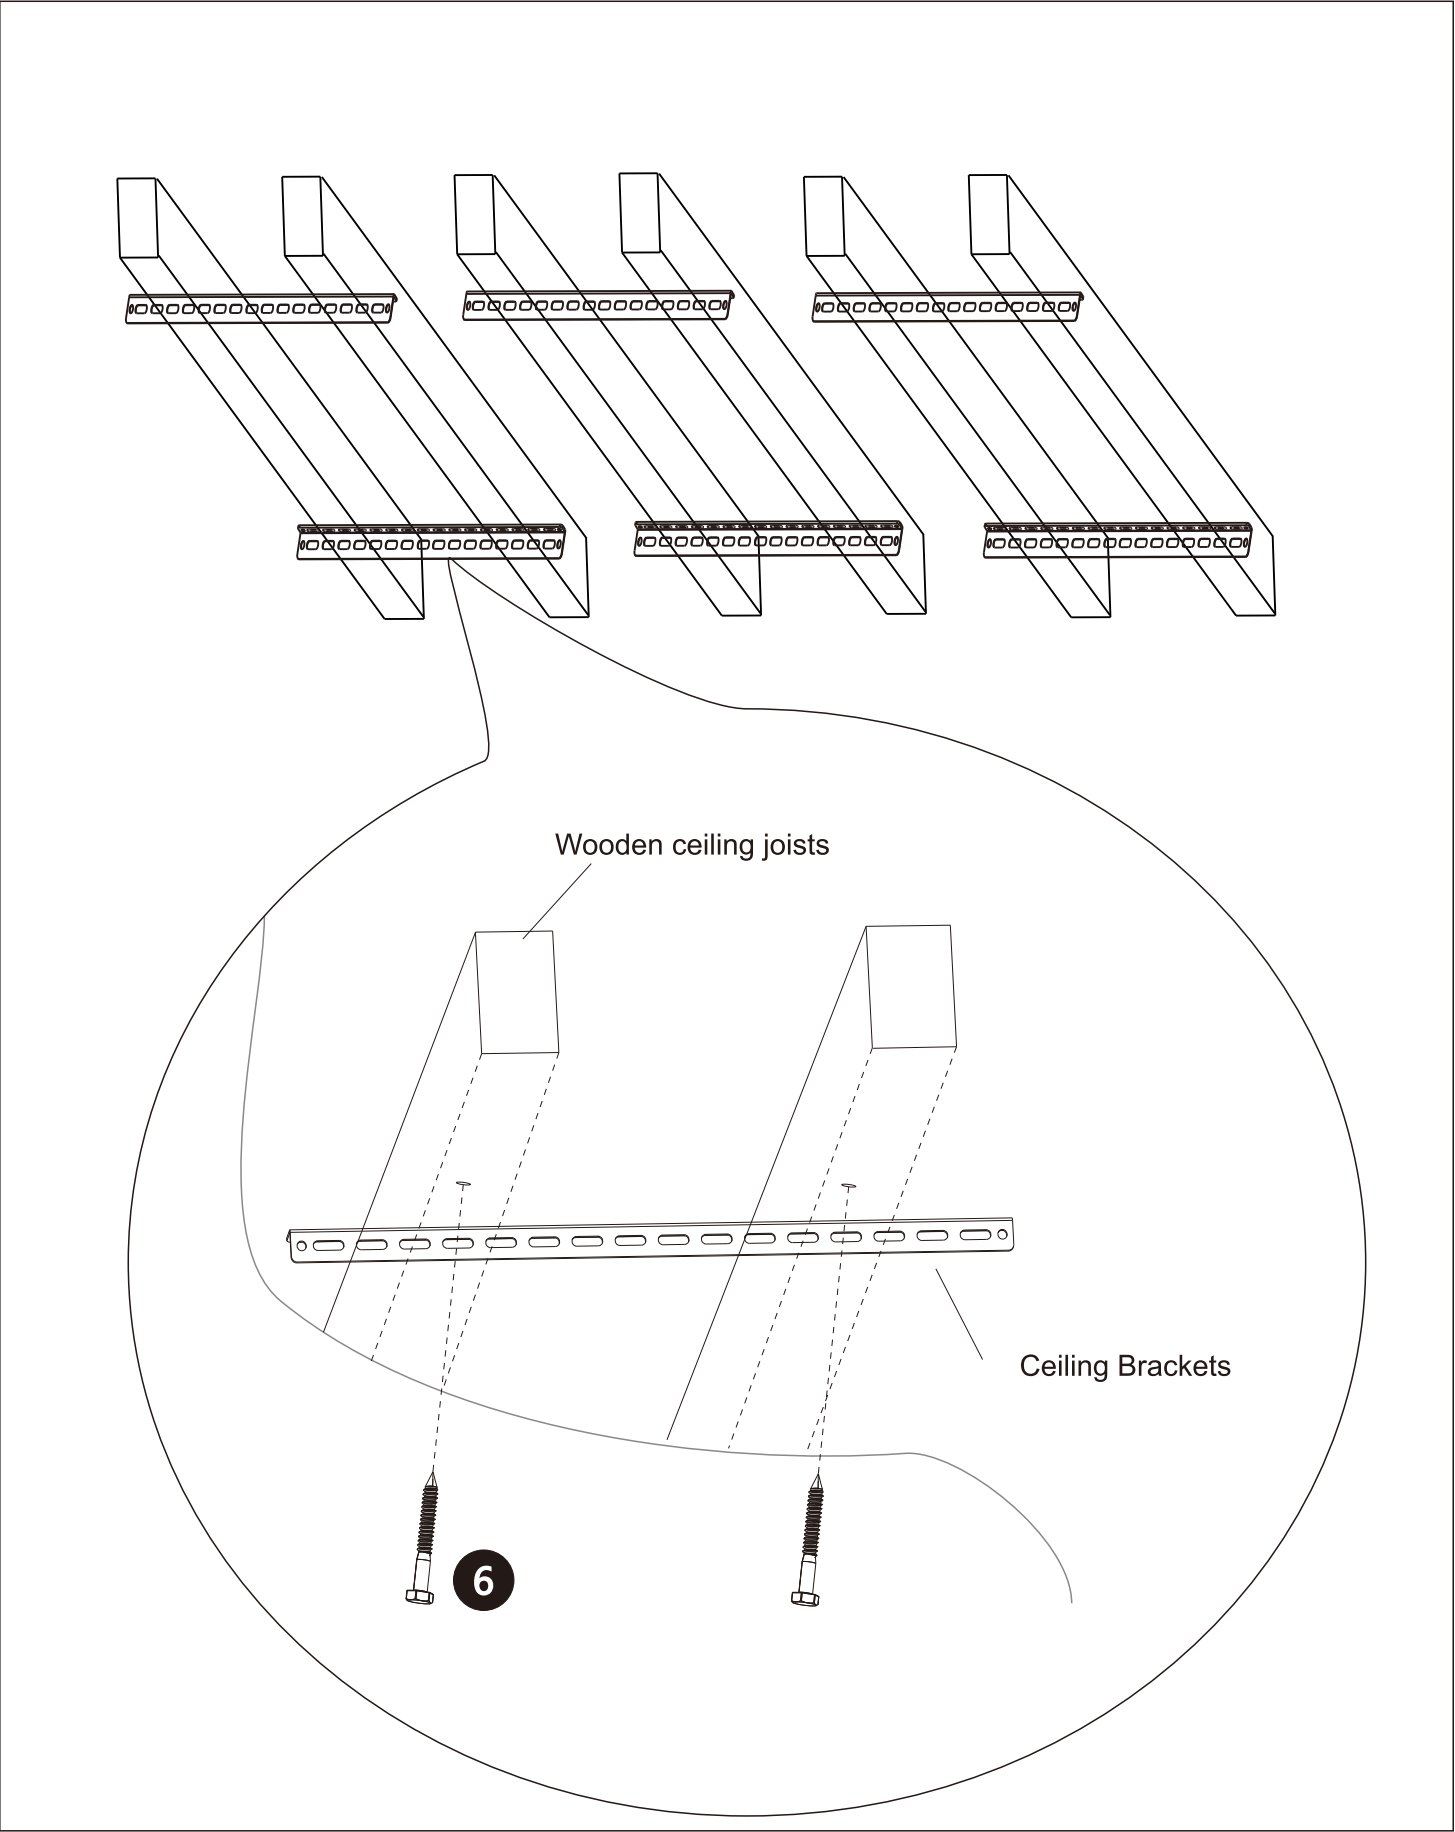


**Step 3: Assemble the Vertical Posts**

Determine hanging height and then attach L-shaped/upright upper vertical posts with L-Shaped/upright lower posts using bolts (7) and nuts (8). Tighten with socket wrench (9) and hex key (10).

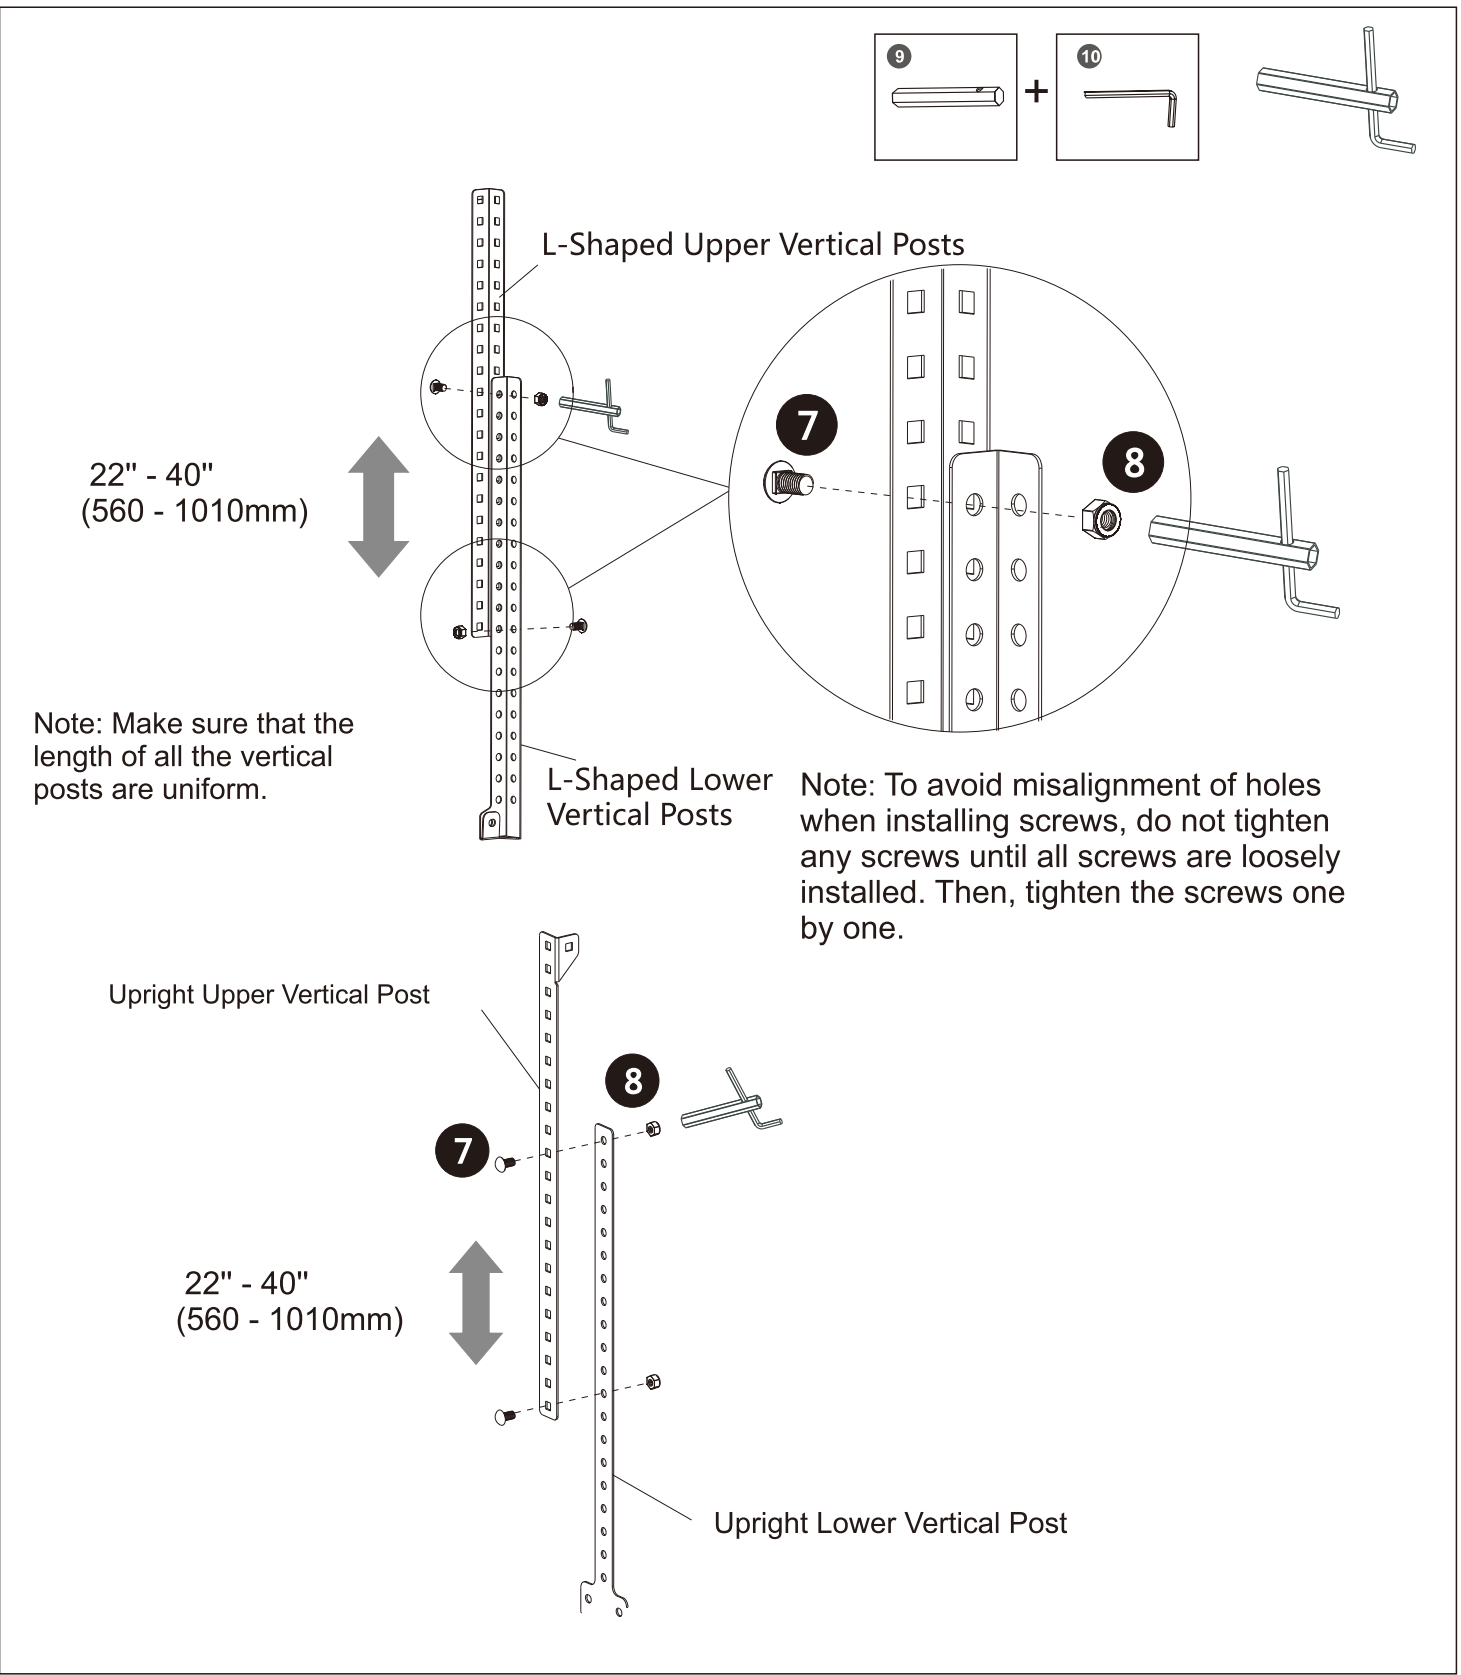



**Step 4: Attach Vertical Posts to Ceiling Brackets**

Attach vertical posts to ceiling brackets. Make sure the distance between the posts are completely consistent with the figure shown below.

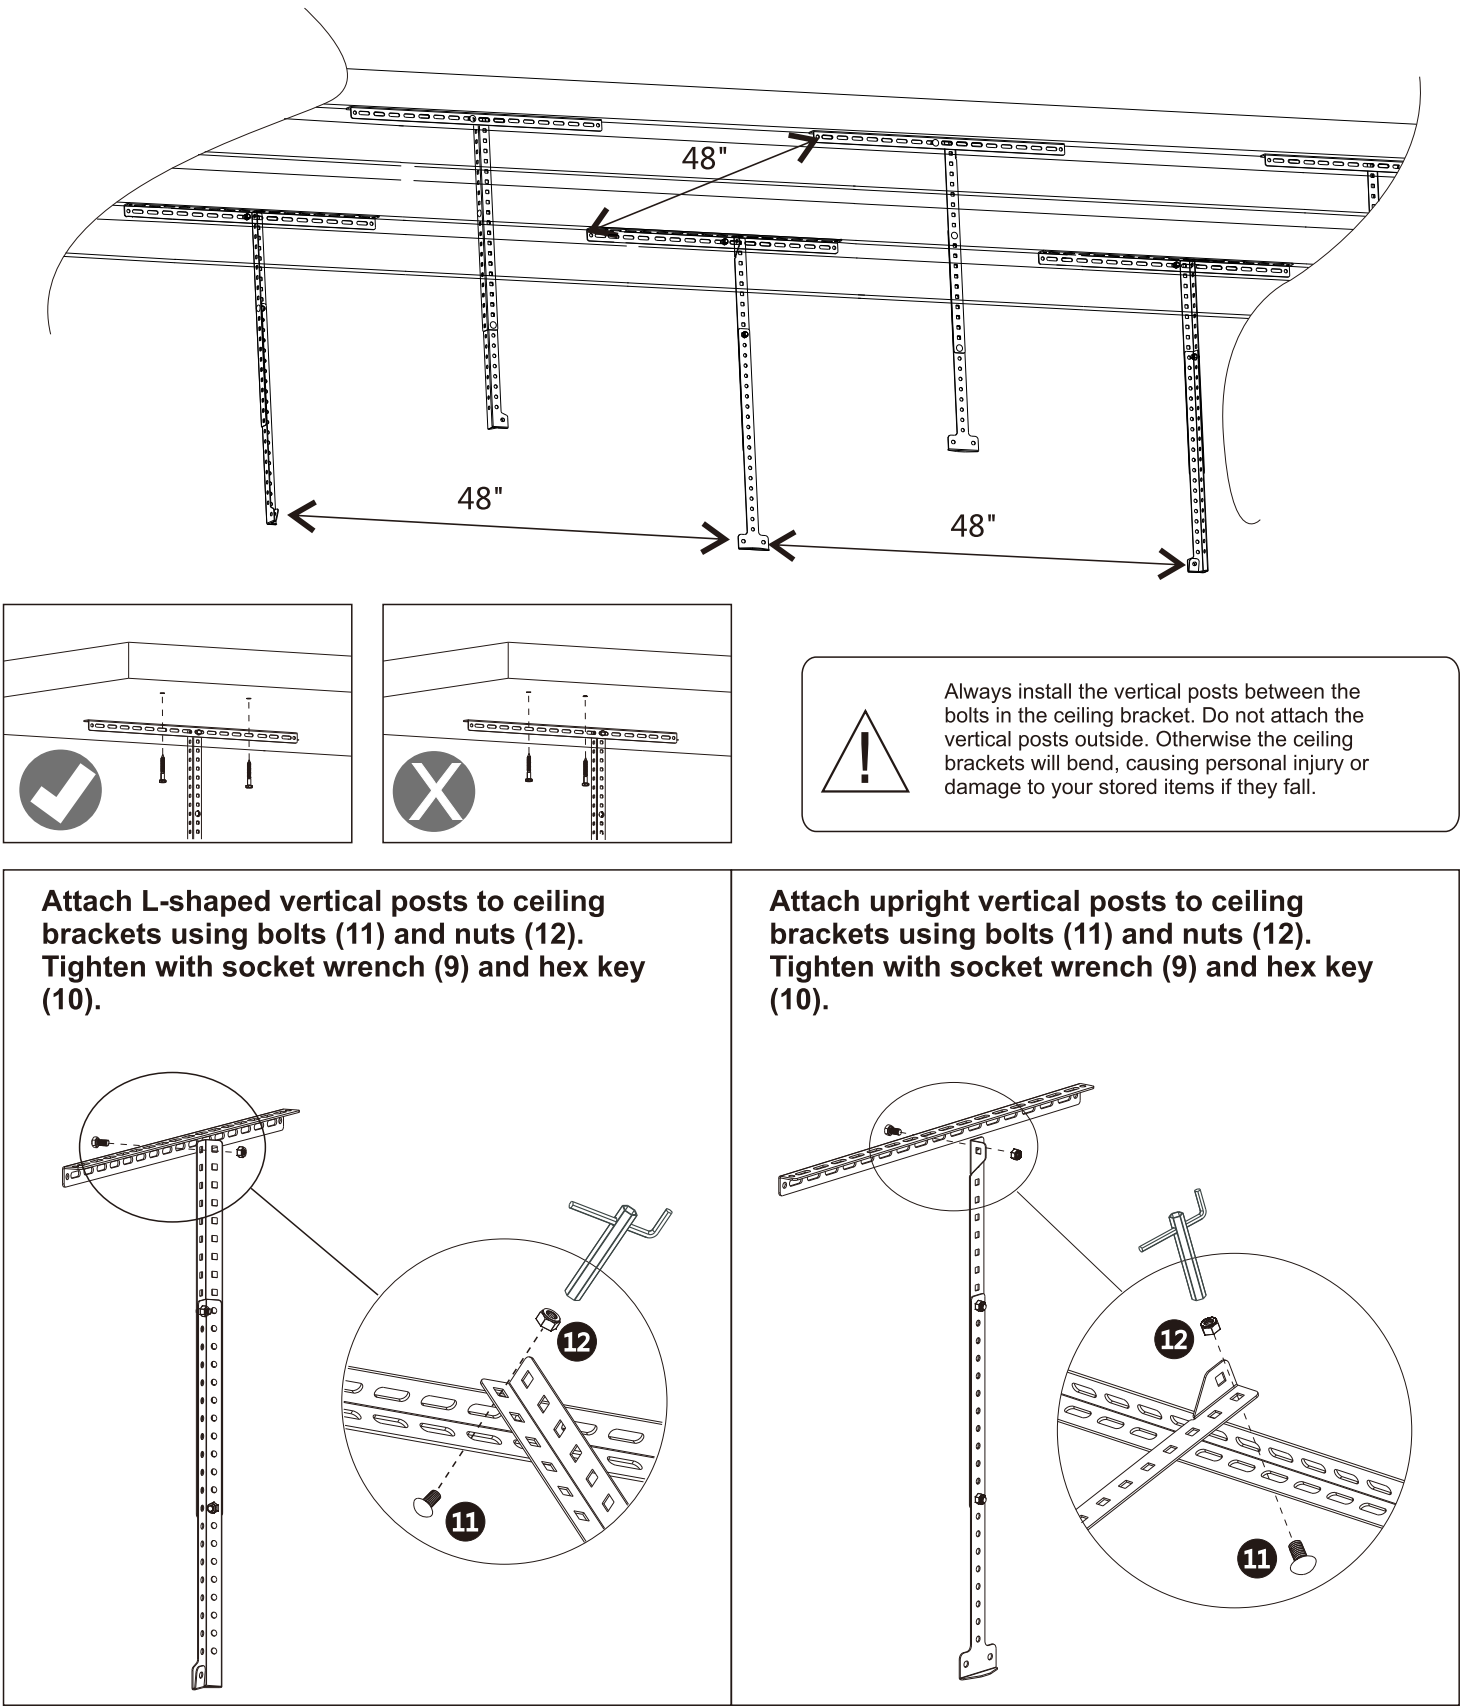


**Step 5: Assemble and Attach Wire Grids**


Right Direction

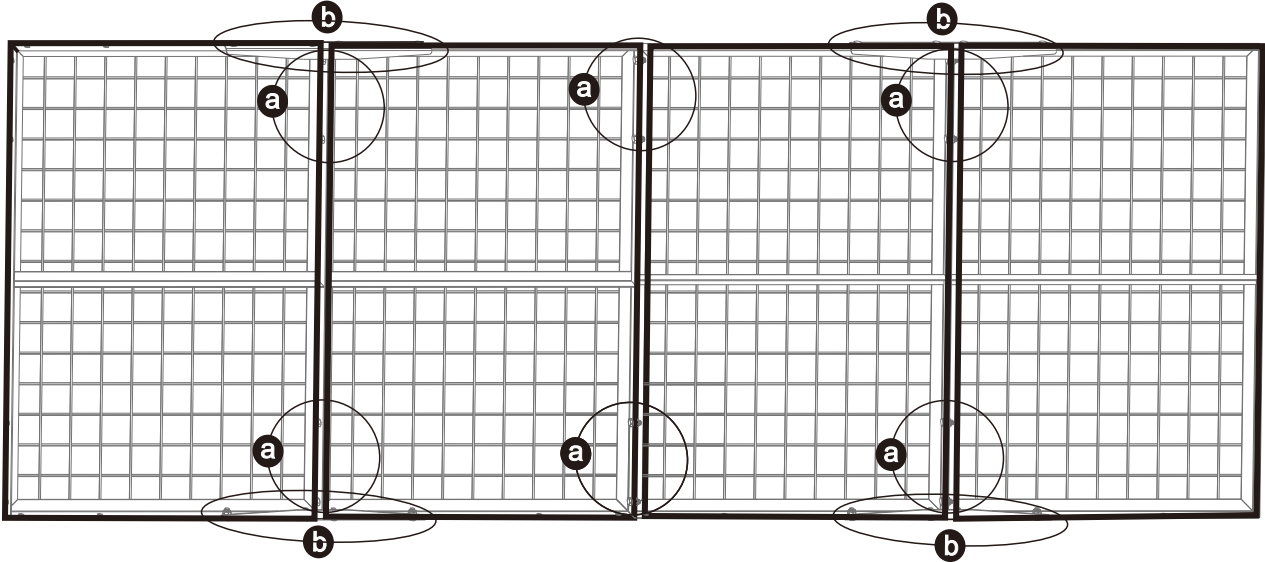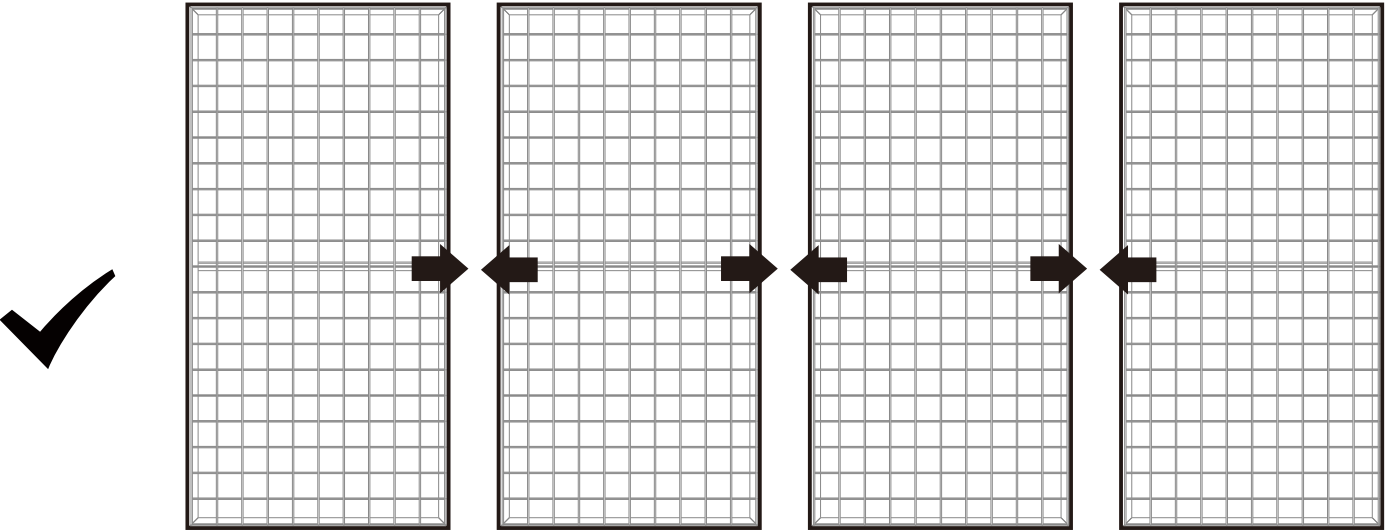


Wrong Direction

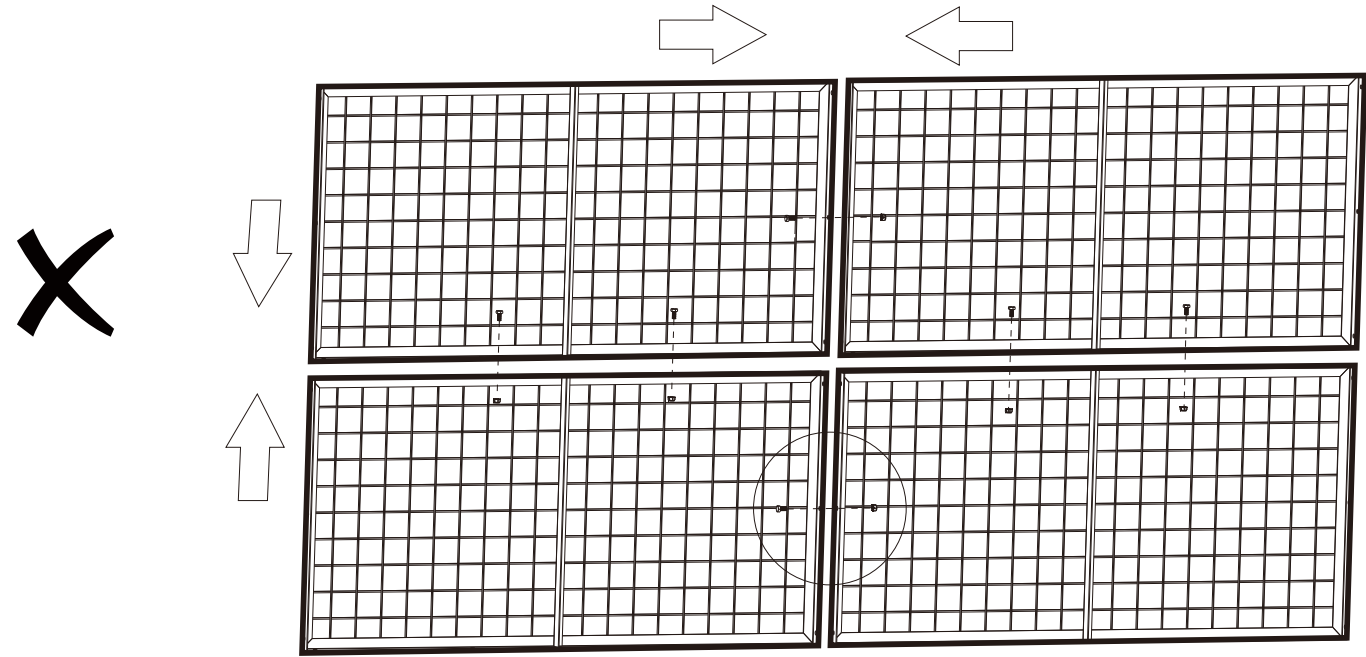


1.Assemble the wire grids side by side as shown in the figure, and attach them using bolts (13). Tighten with hex key (10).

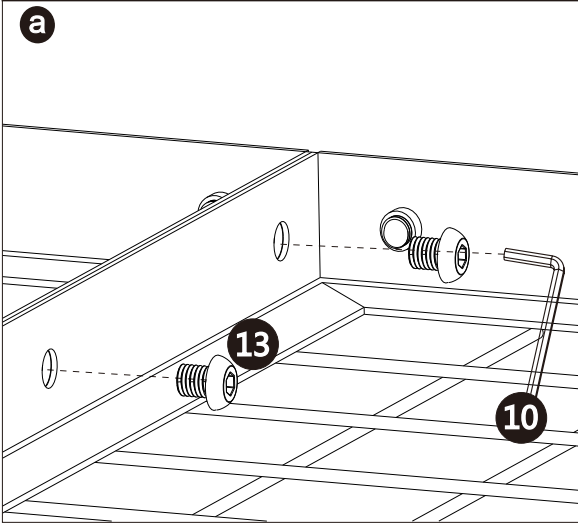

2.Attach the connecting plates at the joints shown in the figure below using the bolts (13). Tighten with hex key (10).

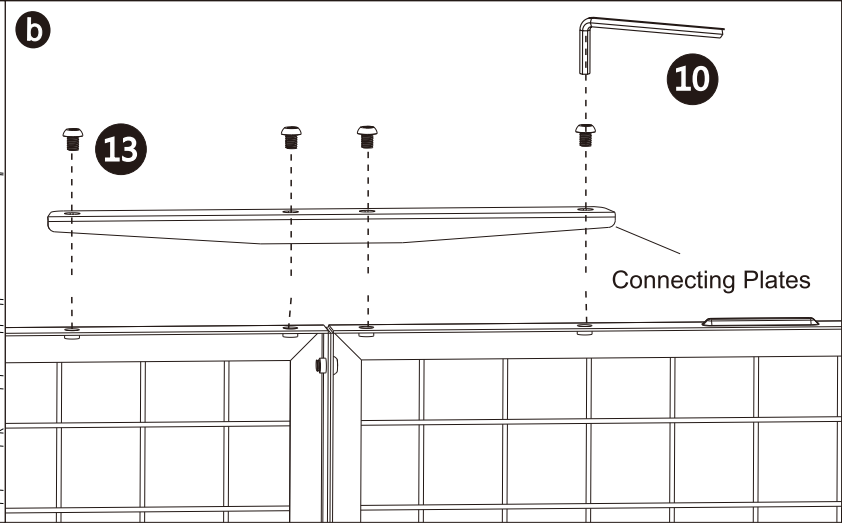


Note: To avoid misalignment of holes when installing screws, do not tighten any screws until all screws are loosely installed. Then, tighten the screws one by one.




Wire Grids

Connecting Plates

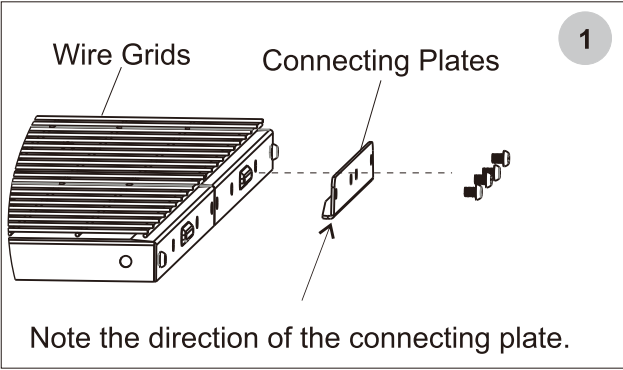


Note the direction of the connecting plate.

2


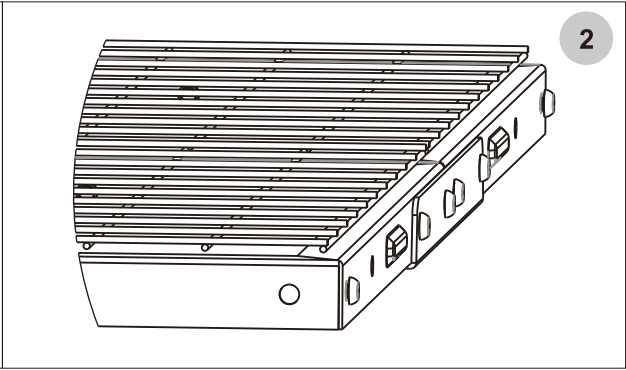


**Step 6: Place and Attach Wire Grid**

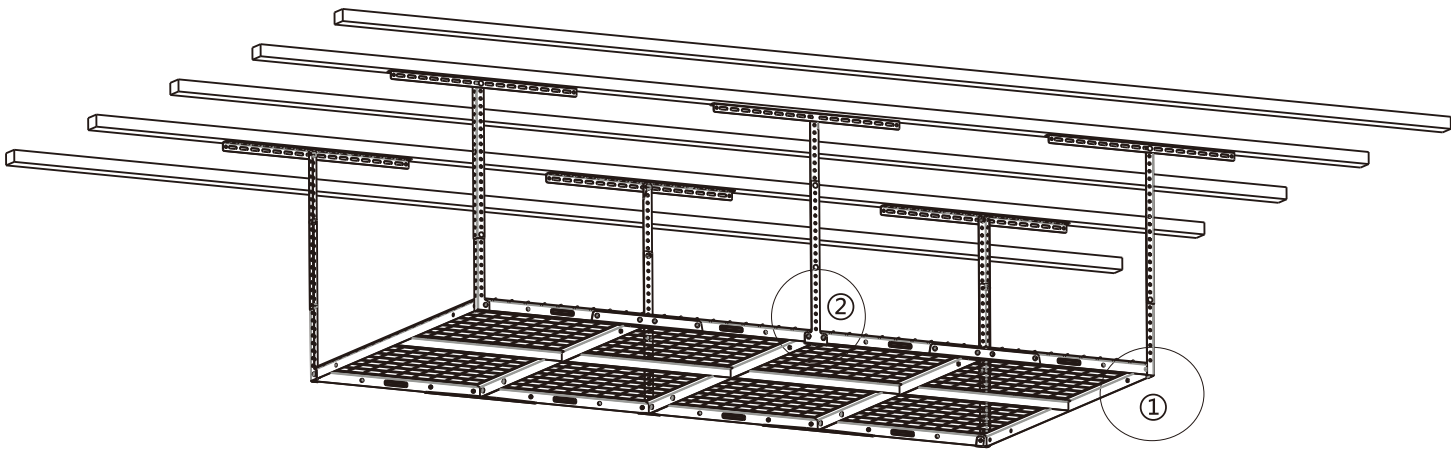

1. Insert the wire grid set. The corners of the grid fit into the slot of the L-shaped vertical posts. Tighten the screws (14) with hex key (10).


2. Attach the upright vertical posts with the side of the grid by tightening the screws (14) with hex key (10).

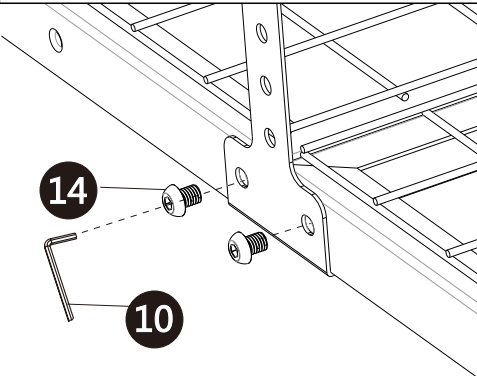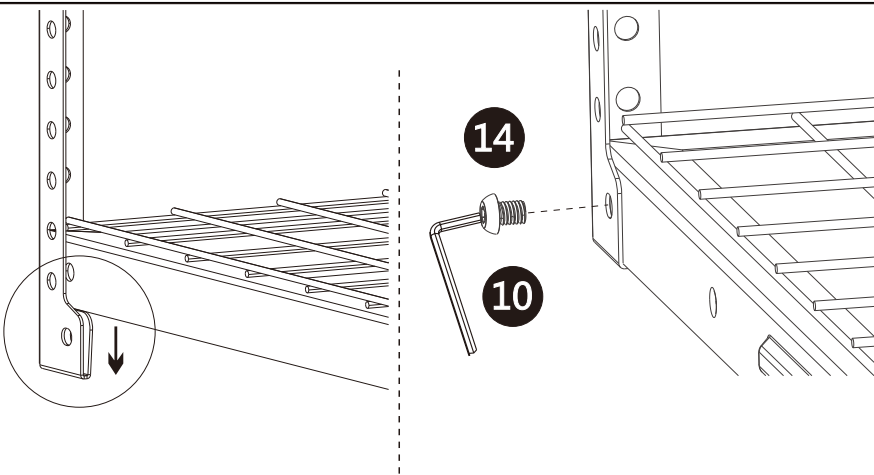

**Installation Tips**


**Use of Metal Expansion Bolt**

The metal expansion bolt is needed if installing to a concrete ceiling (mental expansion bolts are not included).

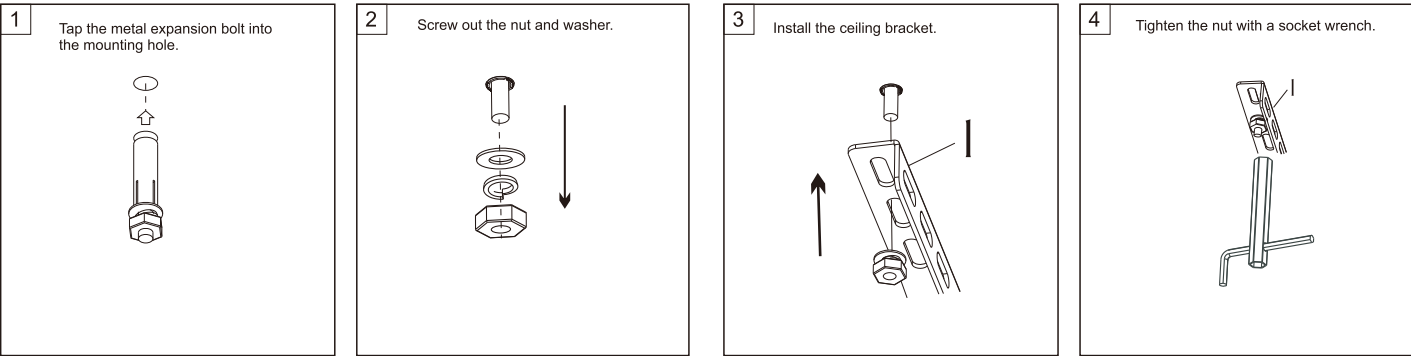

**Installing on Slanted Ceiling**

Fleximounts ceiling rack can be installed on a slanted ceiling by adjusting the length of the vertical angle post assemblies. The ceiling rack must be installed with a horizontally level storage platform, and vertically level vertical angle posts.

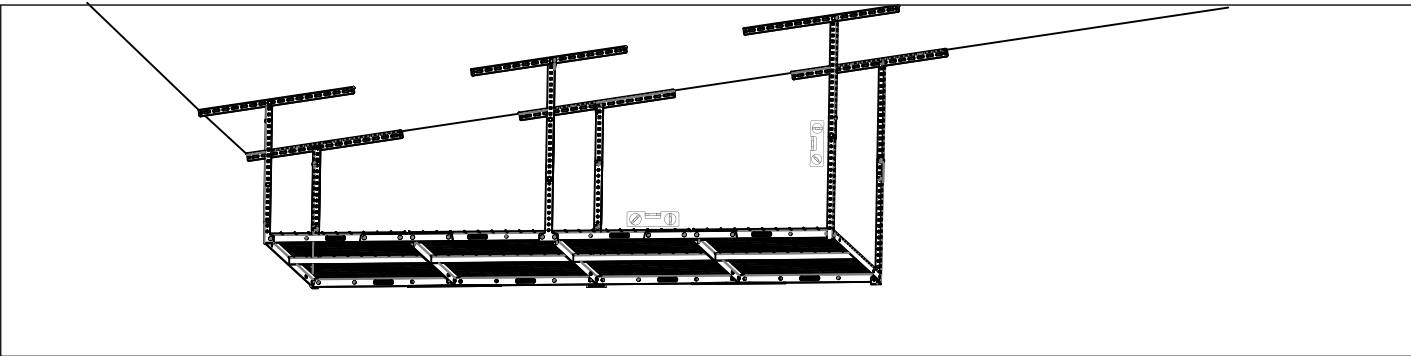

**Installing against Wall**

Fleximounts ceiling rack can be installed against the wall on one end by attaching vertical posts to the wall studs. The wall studs must be 48" apart. Additional hardware required are not included.

