

**CO29 • 21" Marine Combo® Model • Marine Series**

**FEATURES & BENEFITS**



BLACK SOLID



WHITE SOLID

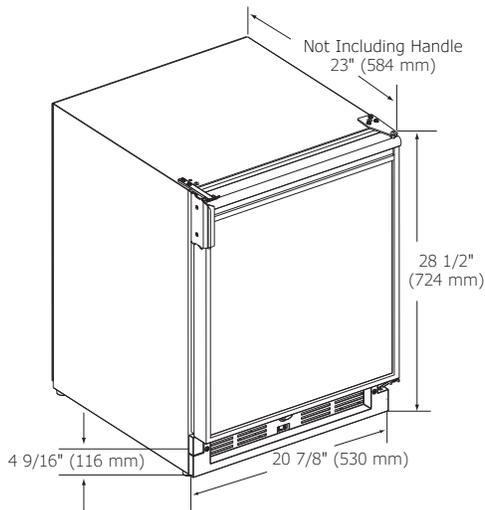
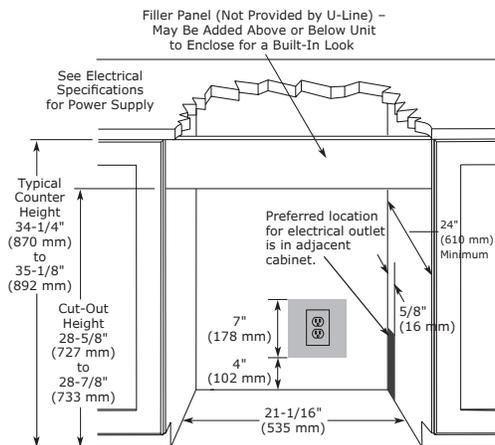
|                          |  |
|--------------------------|--|
| <b>PERFORMANCE</b>       | <ul style="list-style-type: none"> <li>Refrigerator volume of 2.1 cu ft (59,5 litres) holds up to 24 bottles (12 oz / 330 ml) or 44 cans (12 oz / 330 ml)</li> <li>Mechanical Dial Control is conveniently located on the grille</li> <li>Temperature range: 34°F - 45°F (1°C - 7°C)</li> <li>Daily ice produces up to 18 lb (8,2 kg) of ice</li> <li>Up to 13 lb (5,9 kg) in ice storage capacity</li> <li>Crescent ice cube dimensions: 1/2" W x 3/4" H x 2 1/4" L (12,7 mm W x 19 mm H x 57 mm L)</li> <li>Available in 115 or 220-240 volts</li> </ul> |
| <b>INTERIOR/EXTERIOR</b> | <ul style="list-style-type: none"> <li>No drain required</li> <li>Two removable tempered glass shelves</li> <li>Two fixed storage compartments in door</li> <li>Door swing is field reversible</li> <li>Standard travel package includes door latch, ensuring safe-at-sea storage</li> <li>Corrosion and UV resistant components provide product longevity in harsh environments</li> </ul>  |
| <b>INTEGRATION</b>       | <ul style="list-style-type: none"> <li>Unit is designed to be built-in or can be freestanding</li> <li>Available in the following finishes: Black or White</li> <li>Black finish accepts a 1/4" (6,4 mm) custom insert panel</li> </ul>  |

**MODEL DETAILS**

| Model         | Voltage/Hz   | Door Swing       | Finish      | Shipping Weight |
|---------------|--------------|------------------|-------------|-----------------|
| ULN-CO29B-03A | 115 / 60     | Right-Hand Hinge | Black Solid | 94 lb (43 kg)   |
| ULN-CO29B-20A | 220-240 / 50 | Right-Hand Hinge | Black Solid | 94 lb (43 kg)   |
| ULN-CO29W-03A | 115 / 60     | Right-Hand Hinge | White Solid | 94 lb (43 kg)   |
| ULN-CO29W-20A | 220-240 / 50 | Right-Hand Hinge | White Solid | 94 lb (43 kg)   |

**ACCESSORIES**

| Model       | Description                   | Finish | Shipping Weight |
|-------------|-------------------------------|--------|-----------------|
| 80-54674-00 | Braided water supply line kit | N/A    | 2 lb (0,9 kg)   |

**Marine Series • 21" Marine Combo® Model • CO29**
**DIMENSIONS**

**CABINET CUT-OUT**

**SPECIFICATIONS**

|                                     |                         |
|-------------------------------------|-------------------------|
| Model                               | CO29                    |
| Amps: Running (115v)                | 2.5 amps                |
| Amps: Running (220-240v)            | 1.2 amps                |
| Amps: Max Start Up (115v)           | 18 amps                 |
| Amps: Max Start Up (220-240v)       | 6 amps                  |
| Capacity: Bottle                    | 24 (12oz/330ml)         |
| Capacity: Can                       | 44 (12oz/330ml)         |
| Capacity: Volume                    | 2.1 cu ft (59 litres)   |
| Control Type                        | Mechanical Dial         |
| Defrost Type                        | Manual                  |
| Dimensions: Product Depth           | 23" (584 mm)            |
| Dimensions: Product Height          | 28 1/2" (724 mm)        |
| Dimensions: Product Width           | 20 7/8" (530 mm)        |
| ENERGY STAR                         | N/A                     |
| Panel Type (Black Finish Only)      | Insert                  |
| Panel Thickness (Black Finish Only) | 1/4" (6,4 mm)           |
| Panel Height (Black Finish Only)    | 21 13/32" (544 mm)      |
| Panel Width (Black Finish Only)     | 19 13/16" (503 mm)      |
| Ice Production Per Day              | 18 lb                   |
| Ice Storage                         | 13 lb                   |
| Product Weight: Max                 | 85 lb (39 kg)           |
| Refrigerant Type                    | R134A                   |
| Sabbath (Star K Certified)          | No                      |
| Temperature Range                   | 34°F - 45°F (1°C - 7°C) |

**INSTALLATION NOTES**

Cutout includes the additional 1/4" (6,4 mm) width overall to ensure proper installation.

No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille air flow.



Residential

UL listing only applies to 115 v models.

CE only applies to 220-240v models.

Please visit [U-Line.com](http://U-Line.com) to view this model's User Guide.

All specifications are subject to change without notice.