



Land Rover:
LR2 2008-2012
LR3 2005-2009
Range Rover Sport 2006-2009


KIT FEATURES

- ISO DDIN radio provision
- Painted scratch resistant matte black


KIT COMPONENTS

- A) Radio trim panel • B) Radio brackets • C) (4) #8 x 3/8" Phillips screws

A



B



C



TABLE OF CONTENTS

Dash Disassembly	2
Kit Assembly	3

WIRING & ANTENNA CONNECTIONS (sold separately)

Wiring Harness: See metraonline.com for wiring harness options

Antenna Adapter: 40-EU10

TOOLS REQUIRED

- Panel removal tool • Phillips screwdriver

Caution! All accessories, switches, climate controls panels, and especially air bag indicator lights must be connected before cycling the ignition. Also, do not remove the factory radio with the key in the on position, or while the vehicle is running.

DASH DISASSEMBLY

1. Unclip and remove the dash panel surrounding the radio.
2. Remove (4) screws securing the radio.
3. Pull up on the shifter knob to remove it.
4. Unclip, unplug and remove the center console panel.
5. Remove the (2) screws securing the climate control panel.
6. Unclip and remove the A/C vent panel.
7. Pull the radio and the climate controls out slightly. The climate control does not need to be completely removed.
8. Unclip and remove the radio.


Please visit Metraonline.com for Dash Disassembly illustrations.

Continue to Kit Assembly


KIT ASSEMBLY

ISO DDIN radio provision

1. Attach the **radio brackets** to the **radio trim panel** using (4) #8 x 3/8" Phillips screws supplied. (Figure A)
2. Slide the radio into the completed assembly, and then secure it to the assembly using screws supplied with the radio. (Figure B)
3. Locate the factory wiring harness and antenna connector in the dash, and complete all necessary connections to the radio. Metra recommends using the proper mating adapter from Metra and/or AXXESS. Test the radio for proper operation.
4. Reassemble the dash in reverse order of disassembly.

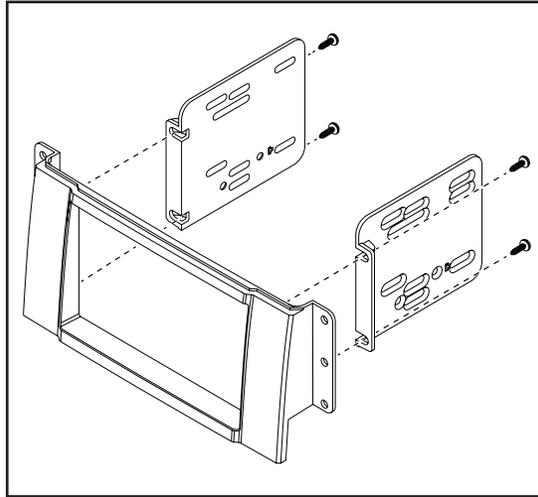

(Figure A)

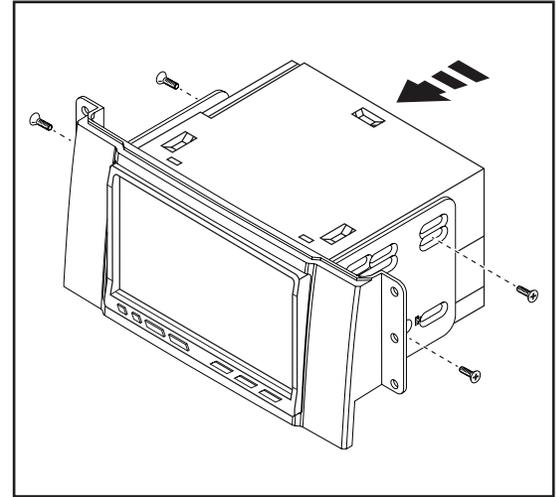

(Figure B)



95-9406B
INSTALLATION INSTRUCTIONS



If you are having difficulties with the installation of this product, contact our Tech Support line either by phone at **386-257-1187**, or email at **techsupport@metra-autosound.com**. Before doing so, look over the instruction booklet a second time and ensure that the installation was performed exactly as the instruction booklet is stated. Have the vehicle apart and ready to perform troubleshooting steps before contacting Metra/Axxess Tech Support.



KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.



**Metra recommends MECP
certified technicians**