

HR 1954-3 LP DF  
48 inch range  
Dual Fuel model with M Touch controls



- Network-enabled WiFi appliance – Miele@home
- Plenty of space for cooking – eight powerful burners
- Speed oven for a maximum variety of uses
- Perfect baking and roasting results – Moisture plus
- Precise cooking temperature – Wireless Precision Probe

EAN: 4002516486503 / Material number: 11791680 /  
Old Material Number: 25195482USA

<b>Heating type</b>	
Dual fuel	•
Gas type	Liquid propane
<b>Design</b>	
Range including speed oven and gourmet drawer	•
Appliance width in inches	48
<b>Convenience features</b>	
Precise speed oven temperature regulation in °F (°C)	85-475 (30-250)
Microwave power levels	1 - 7
Wireless Precision Probe	•
Roast probe- speed oven	•
Keep-warm function	•
Crisp function	•
<b>Operating modes</b>	
Speed Oven MasterChef automatic programs	•
Surround	•
Maxi Broil	•
Moisture Plus	•
Convection Bake	•
Convection Roast	•
Combi Auto Roast	•
Microwave	•
Combi Bake	•
Micro Broil	•
Combi Broil	•
Intensive Bake	•
Auto roast	•
Convection Roast	•
Broil	•
Browning	•
Bake	•
Slow roast	•
Defrost	•
Special modes	•
<b>Design</b>	
Appliance color	Clean Touch Steel
Oven display	M Touch
Speed Oven display	M Touch / M Touch
<b>Convenience features and modes</b>	
Warm cups	•
Warm plates	•
Keep food at serving temperature	•
Low-temperature cooking	•
Precise electronic temperature control from 104°F to 185°F	•
<b>Cooktop features</b>	
Number of gas burners	8
Number of TrueSimmer burners x power in BTU	2 x 10.00
Number of power burners x power in BTU	2 x 13.00

HR 1954-3 LP DF  
48 inch range  
Dual Fuel model with M Touch controls



EAN: 4002516486503 / Material number: 11791680 /  
Old Material Number: 25195482USA

Number of high burners x power in BTU	4 x 19.50
True Simmer function	•
GasStop	•
<b>User convenience</b>	
Networking with Miele@home	•
Precision knobs	•
Illuminated knob	•
ComfortSwivel handle	•
Motorized lift-up control panel	•
Time synchronization	•
Sabbath program	•
Automatic switch-off	•
MultiLingua	•
Acoustic signal when desired temperature is reached	•
MyMiele	•
Warming drawer capacity	6 place settings
Microwave popcorn function	•
Recommended microwave output for each mode	•
Timed bursts of steam	•
Fully telescopic for easy loading and unloading of the gourmet drawer	•
Gourmet drawer with push-to-open mechanism	•
Time of day display	•
Date display	•
Minute minder	•
Programmable cooking time	•
Actual temperature display	•
Default temperature	•
Minute Plus button	•
Favorites	•
Individual settings	•
<b>Appliance door</b>	
CleanGlass door	•
Door contact switch	•
SoftClose oven door/ SoftOpen	•
<b>Oven compartment</b>	
Oven cavity volume in cu. ft. (l)	3.21 (91) ft <sup>3</sup> (l)
Speed oven cavity volume in cu.ft. (l)	1.52 (43)
Number of oven shelf levels	5
Number of Speed Oven shelf levels	3
No. of halogen lamps	triple in oven/single in speed oven
<b>Efficiency and sustainability</b>	
Automatic residual heat utilization	•
Energy-saving lighting circuit	•
Rapid PreHeat	•
<b>Cleaning convenience</b>	
Stainless-steel front with partial Clean Touch Steel finish	•

HR 1954-3 LP DF  
48 inch range  
Dual Fuel model with M Touch controls



EAN: 4002516486503 / Material number: 11791680 /  
Old Material Number: 25195482USA

Stainless-steel Speed Oven interior with PerfectClean and  
linen-weave finish •

Oven with self-cleaning program •

Catalyzer •

Catalyzer heated

ComfortClean dishwasher-safe grates •

Cooktop surface Black enamel

#### Safety

Appliance cooling system and cool touch front •

Safety cut-out •

Anti-slip liner in the gourmet drawer •

System lock •

Door contact switch •

Door lock during self cleaning •

#### Technical data

Appliance height min in in.(mm) 37 1/8 (942)

Dimensions (depth) in in. (mm) with bullnose 27 3/4 (702)

Appliance height max in in.(mm) 38 5/8 (980)

Frequency in Hz 60

Fresh water connection for Moisture Plus •

Plumbed water connection for Moisture Plus 3.0

Appliance width in in. (mm) 48 1/8 (1220)

Power Rating in V 120

Voltage in V 240/208

Fuse rating in A 50

Number of phases 1

#### Standard accessories

Anti-splash insert 1

Baking and roasting rack with PerfectClean 1

Self Clean ready baking and roasting rack 3

FlexiClip runners Self Clean ready 2


Side racks self clean ready 1

PerfectClean perforated baking tray 1

Glass tray 2




HR 1954-3 LP DF  
48 inch range  
Dual Fuel model with M Touch controls

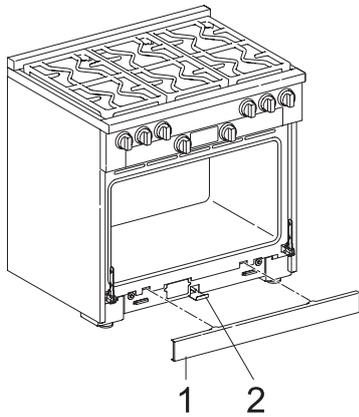


HR11xx, HR19xx, HR17xx – Installation drawing

1 Toe kick cover , 2 Locking clamp

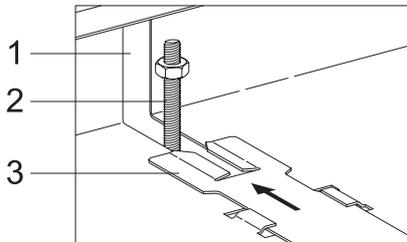


HR11xx, HR19xx, HR17xx – Installation drawing

1 Opening in the range housing , 2 Bolt of the anti-tip device , 3 Locking clamp with slot




HR19xx – Installation drawing

② Maximum depth of top cabinet , ② Minimum distance to bottom edge of top cabinet , ② Distance from the floor to cooktop surface , ② Minimum distance to combustible surfaces , E = Electric connection , W = Water connection , G = Gas connection , (A) Width of cabinet opening , (B) Minimum distance between the top of the cooking area and the bottom of an unprotected combustible surface. Minimum distance to a protected combustible surface or when a Miele Ventilation Hood is installed. For all other Hoods please consult the manufacturer's specifications for required distances. , (C) Maximum connection width right and left , (D) Maximum connection height , (E) Maximum connection depth

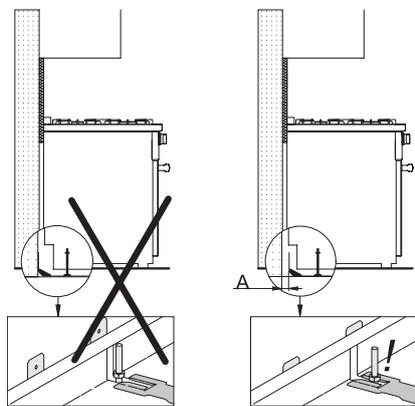


HR11xx, HR19xx, HR17xx – Installation drawing

A = Distance between the rear of the range to the supporting wall

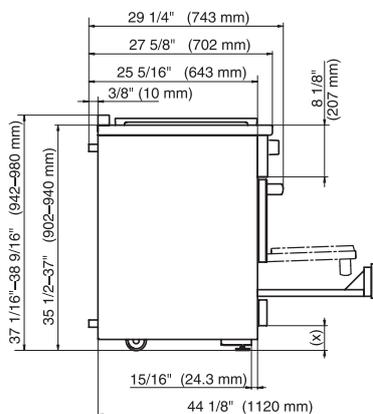

HR1954-3, HR1955-3, HR1956-3, Side view, (\*Fußnote) installation drawing

(x) = Depending on the appliance height adjustment: 4" – 5 1/2" (101.6 mm – 139.7 mm)

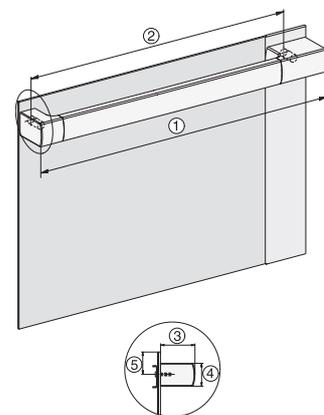

HR1954-3, HR1955-3, HR1956-3 installation drawings

48", ② 221/16" / 560,55 mm, ② 18" / 456,55 mm, ② 2 1/2" / 64 mm, ② 1 11/16" / 43 mm, ② 1 1/2" / 38,5 mm

