


Setting up the mouse


- 1 Plug the USB dongle (1) into a USB port on the computer.
- 2 Slide the power button (2) on the bottom of the mouse to the right to turn on the mouse. The computer detects the mouse.

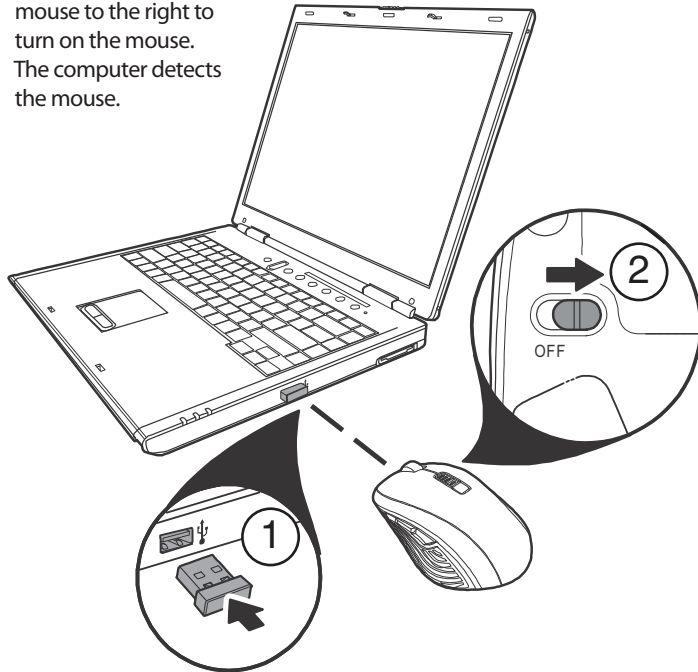

Installing the mouse driver and software

To use advanced features such as dynamic search and magnifier, you must install the mouse driver and software. See your *User Guide* for more information.

Congratulations on your purchase of the 2.4 GHz ergo laser mouse. This mouse represents the state of the art in wireless mouse design and is designed for reliable and trouble-free performance.

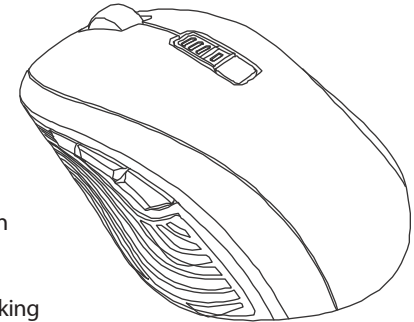

Features

- Nano dongle
- 2.4 GHz wireless connection
- Tilt/scroll wheel
- Six mouse buttons
- Excellent performance working range of more than 32.8 feet (10 meters) (with no interference)
- Four LED indicators

Package contents


- Mouse
- Nano dongle
- Installation CD (includes software and *User Guide*)
- AA battery
- Quick Start Guide*

System requirements

- USB port (USB 2.0 or 1.1)
- CD drive
- Operating system: Windows® XP with Service Pack 3 or higher, Windows Vista®, or Windows® 7

Top


- 1 A button**—Press to go to the previous page in a Web browser.
- 2 C button**—Press to activate dynamic search. You must install the mouse driver to use this feature.
- 3 B button**—Press to go to the next page in a Web browser.
- 4 Left button**—Press to perform standard left-button actions.
- 5 DPI button**—Press to select the screen resolution.
- 6 Battery LED**—Lights red when the battery is low.
- 7 DPI LED**—Indicates the current DPI setting.
- 8 Scroll wheel**—Roll to move the screen image up or down or tilt to move the screen left or right.
- 9 Right button**—Press to perform standard right button actions.

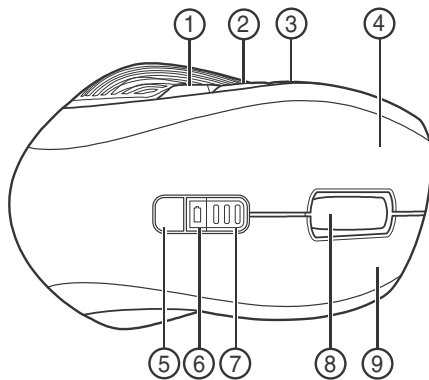


Top

Bottom

- 10 Battery compartment**—Provides storage for the battery and dongle.
- 11 Laser sensor**
- 12 Power button**—Slide to turn the mouse on or off.

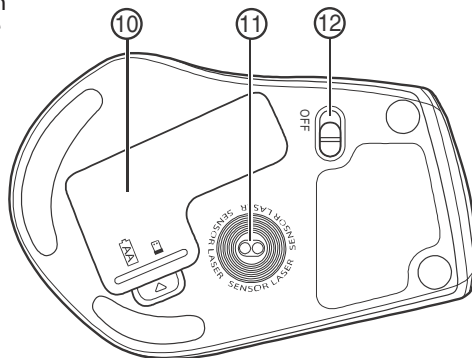

Bottom

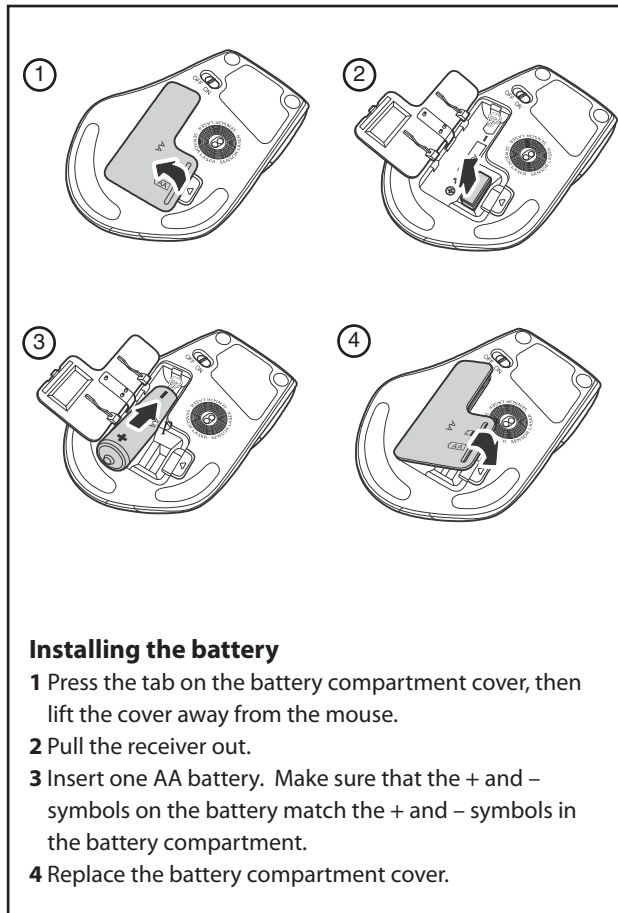

Installing the battery

- 1** Press the tab on the battery compartment cover, then lift the cover away from the mouse.
- 2** Pull the receiver out.
- 3** Insert one AA battery. Make sure that the + and – symbols on the battery match the + and – symbols in the battery compartment.
- 4** Replace the battery compartment cover.