



Tesla to J1772 Adapter

Quick Start Guide

The information in this manual is subject to change without notice.


www.rexingusa.com

Overview

Thank you for choosing **REXING!**

We hope you love your new products as much as we do. If you need assistance, or have any suggestions to improve it, please contact us.

 **care@rexingusa.com**

 **(877) 740-8004**

Our support team will respond to you as soon as possible.

Always a surprise with Rexing

Check us out here.

- <https://www.facebook.com/rexingusa/>
- <https://www.instagram.com/rexingdashcam/>
- <https://www.rexingusa.com/support/registration/>

 **Facebook**



 **Instagram**



 **Site**



 **Product Support**



Important

This adapter is designed for use with any EV vehicle that has a J1772 charge port. With this adapter, you can charge at 40A, 48A, & 80A Level 1 and Level 2 Tesla charging stations. NOT compatible with Tesla Superchargers.


Caution

- Please, keep away from and out of reach of children
- Clean only with a dry cloth
- Handle with care: maintain a firm grip; do not drop


Compatibility

This adapter is compatible with Nacs I High Powered Wall Connectors, all generations of Destination Chargers, & Mobile Connectors. CE FCC certified. Meets all safety guidelines.

What's in the box?



1



2




3

1. Tesla to J1772 Adapter
2. Travel Case
3. Users Manual

Product Overview

This adapter allows EVs that have a J1772 charge port to charge at any Level 1 & Level 2 Tesla Charging Station.

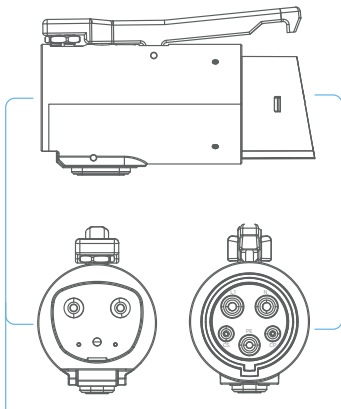



Nacs Plug - NACS

J1772 Plug

This adapter is designed to be durable and compact, making it easy to travel with and charge conveniently on-the-go.

Installation

First, plug the Nacs/Tesla to J1772 adapter into the charging station. Next, follow the directions on the charger screen. Then, plug the connector into your charge port until it clicks firmly into place.



The Nacs/Tesla To J1772 adapter allows you to charge any EV (Hyundai, Ford, KIA, Polestar, VinFast, Lexus, Toyota, etc.) at public Tesla charging stations (except for Superchargers).

Note

When the adapter socket end is inserted into the Tesla charging plug, it can realize the interchange charging between the US standard AC charging plug and the Nacs charging plug.

Specifications

Power	Charging speeds up to 20kW
Rated Voltage	250V
Amperage	Up to 80A
Conductor Material	Titanium Copper Alloy
Shell Material	PC+ABS (Insulator inflammability UL94 VO)
Operating Temperature:	-22°F to 185°F
Storage Temperature	-40°F to 185°F
Security	One Level switch
Sealing gasket	Silicon rubber.
Security	Locks into the vehicle while charging.
Certification	CE, FCC
Degree of protection	IP54 (Protection from dirt, dust, oil, and other non-corrosive material. Complete protection from contact with enclosed equipment. Protection from water, up to water projected by a nozzle against enclosure from any direction).

Warranty & Support

Warranty

The Rexing Tesla to J1772 Adapter comes with a full 12-month warranty. If you register your product on our official site (<https://www.rexingusa.com/support/registration>), you can extend the warranty to 18 months.

Support

If you have any questions regarding your product, please do not hesitate to contact us at care@rexingusa.com, or call us at (877) 740-8004. Queries are typically answered within 12-24 hours.

Your opinion matters

Rexing is firmly committed to always improving our products, services, and user experience. If you have any thoughts on how we can do even better, we welcome your constructive feedback and suggestions.

Connect with us today at care@rexingusa.com

Thank you for choosing Rexing!

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

REXING®



MADE IN CHINA