

ViewSonic® PROJECTOR

PX747-4K


Key Features

True 4K UHD | Bright Images Anywhere |
Gaming on 4K UHD Big Screen | Images
with More Depth | Advanced Image
Processor



Product Description

The PX747-4K is a high brightness 3500 ANSI Lumens 4K UHD projector for living room entertainment. Packed with 3500 ANSI Lumens of brightness, this projector is guaranteed to project high quality images in any lighting. PX747-4K leverages the latest XPR technology to project 8.3 megapixels of true 4K UHD resolution for maximum big screen detail. The projector supports HDR and Rec. 2020 enhanced content to produce highly detailed images with more information in the darker and brighter part of a scene for an unmatched viewing experience. Dual HDMI inputs offer quick connection to an array of devices, while the integrated USB power supply can be used as a power source for connected dongles and devices. Frequent projector users will rejoice at PX747-4K's long lamp life of up to 15,000 hours in SuperEco Mode* which drastically reduces lamp replacement and maintenance costs.

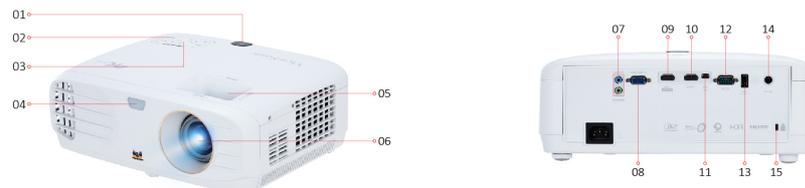

1. Power key & Top IR
2. Keypad
3. LED indicator
4. Front IR
5. Zoom/Focus
6. Projection lens

7. Audio in/out
8. Computer in
9. HDMI 1 (HDCP 2.2)
10. HDMI 2
11. Mini USB for service
12. RS232

13. USB 5V/1.5A out
14. 12V Trigger
15. Kensington lock

Visit Us  www.viewsonic.com

SPECIFICATION

Projection system:	0.47" 4K UHD
Native Resolution:	3840x2160
DC type:	DC3
Brightness:	3500 ANSI Lumens
Contrast Ratio with SuperEco mode:	12000:1
Display Color:	1.07 Billion Colors
Light Source:	Lamp
Light source life (Nor/SuperEco):	4000/15000
Lamp Watt:	240W
Lens:	F=1.94-2.06, f=15.57-18.67mm
Projection Offset:	120% +/-6%
Throw Ratio:	1.47-1.76
Image size:	30" - 300"
Throw Distance:	0.97m-11.69m (100"@3.26m)
Keystone:	±40° (Vertical)
Optical Zoom:	1.2x
Audible Noise (Eco):	27dB (Silence mode)
Resolution Support:	VGA (640 x 480) to 4K (3840 x 2160)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 2160p
Horizontal Frequency:	15K~135KHz
Vertical Scan Rate:	23~120Hz

INPUT

Computer in (share with component):	1
Audio-in (3.5mm):	1
HDMI (HDCP):	2 (HDMI 2.0/HDCP2.2 x1, HDMI1.4/HDCP 1.4 x1)

OUTPUT

Audio out (3.5mm):	1
Speaker:	10W
USB type A (Power):	1 (5V/1.5A)
12V Trigger:	1

CONTROL

RS232:	1
USB type mini B (Services):	1

OTHERS

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz AC
Power Consumption:	Normal: 330W Standby: <0.5W
Operating Temperature:	0~40°C
Carton:	Color
Net Weight:	4.2kg
Dimensions (WxDxH) w/adjustment foot:	332x261x135mm
Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, Arabic, Vietnamese

STANDARD ACCESSORY

Power Cord:	1
VGA cable:	1
Remote Control:	1 (with backlit)
QSG:	1

OPTIONAL ACCESSORY

Lamp/Light Source:	RLC-117
--------------------	---------