


Thank you for your purchase!

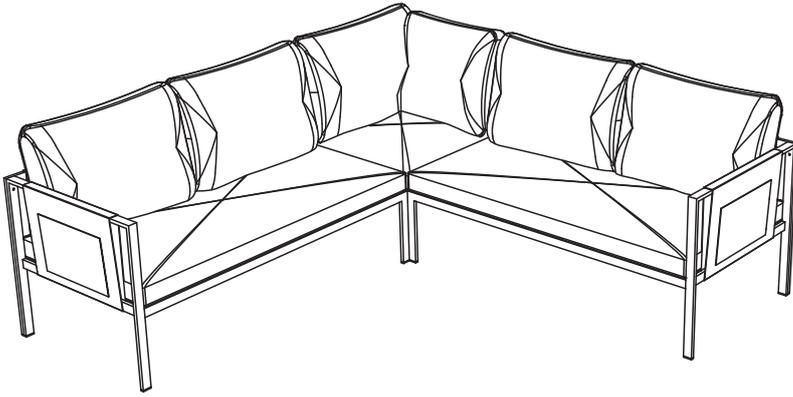

5 SEAT STEEL FRAME CUSHIONED PATIO SECTIONAL

ASSEMBLY INSTRUCTIONS

Before You Begin:

Please identify all component parts and hardware pieces required before your begin. Carefully remove all of the components from the packaging and set aside for assembly. Assemble on a soft surface to prevent scratching during assembly.

Caution:

Tighten all components securely before use. Failure to do so may result in personal injury. DO NOT use any sharp objects to open plastic wrapped components as damage to product or components may result.



Warning:

- CHOCKING HAZARD -Small Parts. Adult Assembly Required.
- DO NOT ALLOW CHILDREN TO CLIMB ON FURNITURE

Serious or fatal crushing injuries can occur from furniture tipping over. You must install the Tipping Restraint Hardware with the unit to prevent the unit from tipping and causing any accidental injury, instability, death or damage. The tipping restraint is intended only as a safety measure, it is not a substitute for proper adult supervision.










To help prevent furniture from tipping over it must be permanently attached to the wall. Anti-Tip Safety Wall Straps suitable the unit weight and wall materials (if not included) should be purchased and installed.

Online Assembly Instructions: <http://ftp.flashfurniture.com/AssemblyInstructions/GM-201108-SEC-CH-GG.pdf>

Customer Service email: CustomerExperience@belnickinc.com | Phone: 866-552-2810

GM-201108-SEC-CH-GG/GM-201108-SEC-GY-GG

PARTS


Part	Image	Description	QTY	Part	Image	Description	QTY
A		Left armrest <small>Note: Left armrest has magazine bag that faces outward</small>	1x	J		Smaller back cushion	1x
B		Right armrest <small>Note: Right armrest has magazine bag that faces outward</small>	1x	K		Standard back cushion	5x
C		Left Corner Back	1x	L		Corner seat cushion	1x
D		Right Corner Back	1x	M		2-Seat Cushion	2x
E		2-Seater back	1x	N		M6x15 Screw	2x
F		2-Seater back	1x	O		M6x25 Screw	16x
G		Left Side Seat	1x	P		M6x40 Screw	1x
H		Right Side Seat	1x	Q		Washer Ring	19x
I		Corner seat	1x	R		Allen Key	1x
				S		Fastener Strap	4x

STEPS


STEPS 1A & 1B PARTS REQUIRED

Part	Image	Description	QTY
E		2-Seater back	1x
G		Left Side Seat	1x
N		M6x15 Screw	1x
O		M6x25 Screw	3x
Q		Washer Ring	4x
R		Allen Key	1x

STEP 1 A: From inside of the frame, attach 2-Seater Back (Part E) to Left Side Seat (Part G) using (3) Washer Rings (Part Q) and (3) M6x25 Screws (Part O). Do not tighten completely

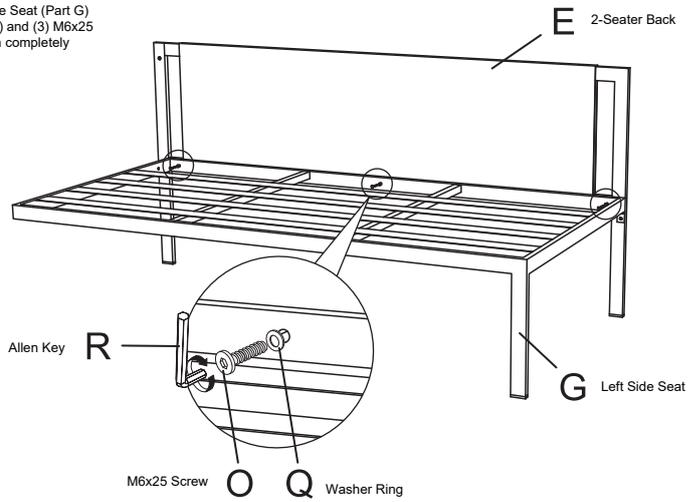


STEP 1 B: From inside of the frame, attach bottom flange of 2-Seater Back to Left Side Seat using (1) Washer Ring (Part Q) and (1) M6x15 Screw (Part N). Do not tighten completely

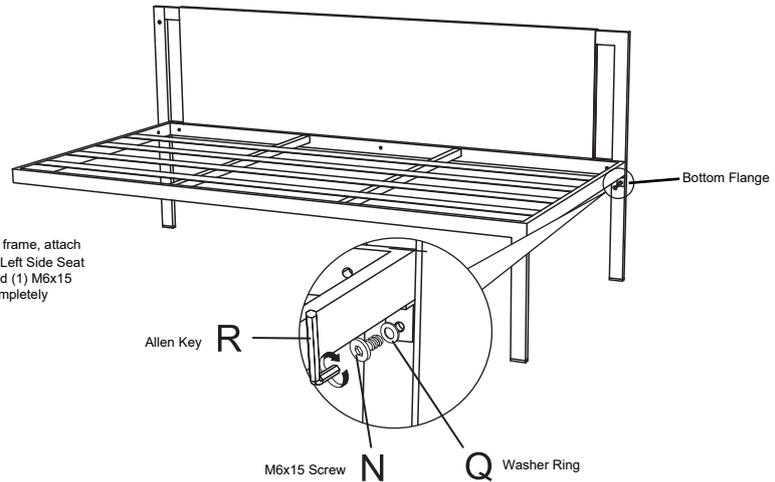

STEP 2 PARTS REQUIRED (Note: Part A has magazine bag)

Part	Image	Description	QTY
A		Left Armrest	1x
O		M6x25 Screw	3x
Q		Washer Ring	3x
R		Allen Key	1x

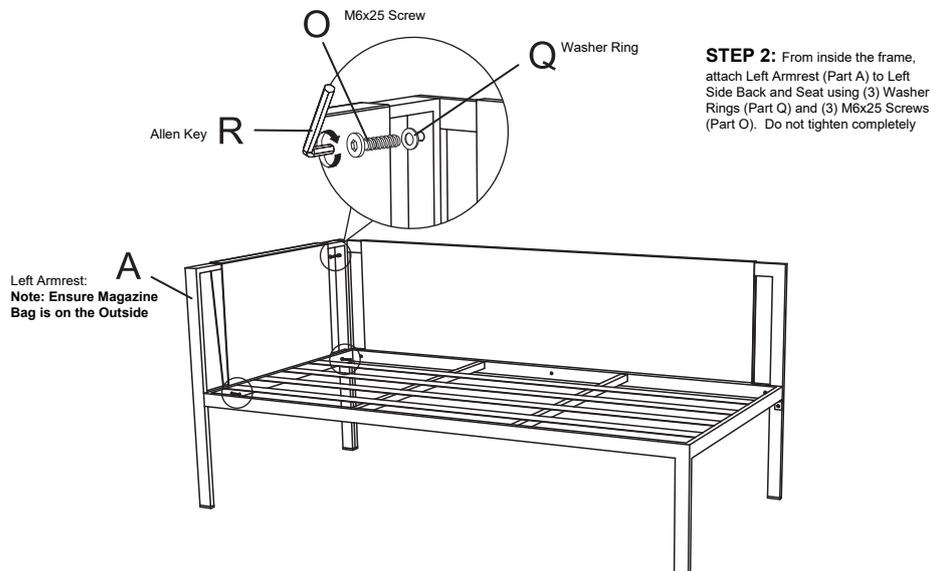



STEP 2: From inside the frame, attach Left Armrest (Part A) to Left Side Back and Seat using (3) Washer Rings (Part Q) and (3) M6x25 Screws (Part O). Do not tighten completely

STEPS

STEPS 3A & 3B PARTS REQUIRED

Part	Image	Description	QTY
F		2-Seater back	1x
H		Right Side Seat	1x
N		M6x15 Screw	1x
O		M6x25 Screw	3x
Q		Washer Ring	4x
R		Allen Key	1x

STEP 3 A: From inside of the frame, attach 2-Seater Back (Part F) to Right Side Seat (Part H) using (3) Washer Rings (Part Q) and (3) M6x25 Screws (Part O). Do not tighten completely

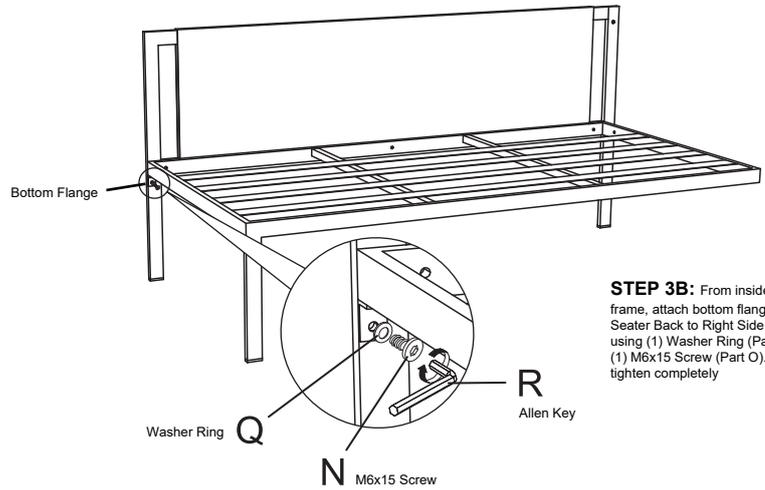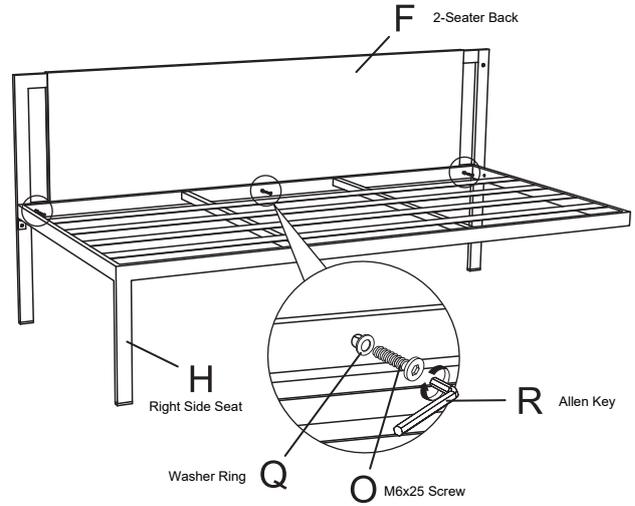


STEP 3B: From inside of the frame, attach bottom flange of 2-Seater Back to Right Side Seat using (1) Washer Ring (Part Q) and (1) M6x15 Screw (Part N). Do not tighten completely

STEP 4 PARTS REQUIRED (Note: Part B has magazine bag)

Part	Image	Description	QTY
B		Right Armrest	1x
O		M6x25 Screw	3x
Q		Washer Ring	3x
R		Allen Key	1x

STEP 4: From inside the frame, attach Right Armrest (Part B) to Right Side Back and Seat using (3) Washer Rings (Part Q) and (3) M6x25 Screws (Part O). Do not tighten completely

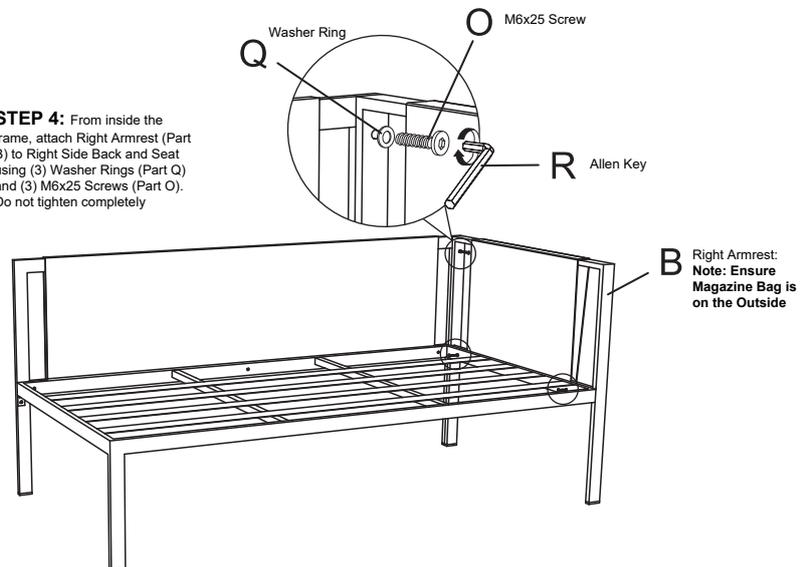


STEPS


STEP 5 PARTS REQUIRED

Part	Image	Description	QTY
C		Left Corner Back	1x
D		Right Corner Back	1x
I		Corner seat	1x
O		M6x25 Screw	4x
Q		Washer Ring	4x
R		Allen Key	1x

STEP 5A: From inside the frame, attach Right Corner Back (Part D) to Corner Seat (Part I) using (2) Washer Rings (Part Q) and (2) M6x25 Screws (Part O)

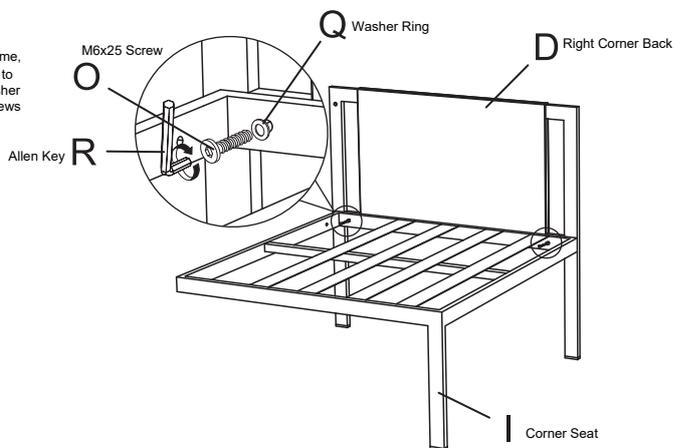


STEP 5B: From inside the frame, attach Left Corner Back (Part C) to Corner Seat (Part I) using (2) Washer Rings (Part Q) and (2) M6x25 Screws (Part O)

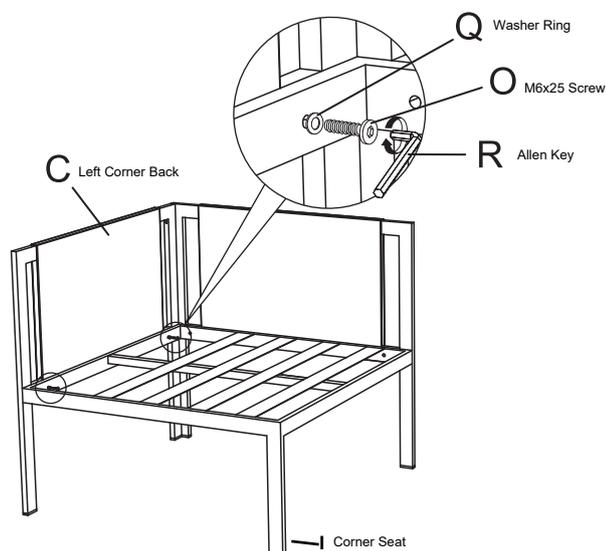

STEP 6 PARTS REQUIRED

Part	Image	Description	QTY
P		M6x40 Screw	1x
Q		Washer Ring	1x
R		Allen Key	1x

STEP 6: From inside the frame, attach upper corners of left and right corner seats using Washer Ring (Part Q) and M6x40 Screw (Part P). Securely tighten screws in all pieces


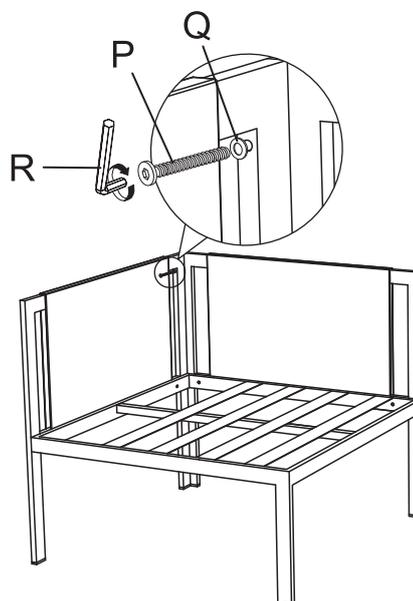


STEPS

STEP 7 PARTS REQUIRED

Part	Drawing	Description	QTY
S		Fastener Strap	4X

STEP 7: Join the left side seat, corner seat and right side seat together using (4) Fastener Straps (Part S)

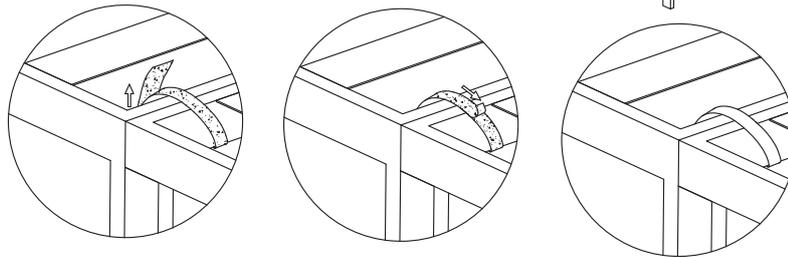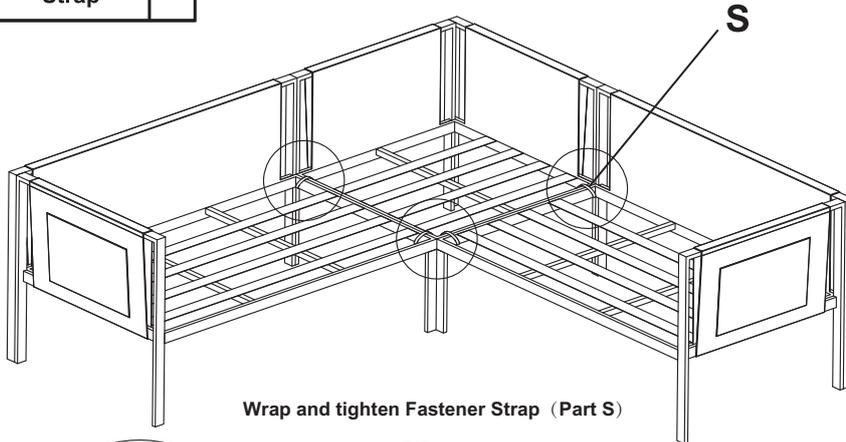

STEP 8 PARTS REQUIRED

Part	Image	Description	QTY
J		Small Back Cushion	1x
K		Standard back cushion	5x
L		Corner seat cushion	1x
M		2-Seat Cushion	2x

STEP 8: Add 2-Seat Cushions (Part M) to the left and right seats. Add Corner Seat Cushion (Part L) to the Corner Seat. Add (3) Standard Back Cushions (Part K) to the Left 2-Seater Back and Left Corner Back then add (2) Standard Back Cushions (Part K) to the Right 2-Seater Back. Add the Small Back Cushion (Part J) to the Right 2-Seater Back.

