

Key Features

Bright Images in Any Environment | Long Lamp Life |


Vertical Lens Shift | Cloud-based Color Profile

Exchange | SuperColor: Amazing Color Accuracy



Product Description


Ideal for both home entertainment and office use, the ViewSonic® PX701HD delivers stunning Full HD images for versatile projection. With 3,500 ANSI lumens, this high-brightness projector delivers clear pictures even in brightly lit rooms. What's more, an energy-saving SuperEco™ feature reduces power consumption and extends the lamp life by up to 20,000 hours,* effectively reducing lamp replacement and maintenance costs. A cloud-based vColorTuner™ feature allows users to customize and save color profiles, while exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment. Dual HDMI inputs and USB power supply delivers flexible connectivity options for gaming, movies, wireless dongles, and more.

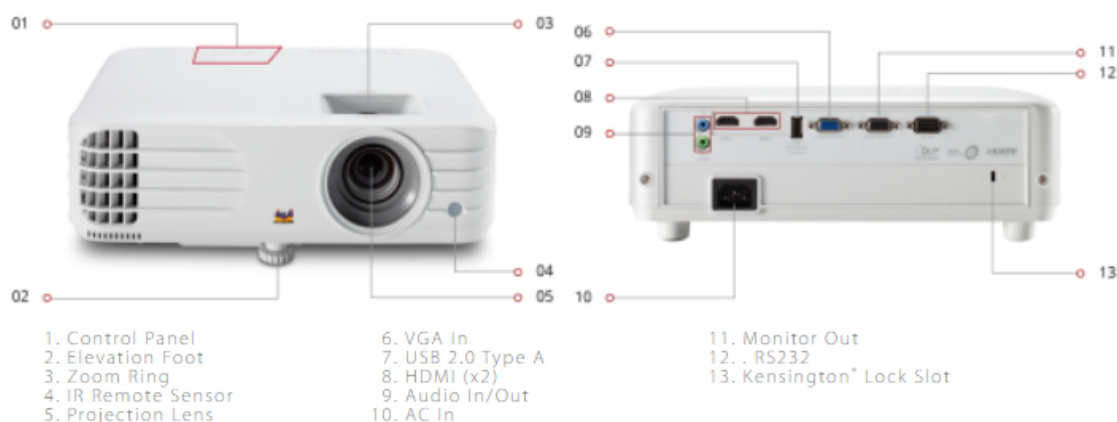

1920 x 1080
RESOLUTION



3,500 ANSI
LUMENS



1.5-1.65
THROW RATIO

Contact Sales

call: 888.881.8781

email: salesinfo@viewsonic.com

visit: viewsonic.com

Display:

Type:	DLP Lamp
Resolution Type:	Full HD (1920x1080)
Resolution:	1920 x 1080
Brightness (Lumens):	3,500 ANSI
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m

Weight (metric):

Net (kg):	2.6
Gross (kg):	3.8
Dimensions (imperial) (WxHxD):	
Packaging (in.):	16.3 x 6.6 x 11.7
Physical (in.):	12.2 x 4.4 x 8.7

Throw Distance:	1m~10.96m (100"~3.32m)
Throw Ratio:	1.5-1.65
Keystone:	Vertical (+/- 40°)
Lens:	1.1x optical zoom
Light Source (watt):	203
Light Source Life, Normal (hours):	5000
Light Source Life, Dynamic Eco-Mode (hours):	20000
Color Depth:	1.07 Billion Colors
Dynamic Contrast Ratio:	12,000:1
Aspect Ratio:	16:9

Video Signal:

Frequency Horizontal:	15K-102KHz
Frequency Vertical:	23-120Hz

Compatibility:

PC Resolution (max):	1920 x 1200
PC Resolution (min):	640 x 480
Mac® Resolution (max):	1920 x 1200
Mac® Resolution (min):	640 x 480

Connector:

USB 2.0 Type A(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS232) (1), HDMI 1.4 (with HDCP 1.4)(2), VGA In(1)

Audio:

Internal Speakers:	10W (x1)
--------------------	----------

Power:

Voltage:	100-240V+/- 10%, 50/60Hz AC
Consumption (typical):	300W
Stand-by:	<0.5W

Controls:

Physical Controls:	Keypad, Power key
On Screen Display:	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

Operating Conditions:

Temperature:	32 - 95° F (0 - 35° C)
--------------	------------------------

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Weight (imperial):

Net (lbs):	5.7
Gross (lbs):	8.3

Dimensions (metric) (WxHxD):

Packaging (mm):	415.0 x 168.0 x 297.0
Physical (mm):	312.0 x 108.0 x 222.0

General:

Regulations: cTUVus
PACKAGE CONTENTS: PX701HD projector, power cable, VGA cable, remote control, Quick Start Guide,
Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).
Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.
UPC: 766907001761

Accessories:

HB108, PJ-CASE-008, PJ-SCW-1001W, PJ-WMK-006, PJ-WMK-007, PM-FCP, RLC-119, VCB10, VSR100
--