

Café™ 21.3 Cu. Ft. Smart Built-In Bottom-Freezer Refrigerator

CDB36RP2PS1

CAFÉ

DISTINCT BY DESIGN™



CDB36RP2PS1
Stainless Steel with Brushed
Stainless handles



WARRANTY

| | |
|----------------|--|
| Labor Warranty | Limited 1-year entire appliance |
| | Limited 5-year sealed refrigerating system |
| Parts Warranty | Limited 1-year entire appliance |
| | Limited 5-year sealed refrigerating system |

FEATURES & BENEFITS

| | |
|---|--|
| Exterior style | Built-in |
| Total Capacity | 21.3 Cu. Ft. |
| FF Capacity | 15.0 Cu. Ft. |
| FZ Capacity | 6.3 Cu. Ft. |
| ADA Compliant | No |
| Energy Star | No |
| Depth | Built-In |
| Ice & Water Dispenser | No |
| Icemaker | Yes |
| Water Filtration | Yes |
| Control Type | Upfront Electronic Digital Temperature Display |
| Internal Lighting | LED |
| Colors Available | Stainless Steel |
| Case Color | Unfinished Sides or Panel Required |
| Claims & Certifications | MADE IN AMERICA, California Prop 65 |
| Configuration | Full door |
| Temperature management features | Multi-shelf air management tower; independent temperature controls |
| Cabinet shelves (total ff & fz) | 5 |
| Door bins (total ff & fz) | 6 |
| Fresh food cabinet shelves - total | 5 |
| Fresh food cabinet shelf features | 4 Adjustable glass; 1 fixed |
| Spillproof glass shelves | Yes |
| Fresh food cabinet pans/drawers | 4 |
| Clear bins and pans | Yes |
| Snack / deli drawer | 2 Snack drawers with full extension slides |
| Snack / deli drawer features | Sealed |
| Vegetable / fruit crisper(s) / produce pans | 2 Veg drawers with full extension slides |
| Produce drawer features | Sealed adj. humidity |
| Fresh food door bins | 6 |
| Fresh food door bins type | 4 Adjustable/ 2 gallon size fixed position |
| Freezer features | Freezer drawer with wire basket on full extension slides |
| Freezer cabinet shelves | 1 Freezer drawer/ice bucket on full extension slides |
| Independent utility basket | With full extension slides |
| Wire baskets | 2 |
| Filter change indicator | Yes - on upfront control |
| GE water filtration system | MWF - mounted in overhead machine compartment |
| Leveling system | 4 Point (2 adjustable back rollers, 2 adjustable front legs) |
| Refrigerant type | 134A |
| Sealed system design w/single compressor | Yes |
| Defrost type | Automatic defrost |
| Connected | ConnectPlus WiFi; App details; Display/change temperature; Alert if fresh food temperature is too high; Alert if freezer temperature is too high; Alert if water filter needs to be replaced; Alert for software OTA updates |

WEIGHTS & DIMENSIONS

| | |
|-----------------------------|-------------|
| Overall depth | 28-1/2 in. |
| Overall width | 36 in. |
| Overall height | 84 in. |
| Case depth without door | 23-5/8 in. |
| Depth without handle | 25-5/16 in. |
| Height to top of case | 83-1/2 in. |
| Approximate shipping weight | 640 lb. |
| Net weight | 610 lb. |


Café™ 21.3 Cu. Ft. Smart Built-In Bottom-Freezer Refrigerator

CDB36RP2PS1

CAFÉ

DISTINCT BY DESIGN™

DIMENSIONS AND INSTALLATION

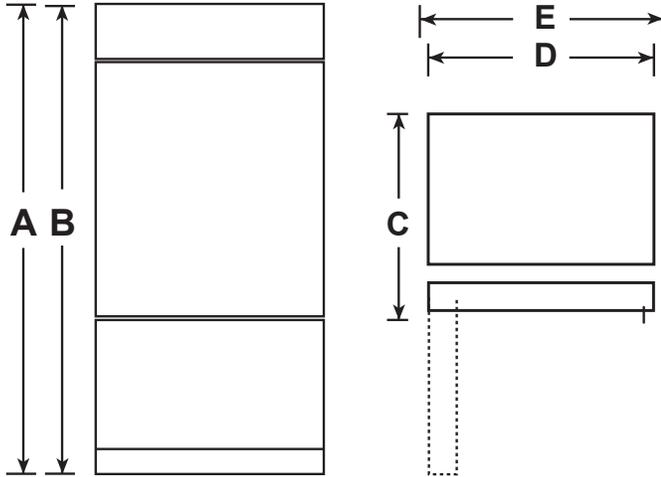

| Overall Weights & Dimensions | Weights & Dimensions | |
|--|---|----|
| | A - Overall Height to top of grill (in) | 84 |
| B - Height to Top of Case (in) | 83.5 | |
| C - Unit Depth With Door Closed With handle (in) | 28.5 | |
| D - Case Width (in) | 35 | |
| E - Overall Width (in) | 36 | |
| Approximate Shipping Weight (lb) | 640 | |
| Net Weight (lb) | 610 | |


Power / Ratings

Volts/Hertz/Amps 115V 60Hz 20A

**PRODUCT CLEARANCES

These refrigerators are equipped with a 3-position door stop. The factory set 115° door swing can be adjusted to 90° if clearance to adjacent cabinets or walls is restricted.

Allow full 130° door swings for pan removal. If the 90° door stop position is used, pan access is maintained, but pan removal is restricted.

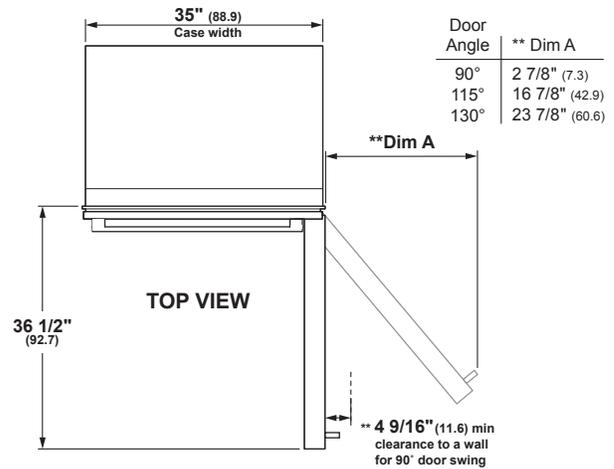

GROUNDING THE REFRIGERATOR

IMPORTANT—PLEASE READ CAREFULLY

FOR PERSONAL SAFETY, THIS APPLIANCE MUST BE PROPERLY GROUNDING.

The power supply cord of this appliance is equipped with a three-prong (grounding) plug which mates with a standard three-prong (grounding) wall receptacle to minimize the possibility of electric shock hazard from this appliance.


Have the wall outlet and circuit checked by a qualified electrician to make sure the outlet is properly grounded.

Where a standard 2-prong wall outlet is encountered, it is your personal responsibility and obligation to have it replaced with a properly grounded 3-prong wall outlet.

DO NOT UNDER ANY CIRCUMSTANCES, CUT OR REMOVE THE THIRD (GROUND) PRONG FROM THE POWER CORD.

DO NOT USE AN ADAPTER PLUG TO CONNECT THE REFRIGERATOR TO A 2-PRONG OUTLET.

DO NOT USE AN EXTENSION CORD WITH THIS APPLIANCE.

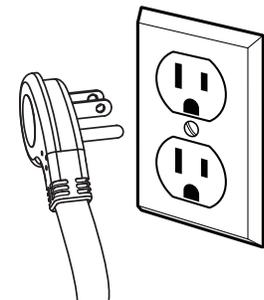

Café™ 21.3 Cu. Ft. Smart Built-In Bottom-Freezer Refrigerator

CDB36RP2PS1

CAFÉ

DISTINCT BY DESIGN™

DIMENSIONS AND INSTALLATION

SIDE PANELS

Side panels (not supplied) must be used whenever the sides of the refrigerator will be exposed. The 1/4" side panels will slip into the side case trim. Order side panels from your cabinet manufacturer.
*Depending on installation height.

FLOORING

For proper installation, this refrigerator must be placed on a level surface of hard material that is at the same height as the rest of the flooring. This surface should be strong enough to support a fully loaded refrigerator, or approximately 1500 lbs.

NOTE: Protect the finish of the flooring. Cut a large section of the cardboard carton and place under the refrigerator where you are working.

WATER AND ELECTRICAL LOCATIONS

The opening must be prepared with the electrical and water supply located as shown.



THE CUTOUT DEPTH MUST BE 24"

The refrigerator will project forward, slightly beyond adjacent cabinets, depending on your installation.

ADDITIONAL SPECIFICATIONS

A 120 volt, 60Hz, 15 or 20 amp power supply is required. An individual properly grounded branch circuit or circuit breaker is recommended.

Install a properly grounded 3-prong electrical receptacle recessed into the back wall. Electrical must be located on rear wall as shown.

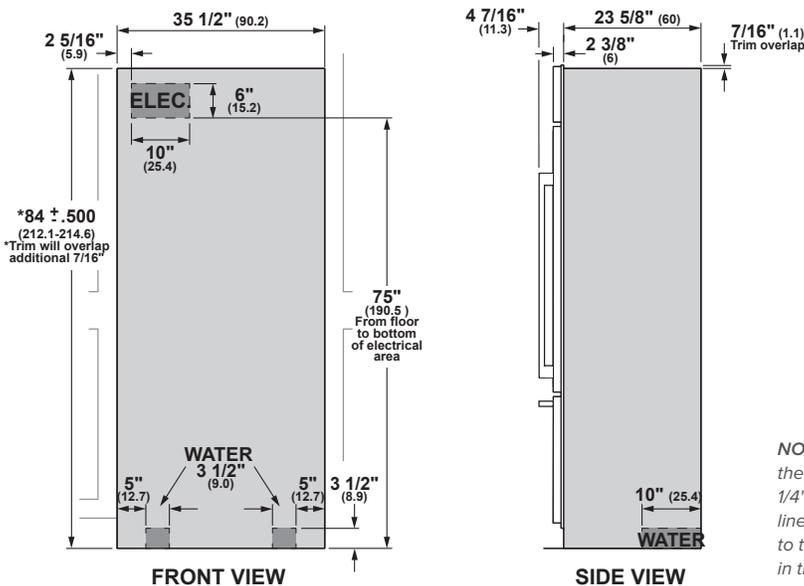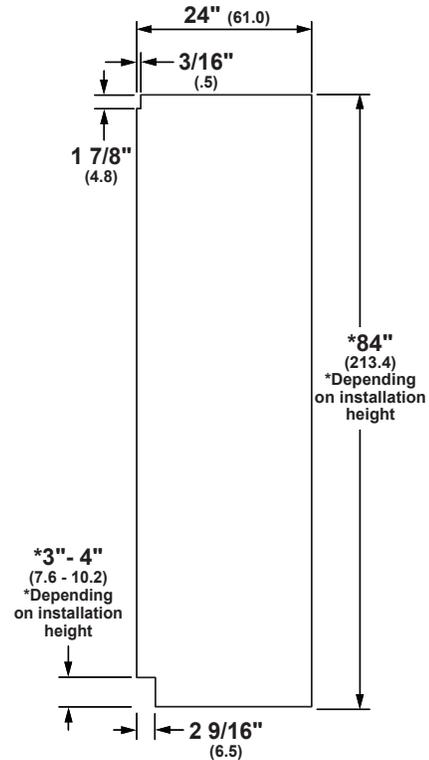

NOTE: GFI (ground fault interrupter) is not recommended. Water line can enter the opening through the floor or rear wall. The water line installed should be 1/4" O.D. copper tubing or GE SmartConnect™ tubing between the cold water line and water connection location. The line should be long enough to extend to the front of the refrigerator. Installation of an easily accessible shutoff valve in the water line is required.


Café™ 21.3 Cu. Ft. Smart Built-In Bottom-Freezer Refrigerator

CDB36RP2PS1


CAFÉ

DISTINCT BY DESIGN™

OVERALL DIMENSIONS

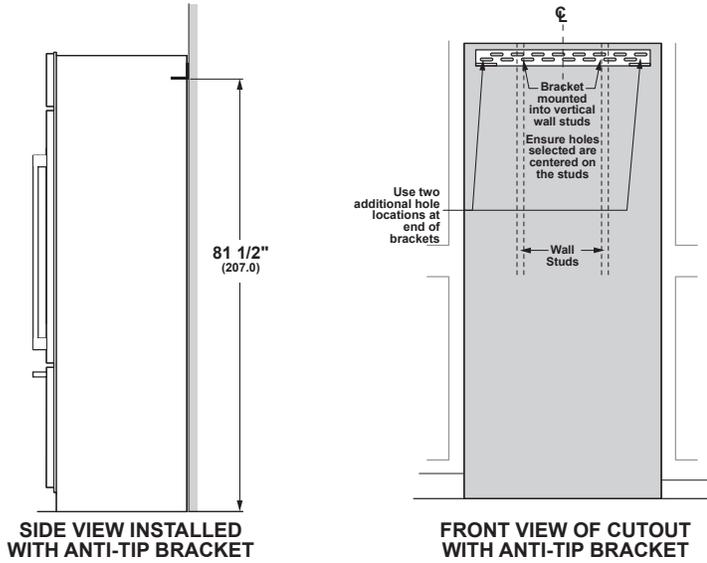

CUSTOM SIDE PANELS

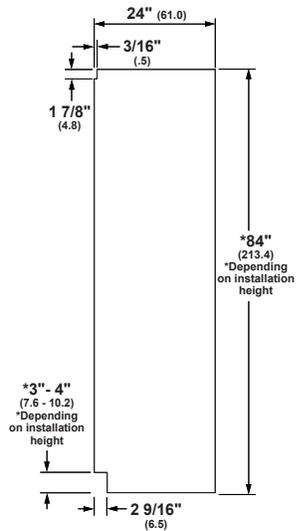

ADDITIONAL ACCESSORIES



CXSB2H2PPBZ
Brushed Bronze
Optional Kits



CXSB2H2PPBT
Brushed Black
Optional Kits



CXSB2H2PPCU
Brushed Copper
Optional Kits