



THRU-THE-WALL AIR CONDITIONER WITH REMOTE



TTW COOL

8K | 10K | 12K | 14K BTU



QUALITY AIR FLOW

This AC's 4-way ventilation ensures even and consistent cooling throughout your space.



WORKS WITH SMART HOME DEVICES

This thru-the-wall unit works with smart home devices like Amazon Alex and Google Assistant so you can control it with simple voice commands.



BUILT-IN DEHUMIDIFIER

Set the thru-the-wall unit to Dry Mode to pull moisture from the air and improve your space's air quality.



REMOTE ACCESSIBLE:

Don't get up, use this AC's included remote or the TCL Home app to control its settings from a distance.



ENERGY EFFICIENT:

This unit's Sleep and Eco settings help minimize costs and keep your energy bill low.

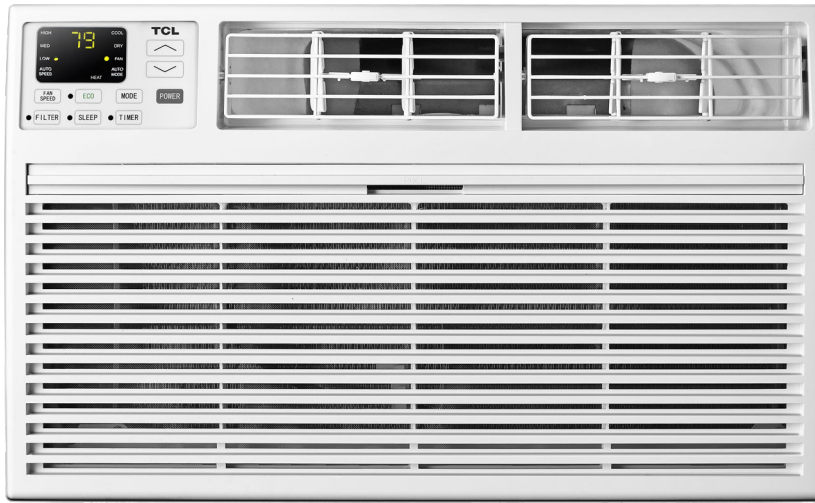








MULTIPLE FAN SPEEDS

Choose from low, medium, high, and automatic fan speeds to find the right balance and keep things comfortable.



With a lineup of award-winning televisions, audio products, mobile devices, and appliances, TCL delivers meaningful experiences through thoughtful design and the latest technology, helping you enjoy more of the things you love.



MODEL	THRU-THE-WALL AIR CONDITIONER					
SKU	H8T9E1-A	H10T9E1-A	H10T9EX1-A	H12T9E1-A	H12T9EX1-A	H14T9EX1-A
BTU/H	8,000	10,000	10,000 / 9,800	12,000	12,000 / 11,600	14,000 / 13,600
Application Area (Cooling EPA)	300-350 sq. ft.	400-450 sq. ft.	400-450 sq. ft.	450-550 sq. ft.	450-550 sq. ft.	450-550 sq. ft.
Power Supply (Ph-V-Hz)	1Ph-115V-60Hz	1Ph-115V-60Hz	1Ph, 230/208V, 60Hz	1Ph-115V-60Hz	1Ph, 230/208V, 60Hz	1Ph, 230/208V, 60Hz
Cooling Speeds	Fan - Mute - Low - Medium - High					
Estimated Yearly Energy Cost	77	96	96	114	114	143
Control	Remote - Included					
Max. Input Consumption (W)	1000.00	1200.00	1200.00	1400.00	1400.00	1780
Product Dimensions (WxDxH)	24.21 in x 20.28 in x 14.53 in					
Net Weight	60.6 lbs	65.0 lbs	63.9 lbs	69.4 lbs	71.7 lbs	72.8 lbs
Wall Sleeve Size Requirement (WxDxH)	26 in x 20 in x 15.75 in					
RATED CEER (Btu/w.h,w/w)	10.1	10.1	10.1	10.00	10.10	9.3 / 9.5
RATED Input (W)	790	980.00	980 / 960	1160.00	1160 / 1130	1460 / 1400
RATED Current (A)	8.5	11.00		11.50	5.1 / 5.4	7.5 / 8.5
Refrigerant	R32	R32	R32	R32	R32	R32
Temperature Range	61°-88°	61°-88°	61°-88°	61°-88°	61°-88°	61°-88°
Plug Type	14#x3 / LCDI	14#x3 / LCDI	14#x3 / LCDI	14#x3 / LCDI	14#x3 / LCDI	14#x3 / LCDI
Plug Face	 115V / 15 AMP	 115V / 15 AMP	 15A / 230 V	 115V / 15 AMP	 15A / 230 V	 20A / 230 V