



THRU-THE-WALL AIR CONDITIONER WITH HEAT AND REMOTE



TTW HEAT

8K | 10K | 12K | 14K BTU



QUALITY AIR FLOW

This AC's 4-way ventilation ensures even and consistent cooling throughout your space.



WORKS WITH SMART HOME DEVICES

This thru-the-wall unit works with smart home devices like Amazon Alexa and Google Assistant so you can control it with simple voice commands.



BUILT-IN DEHUMIDIFIER

Set the thru-the-wall unit to Dry Mode to pull moisture from the air and improve your space's air quality.



REMOTE ACCESSIBLE:

Don't get up, use this AC's included remote or the TCL Home app to control its settings from a distance.



ENERGY EFFICIENT:

This unit's Sleep and Eco settings help minimize costs and keep your energy bill low.








MULTIPLE FAN SPEEDS

Choose from low, medium, high, and automatic fan speeds to find the right balance and keep things comfortable.

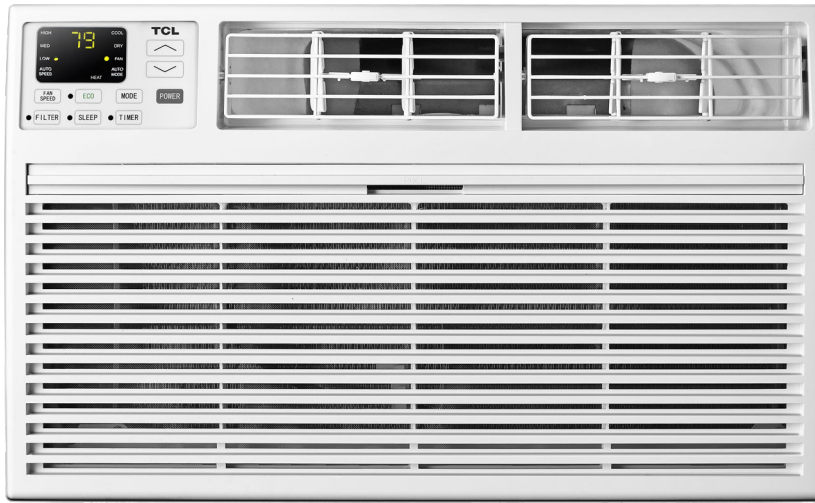

With a lineup of award-winning televisions, audio products, mobile devices, and appliances, TCL delivers meaningful experiences through thoughtful design and the latest technology, helping you enjoy more of the things you love.



MODEL	THRU-THE-WALL AIR CONDITIONER			
SKU	H8T91H-A	H10T9XH-A	H12T9XH-A	H14T9XH-A
BTU/H	8,000	10,000 / 9,800	12,000 / 11,600	14,000 / 13,600
Application Area (Cooling EPA)	300-350 sq. ft.	350-450 sq. ft.	450-550 sq. ft.	550-700 sq. ft.
Power Supply (Ph-V-Hz)	1Ph, 115V~, 60Hz	1Ph, 230/208V~, 60Hz	1Ph, 230/208V~, 60Hz	1Ph, 230/208V~, 60Hz
Cooling Speeds	Fan - Mute - Low - Medium - High			
Estimated Yearly Energy Cost	77	96	114	143
Control	Remote - Included			
Max. Input Consumption (W)	1027	1340	1570	1780
Product Dimensions (WxDxH)	24.21 in x 20.28 in x 14.53 in			
Net Weight	62.8 lbs	65.9 lbs	72.3 lbs	74.5 lbs
Wall Sleeve Size Requirement (WxDxH)	26 in x 20 in x 15.75 in			
RATED CEER (Btu/w.h,w/w)	9.6	9.6	9.6	9.3/9.5
RATED Input (W)	790	980 / 960	1160 / 1130	1460 / 1400
RATED Current (A)	8.5	5.5 / 6.0	6.5 / 7.0	7.5 / 8.5
Refrigerant	R32	R32	R32	R32
Temperature Range	61°-88°	61°-88°	61°-88°	61°-88°
Plug Type	14#x3 / LCDI	12#x3 / LCDI	12#x3 / LCDI	12#x3 / LCDI
Plug Face	 115V	 230V	 230V	 230V