

DAS 2920

Built-in ventilation hood
with EasySwitch controls for convenient operation




- Classic design – stainless-steel panel, 90 cm wide
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover
- Recirculation mode – Active AirClean or Longlife AirClean filter

EAN: 4002516495857 / Material number: 11878500 /
Old Material Number: 28S2920SUSA

Design	
Built-in ventilation hood	•
Operating modes	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151,DUU 150
OdorFree charcoal filter (order separately)	DKFS 31-R, DKFS 31-900 P
Design	
Color	Stainless steel
User convenience	
Electronic controls	•
EasySwitch	•
Booster levels	1
Cleaning convenience	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	1
Lighting	
Number x W	1 x 3,0 W
Light intensity in Lx	300 lx
Color temperature in K	3500 Kelvin
Blower	
Dual-action blower	•
AC motor	•
Exhaust air	
Air throughput in CFM in Booster	427
Safety	
Safety shut-off	•
Technical data	
Canopy width in in.(mm)	35 3/8 (896)
Canopy height in in.(mm)	1 1/2 (36)
Canopy depth in in.(mm)	10 3/4 (273)
Net weight in lbs. (kg)	36 (16.0)
Length of electrical wire in ft (m)	2 (0.8)
Standard plug fitted	•
Minimum height above electric cooktops in mm	24 1/8 (610)
Minimum safety distance above gas cooktops (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Number of phases	1
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15
Frequency in Hz	60
Installation note	
Vent connection at top	•
Standard accessories	
Non-return flap	•

DAS 2920

Built-in ventilation hood
with EasySwitch controls for convenient operation

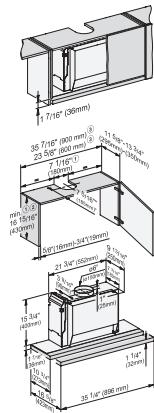

DAS2920, DAS4920, drawing – US

- 1) Exhaust air, mounted accessories must be taken into account for dimensions of cabinet height and cutouts., 2) Exhaust air, recirculation with DUU 150 conversion kit., 3) Installation is also possible in a 600 mm wide cabinet.,,
*In this installation situation, the screen is flush with the front edge of the cabinet. If the cooker hood is positioned further to the front or rear (e.g. when using a front panel), the dimensions must be adjusted accordingly.